

# INSTALLATION INSTRUCTIONS

## SL79002, SL79005

### Wiring:

Black [terminal 2] = Fan Motor

Red [terminal 1] = Common

Brown [terminal 3] = Defrost



Disconnect power before servicing equipment.

### Specifications:


On Rise 1 & 3 open, 1 & 2 close

On Fall 1 and 2 open, 1 & 3 close

SPDT 25 amp resistive @ 120/240 VAC

**SL79002:** OPEN @  $55^{\circ}\text{F} \pm 6^{\circ}\text{F}$  | CLOSE @  $30^{\circ}\text{F} \pm 6^{\circ}\text{F}$

**SL79005:** OPEN @  $65^{\circ}\text{F} \pm 6^{\circ}\text{F}$  | CLOSE @  $30^{\circ}\text{F} \pm 7^{\circ}\text{F}$

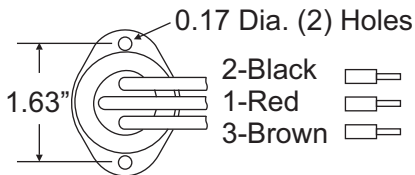

20314

800.333.9125  
techsupport@supco.com  
www.supco.com