

SUPR & APR5 UNIVERSAL POTENTIAL RELAYS

Replacing all potential relays, these universal potential relays offer the ultimate in convenience. Choose to “drop in” the wire to wire SUPR or “dial in” the exact pick up voltage for the APR5.


SUPR Universal Potential Relay

- Time Function Relay
- Start Time: 1.0 to 1.5 Seconds



APR5 Adjustable Potential Relay

- Voltage Sensitive Relay
- Adjustable Pick-up Voltage
- Safety Timeout 1.0 to 1.5 Seconds

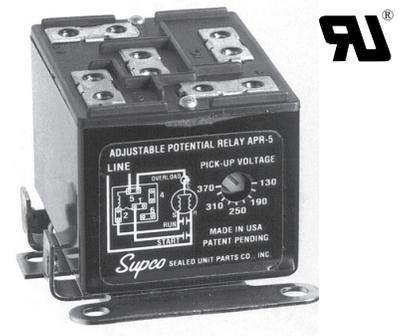

APR5/SUPR Common Specifications

APR5/SUPR Common Specifications	
Operating Voltage	110 - 270 VAC, Single Phase
Amperage	30 Amps
Motor Power Rating	Up to 5 hp
Operating Position	Non-Positional Mounting
Universal Mounting Bracket	Allows for easy installation. Unused portion of the bracket simply snaps off with pliers
Terminals	Screw or push-on. Adapters to convert screw-on to push-on are provided
Dimensions	1.75W x 2.25L x 1.50H