

OFFICE 200 DIRECTIONAL/PANEL

SKU: 50 Ohm: 475047 **MAP:** \$1,699.99

FEATURES

- Ideal amplifier system for small-to-medium businesses
- Covers up to 10,000 square feet
- Comes with LCD touch screen for increased usability
- Allows manual control of frequency bands
- Is FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular, and more



KIT INCLUDES

475047
50 Ohm
Directional/Panel Kit

Office 200
Booster

Outside Directional
Antenna
314411

Inside Panel
Antenna
311234

Lightning Surge
Protector
859902

2ft Low-Loss
Wilson400 Cable
952302

60ft Low-Loss
Wilson400 Cable
952360

75ft Low-Loss
Wilson400 Cable
952375

ABOUT

weBoost **Office 200 (Directional/Panel)** kit is our most powerful booster for small businesses or warehouses in rural areas. Target the nearest tower with the included outside directional antenna to powerfully boost coverage. Once securely mounted to a wall, the inside panel antenna broadcasts the amplified signal in a wide area. The 5G-compatible, 50-ohm-kit immediately improves coverage on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular, and more. With XDR technology, the booster will never shutdown and continually optimize signal. All components needed for do-it-yourself installation are included. The Office 200 comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.


This kit is only available at 50 ohms.

SPECIFICATIONS

SKU NUMBER	475047†	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	72 dB	
IMPEDANCE	50 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	14.25 × 10.75 × 2.25 in	
BOOSTER WEIGHT	7.7 lbs	

†WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


HOW IT WORKS

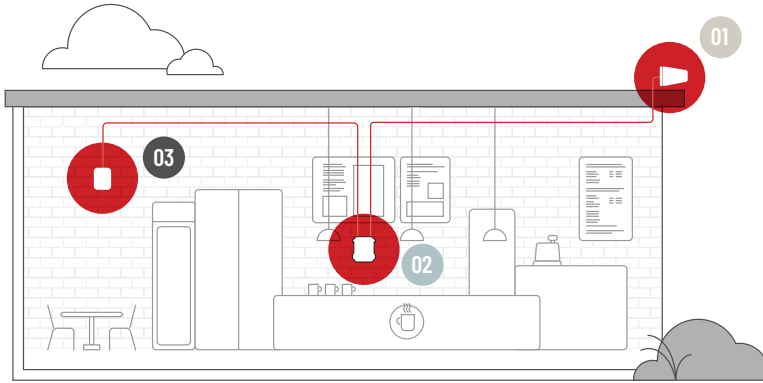

- 01 Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 02 Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- 03 Inside antenna:** The inside antenna broadcasts these signals for use throughout your business.


PACKAGE DIMENSIONS

13.125 L x 19.125 W x 13.625 H

13.125 in. x 13.625 in.	19.125 in. x 13.625 in.	13.125 in. x 19.125 in.	 21.6 lbs.
FRONT	SIDE	TOP/BOTTOM	WEIGHT

MASTER CARTON: 13.125 L x 19.125 W x 13.625 H | 21.6 lbs. | Qty 1

SUPPORT

 **3-Year Warranty from Purchase.**

Website: <http://support.weboost.com>

Phone: +1 866 294 1660
Monday to Saturday



UPC

