

2"

45361 HIGH OUTPUT ROUND FIXED DOWNLIGHT



2700K . 3000K . 3500K . 4000K . 5000K

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase or 0-10V dimming power supply.

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

- Cut hole: ϕ 2 7/8".
- Fixture: ϕ 3 1/8" x 5"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC/ELV or 0-10V dimming.
- Min operating temperature (-4°F~104°F) (-20°C~40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 887 lm | 942 lm | 1040 lm | 1077 lm | 1048 lm

CERTIFICATIONS



ORDERING GUIDE

MODEL	FINISH	DIMMING
45361-029	Black	Triac/ELV
45361-012	White	Triac/ELV
45361-012-0	White	0-10V

ACCESSORIES



45612-015
60"
3 pin Connector



45363-016
NEW CONSTRUCTION
SMASH PLATE
13 1/4" x 6 1/2"
 ϕ 2 3/4"



47205-017
15W REMOTE
EMERGENCY
BACKUP BATTERY



NO IC BOX
REQUIRED

PROJECT:

TYPE:


DATE:

NOTES:

WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE	
2 7/8"	15W	Up to 1077	CCT Selectable	TRIAC/ELV or 0-10V	90+	38°	NO




PRODUCT DIMENSIONS

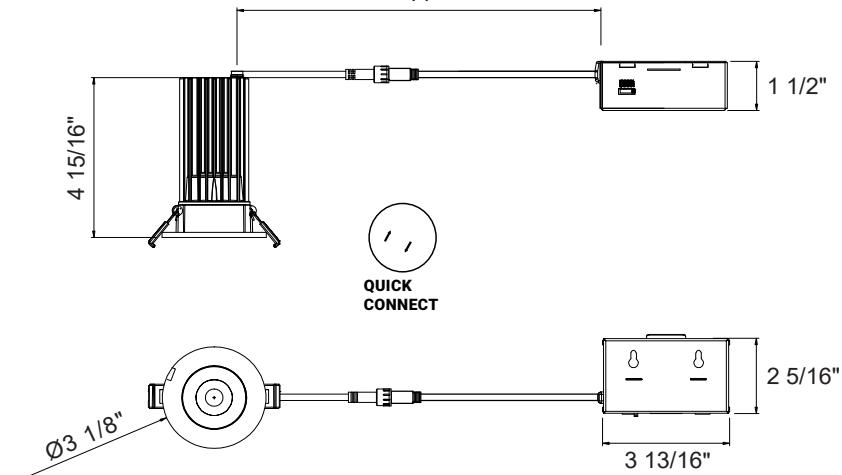

PHOTOMETRICS

Imperial

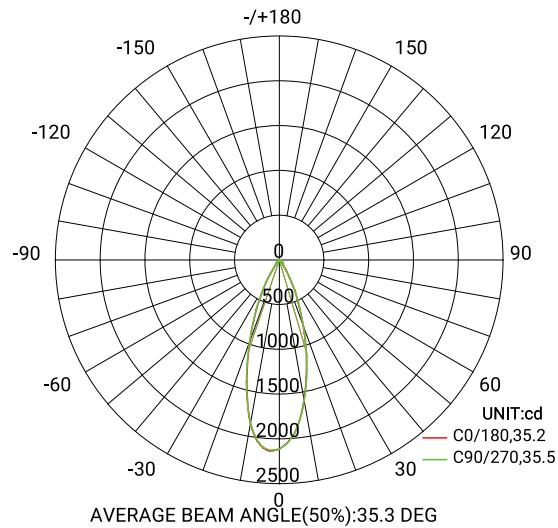


Flux out: 470.2 lm

2ft	354.5, 539.5fc	1.27ft
4ft	88.61, 134.9fc	2.541ft
6ft	39.38, 59.94fc	3.811ft
8ft	22.15, 33.72fc	5.081ft
10ft	14.18, 21.58fc	6.351ft
12ft	9.846, 14.99fc	7.622ft
14ft	7.234, 11.01fc	8.892ft
16ft	5.538, 8.429fc	10.16ft
18ft	4.376, 6.660fc	11.43ft
20ft	3.545, 5.395fc	12.71ft

Height Eavg, Emax Angle: 35.24deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics

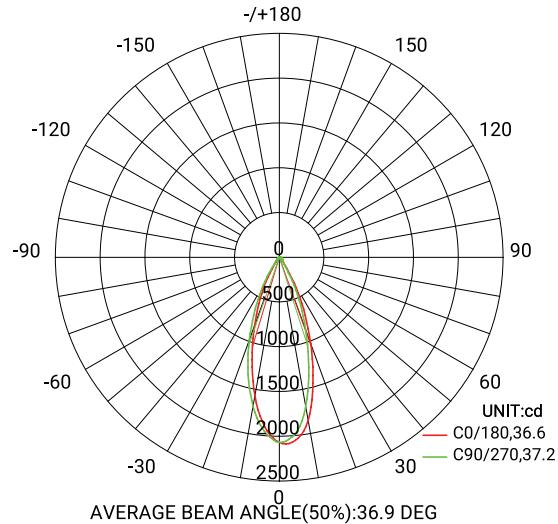

Flux out: 507.6 lm

1m	1363, 2085lx	66.12cm
2m	340.7, 521.3lx	132.23cm
3m	151.4, 231.7lx	198.35cm
4m	85.18, 130.3lx	264.47cm
5m	54.51, 83.41lx	330.58cm
6m	37.86, 57.92lx	396.70cm
7m	27.81, 42.55lx	462.82cm
8m	21.29, 32.58lx	528.93cm
9m	16.83, 25.74lx	595.05cm
10m	13.63, 20.85lx	661.17cm

Height Eavg, Emax Angle: 36.59deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.