


FEATURES:

1. High strength solderless service connector made of high-copper alloy for copper and copperweld wires
2. Type for two maximum wire sizes

N Series: Copper Split Bolt Tin Plated

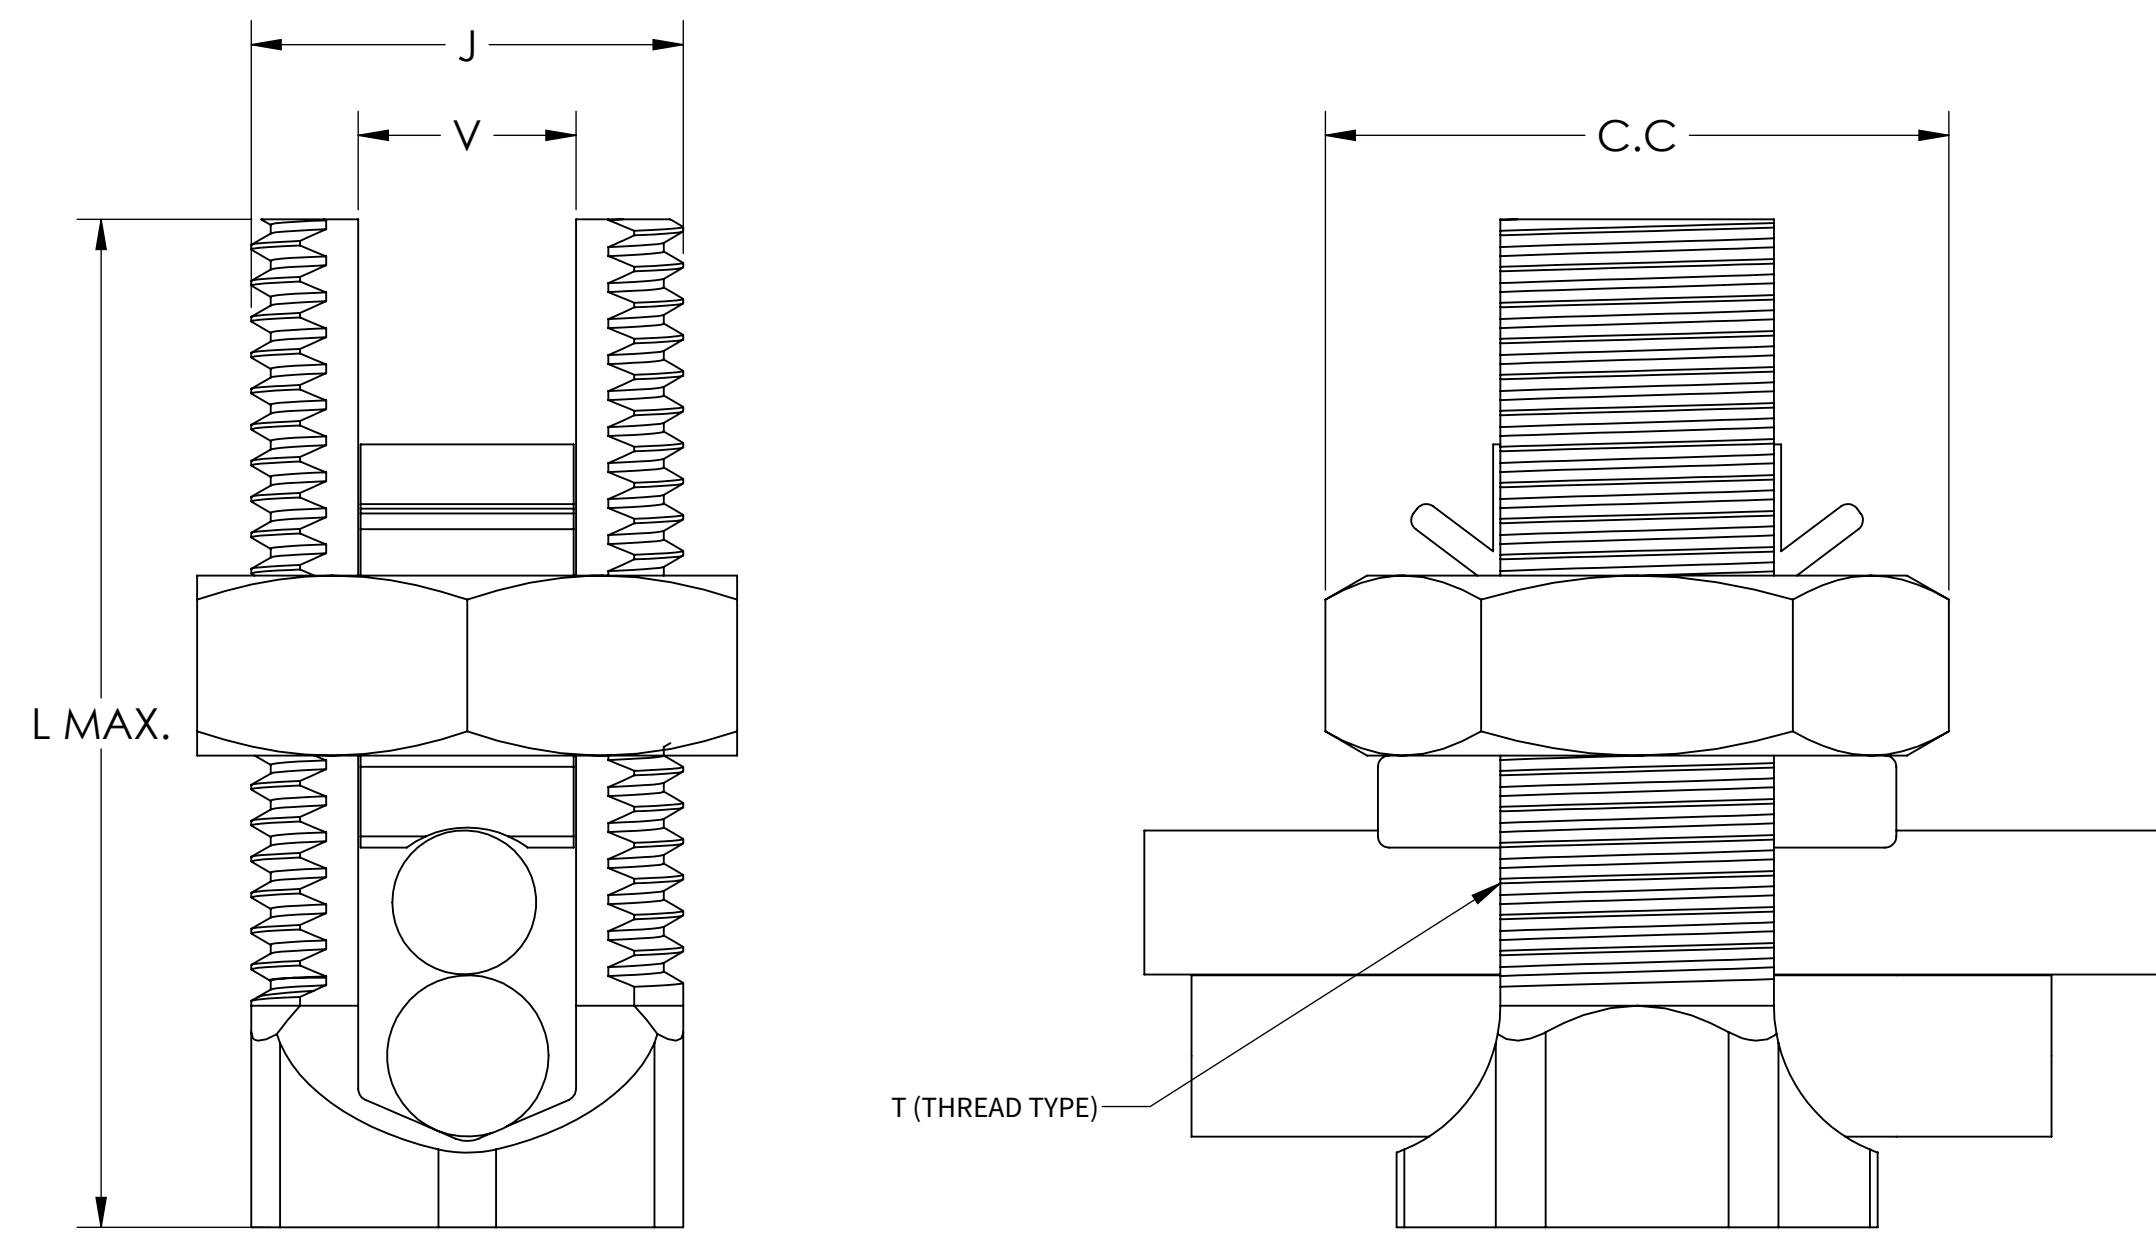

CAT NO.	J	L MAX.	V	C.C (A/F)	T (THREAD TYPE)	RANGE OF EQUAL MAIN & TAP		MAIN TAP WITH ONE MAX MAIN	MIN TAP WITH ONE MAX MAIN	QTY.
						MIN	MAX			
N-1/0R	.750	1.750	.475	0.9375	3/4-16 UNF	4 SOL	1/0 STR	14 SOL	-	1
N-2/0R	.875	1.9375	.531	1.04	7/16-20 UNF	2 SOL	2/0 STR	-	14 STR	1