

3"

47077 FIRE RATED SLIM ROUND DOWNLIGHT

PROJECT: _____

TYPE: _____

DATE: _____

NOTES: _____



2700K . 3000K . 3500K . 4000K . 5000K



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

DIMENSIONS

- Cut hole: $\phi 3 \frac{1}{4}$ ".
- Fixture: $\phi 3 \frac{3}{4}$ " x $1 \frac{1}{4}$ "H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

LIGHT MODULE

- 1 x 8W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 110 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 441 lm | 483 lm | 518 lm | 520 lm | 480 lm

CERTIFICATIONS



ORDERING GUIDE

MODEL	FINISH
47077-010	White


	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
$\phi 3 \frac{1}{4}$ "	8W	Up to 520	CCT Selectable	TRIAC/ELV	90+	110°	No

Driver Box included



PRODUCT DIMENSIONS


FINISHES



010- White



2 HOUR FIRE RATING
Tested to comply with UL 263,
ASTM E119 & CAN ULC 101

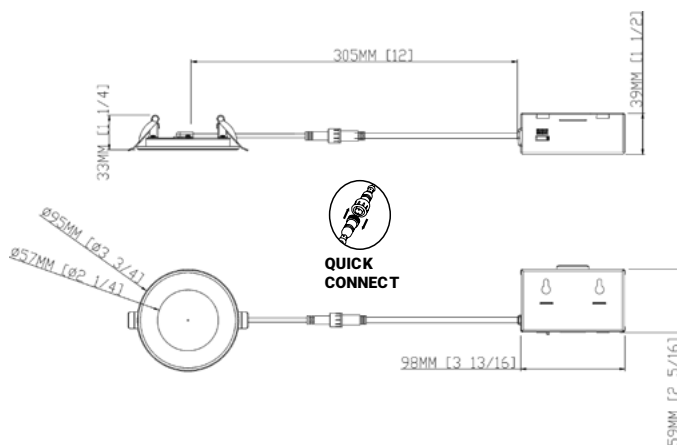

ACCESSORIES



NO IC BOX
REQUIRED



www.eurofase.com

Tel: 905.695.2055 Fax: 905.695.2056
Toll Free: 1.800.660.5391 Toll Free: 1.800.660.5390

All features, functionality and other product specifications are subject to change without notice.

PHOTOMETRICS

Imperial

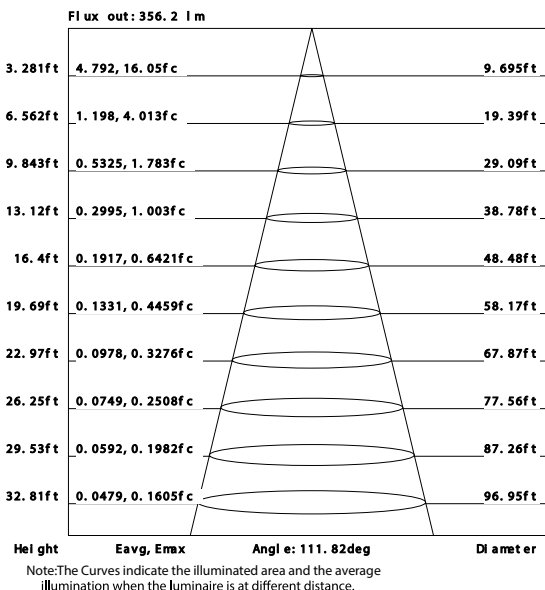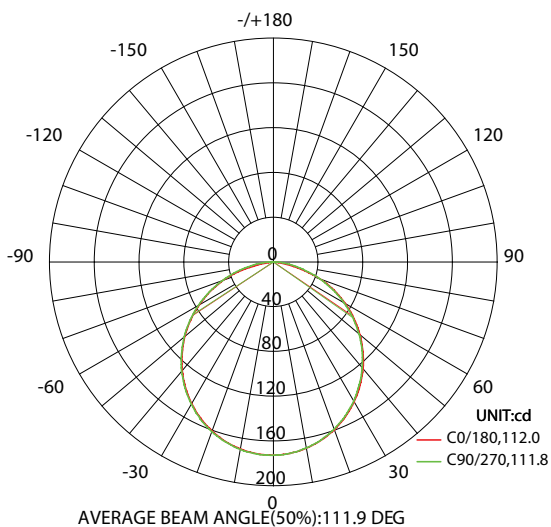

Metrics

