


# NEBO

## EDGE® 2K



The EDGE 2K is an elite everyday carry (EDC) pocket light designed for those who prioritize preparedness in any situation, featuring up to 2000 lumens, 5 light modes, and an impressive 25-hour runtime.

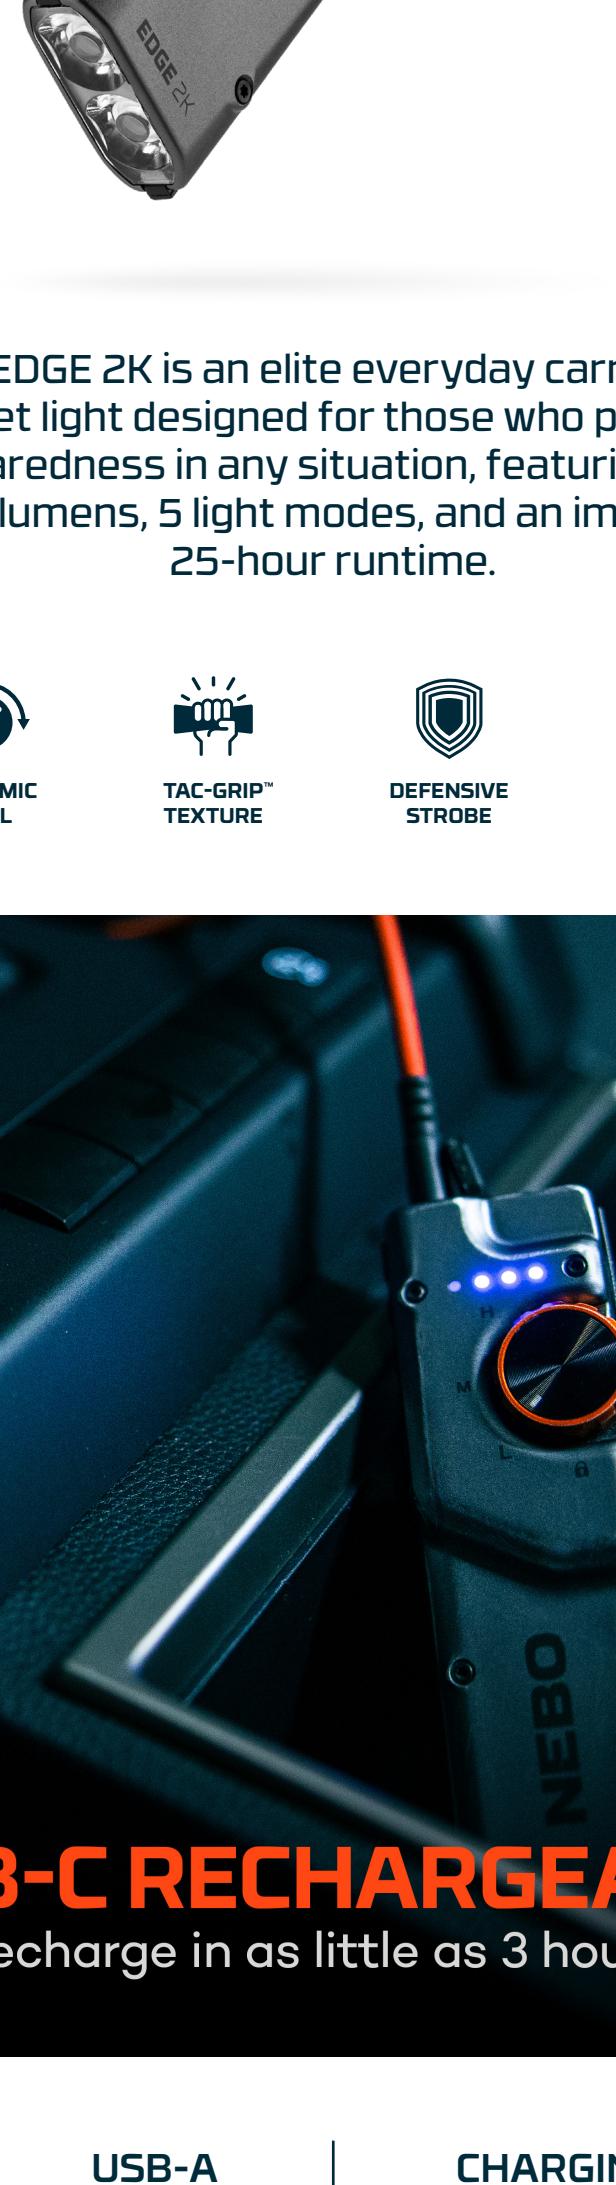

DYNAMIC DIAL



TAC-GRIP™ TEXTURE



DEFENSIVE STROBE



IPX6  
WATER RESISTANT



### CHARGING INSTRUCTIONS

Insert the USB-C end of the included charging cable into the USB-C port on the light. Next, insert the USB-A end of the charging cable into a power source with a USB-A port.

### CHARGING INDICATOR

The 4 blue LED lights near the mode selection dial serve as the charging status indicator while the light is plugged in.

- ● ● ● Flashing Blue: Battery is charging
- ● ● ● Solid Blue: Battery is charged

### POWER INDICATOR

The 4 blue LED lights near the mode selection dial serve as the battery power indicator while the light is in use.

- 1 Blue LED: 0-25% Battery
- 2 Blue LEDs: 50% Battery
- 3 Blue LEDs: 75% Battery
- 4 Blue LEDs: 100% Battery



If you experience a problem, please do not return to your local store. Contact our Customer Service team at 800-255-6061 or [NEBOLIGHTS.COM](http://NEBOLIGHTS.COM). For warranty information or to register your product, visit [OURWEBSITE.COM](http://OURWEBSITE.COM).

### OPERATION

Press the power button to turn on and off the light.

Turn the dial to select light modes:

LOCKOUT > (L) LOW > (M) MEDIUM > (H) HIGH

#### LOCKOUT MODE

Turn the dial to to enable LOCKOUT mode. This prevents the light from turning on any light modes, including TURBO and DEFENSIVE STROBE.

#### TURBO MODE

Press and hold the power button from any light mode to activate TURBO.

**NOTE:** To prevent the light from overheating, TURBO can only be activated once every 3 minutes.

#### DEFENSIVE STROBE

Double-press the power button from any active or inactive light mode to initiate the DEFENSIVE STROBE.

#### DIRECT-TO-LOW

With the light off and the dial set to High or Medium, pressing and holding the power button for approximately 3 seconds will activate the LOW mode. With Direct-to-Low, simply rotating the dial will enable normal operation of the light.

MODES	OUTPUT (Lumens)	RUN TIME (Hours)	BEAM DISTANCE (Meters/Yards)
TURBO	2000	30s	144 / 157
HIGH	1000	2	106 / 115
MEDIUM	250	5	57 / 62
LOW	25	25	17 / 18
STROBE	-	-	-/-

