



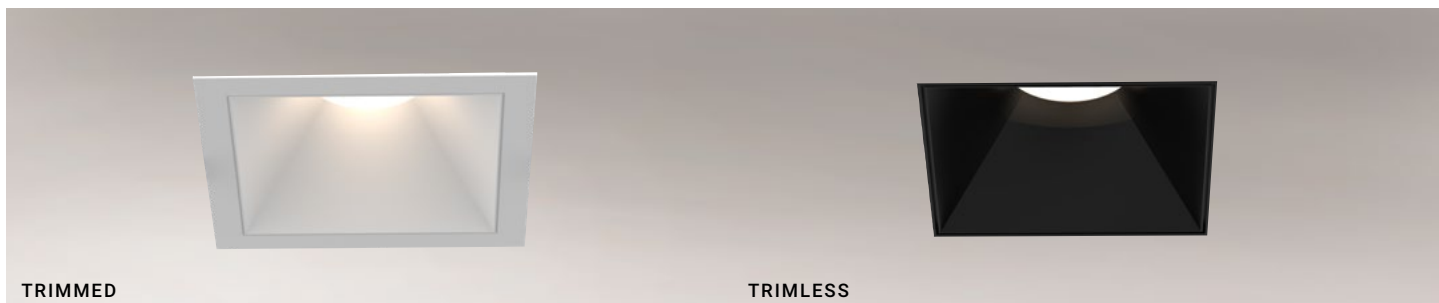

### FEATURES

With their smooth, flat and edgeless design, Oscar family recessed luminaires become a seamless part of ceiling decor. With 3 different light modules suited for ambient and accent lighting, the Oscar family is as highly functional as it is visually appealing. Numerous ordering options allow for further functional and artistic customization. Oscar recessed luminaires are available in larger sizes with higher lumen packages making them ideal for both residential and commercial settings.

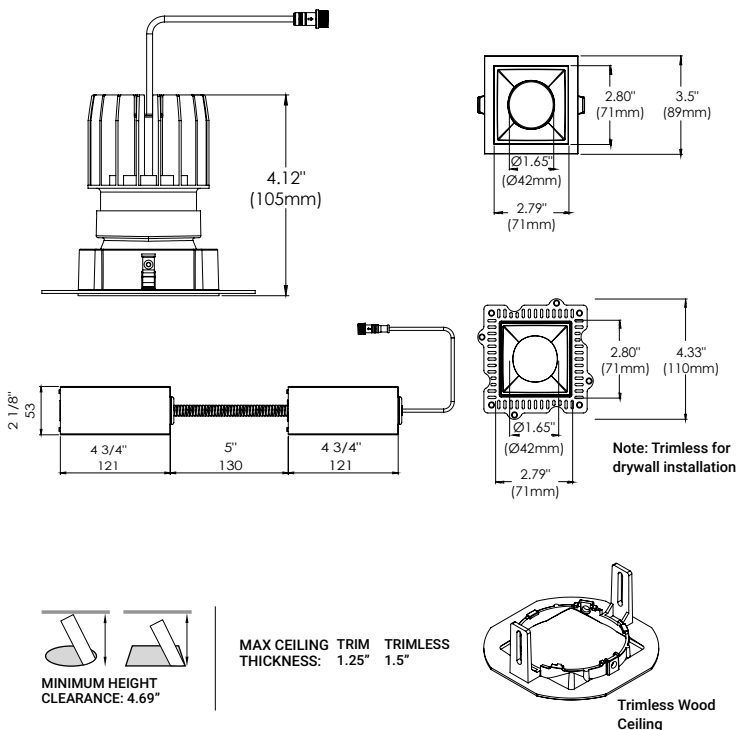

### SPECIFICATIONS

|                     |                                                                                                                                                                                       |                                                       |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| FIXTURE BODY        | 18 gauge powder coated steel body. Aluminum powder coated trim or trimless mesh plate                                                                                                 |                                                       |
| INSTALLATON TYPE    | Remodel/existing ceiling<br>N/C plate, IC Box on page 2                                                                                                                               |                                                       |
| CUT HOLE            | Trim: 3 1/4" x 3 1/4"<br>Trimless: 3" x 3"                                                                                                                                            | Trimless Wood Ceiling<br>Please contact us for detail |
| COLOR FINISH        | Black/White/Custom                                                                                                                                                                    |                                                       |
| LIGHT MODULE        | High output, high efficiency LED COB.<br>Lumen Maintenance: 70% @50,000 hrs                                                                                                           |                                                       |
| INPUT VOLTAGE       | 120V - 277V                                                                                                                                                                           |                                                       |
| WATTAGE             | 10W IC Rated, 15W Non-IC Rated                                                                                                                                                        |                                                       |
| POWER SUPPLY        | ERP 10W or 15W, Constant Current 250mA or 350mA power supply<br>Minimum operating temperature: -30°<br>Enclosed in a Junction box with 12" flexible cable to mate to module connector |                                                       |
| CRI                 | 90+                                                                                                                                                                                   |                                                       |
| DIMMING             | TRIAC/ELV/0-10V                                                                                                                                                                       |                                                       |
| DELIVERED LUMENS    | 10W IC: 810 LM, 10H IC: 1060 LM, 15W Non-IC: 1430 LM, Dim to Warm: 15W, 785 LM                                                                                                        |                                                       |
| CCT OPTIONS         | 2700K/3000K/3500K/4000K, DTW (Dim to warm)                                                                                                                                            |                                                       |
| REFLECTORS          | (N) Narrow 15°/(M) Medium 24°/(W) Wide 38°/(F) Wide Flood 50°                                                                                                                         |                                                       |
| DIFFUSERS           | (CL) Clear/(LN) Linear Spread/(HC) Honeycomb (FR) Frosted/(SP) Solite                                                                                                                 |                                                       |
| APPROVAL            | Wet                                                                                                                                                                                   |                                                       |
| ELECTRICAL APPROVAL |  Compliant                                                                                       |                                                       |
| WARRANTY            |                                                                                                  |                                                       |

### SPECIFICATION GUIDE

| OSCAR | 3 | SHAPE |        | TRIM/<br>TRIMLESS |                          | FINISHES |       | LIGHT MODULE |                | BAFFLE FINISHES |             | WATTAGE |                   | CCT                                      | BEAM<br>ANGLE |     | DIFFUSER |                  | ADD-ONS                                                        |                              |
|-------|---|-------|--------|-------------------|--------------------------|----------|-------|--------------|----------------|-----------------|-------------|---------|-------------------|------------------------------------------|---------------|-----|----------|------------------|----------------------------------------------------------------|------------------------------|
| OSC   | 3 | S     | SQUARE | T                 | TRIM                     | 01       | BLACK | RF           | RECESSED FIXED | 01              | MATTE BLACK | 10      | 10W               | 27                                       | N             | 15° | CL       | CLEAR            | EM                                                             | EMERGENCY<br>MICRO INVERTER* |
|       |   |       |        | TL                | TRIMLESS                 | 02       | WHITE |              |                | 02              | MATTE WHITE | 10 H    | High Lumen<br>10W | 30                                       | M             | 24° | LN       | LINEAR<br>SPREAD |                                                                |                              |
|       |   |       |        | WC                | TRIMLESS<br>WOOD CEILING |          |       |              |                | 03              | GOLD        | 15      | 15W               | 35                                       | W             | 38° | HC       | HONEYCOMB        |                                                                |                              |
|       |   |       |        |                   |                          |          |       |              |                | 04              | CHROME      |         |                   | 40                                       | F             | 50° | FR       | FROSTED          | * Part# 47184-015<br>Sold Seperate, see<br>page 2 for details. |                              |
|       |   |       |        |                   |                          |          |       |              |                | 05              | DARK CHROME |         |                   | DTW<br><br>Dim To<br>Warm<br>15W<br>only |               |     | SP       | SOLITE           |                                                                |                              |
|       |   |       |        |                   |                          |          |       |              |                | 06              | HAZE        |         |                   |                                          |               |     |          |                  |                                                                |                              |

ORDERING GUIDE EXAMPLE:

Oscar / 3 / Square / Trim / White / Recessed Fixed / Chrome / 15W / 2700K / 15° Beam Angle / Clear Diffuser

CODE: OSC-3-S-T-02-RF-04-15-27-N-CL


#### ORDERING GUIDE EXAMPLE:

Oscar / 3 / Square / Trim / White / Recessed Fixed / Chrome / 15W / 2700K / 15° Beam Angle / Clear Diffuser

CODE: OSC-3-S-T-02-RF-04-15-27-N-CL

\* Part# 47184-015 Sold Seperate, see page 2 for details.

### REFLECTOR OPTIONS

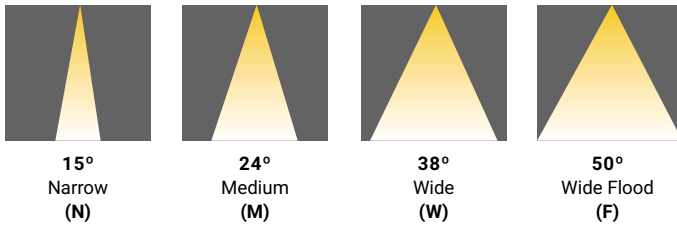

### BAFFLE FINISHES



### DIFFUSER OPTIONS



### ADD-ONS



SINUSOIDAL EMERGENCY MICRO INVERTER

- Remote Mounted
- 150W Max 0-10V
- 25W Max Triac/elv.
- Can accommodate multiple fixtures :
- Recommended to load to 80%
- 90 Min Service
- See Spc Sheet for more details

### NEW CONSTRUCTION PLATES + IC BOXES



#### NEW CONSTRUCTION PLATE

##### TRIM


30535-015

##### TRIMLESS

30536-012

##### CUT HOLE:

Trim: 3 1/4" x 3 1/4"  
Trimless: 3" x 3"

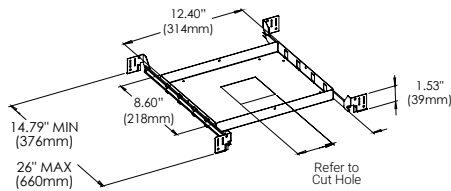

#### TRIM

AT/IC Box: 46747-013

##### CUT HOLE:


Trim: 3 1/4" x 3 1/4"  
Trimless: 3" x 3"

##### TRIMLESS

AT/IC Box: 46740-014


##### CUT HOLE:


Trim: 3 1/4" x 3 1/4"  
Trimless: 3" x 3"

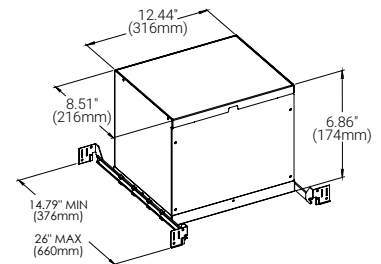


### DRIVERS

- Compatible with TRIAC (forward-phase or leading-edge) ELV (reverse-phase or trailing edge) and 0-10V dimmers.
- ESSxxxW models: TRIAC and ELV dimming only at 120 Vac
- ESSxxxW models: ELV dimming only at 230 Vac
- 90° C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70° case hot spot temperature (some models have a higher lifetime)
- IP64-rated (IP66 for ESST) case with silicone-based potting
- Protections: Output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery.
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac.
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals

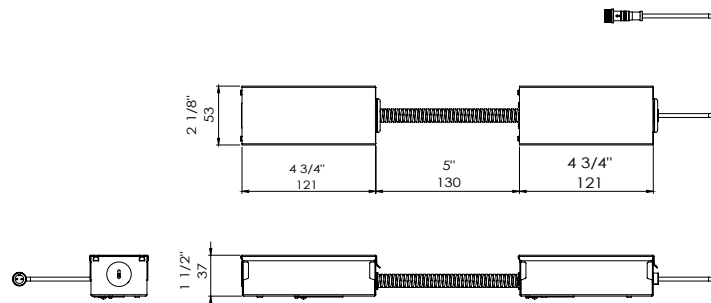


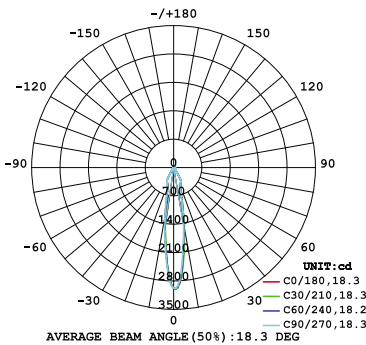


10W 1-LIGHT Square DOWNLIGHT NARROW CLEAR

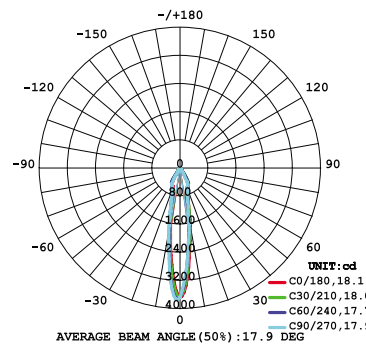


15W 1-LIGHT Square DOWNLIGHT NARROW CLEAR

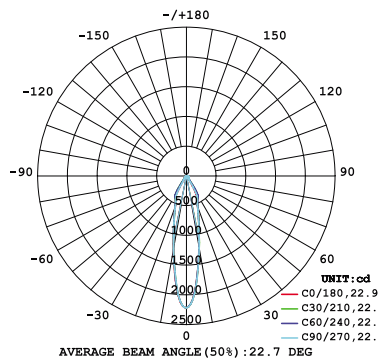


10W 1-LIGHT Square DOWNLIGHT MEDIUM CLEAR

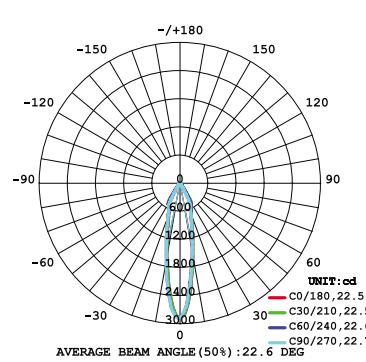


15W 1-LIGHT Square DOWNLIGHT MEDIUM CLEAR

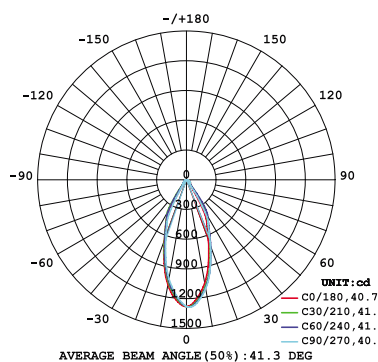


10W 1-LIGHT Square DOWNLIGHT WIDE CLEAR

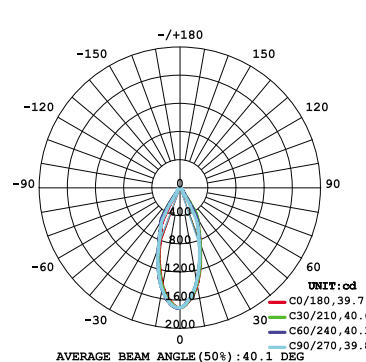


15W 1-LIGHT Square DOWNLIGHT WIDE CLEAR

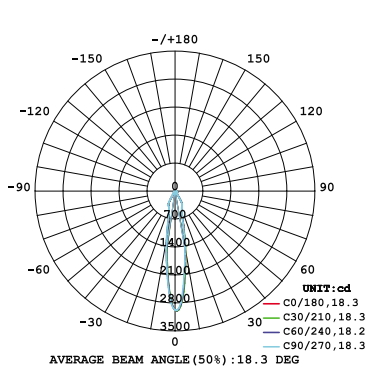


10W 1-LIGHT Square DOWNLIGHT NARROW CLEAR

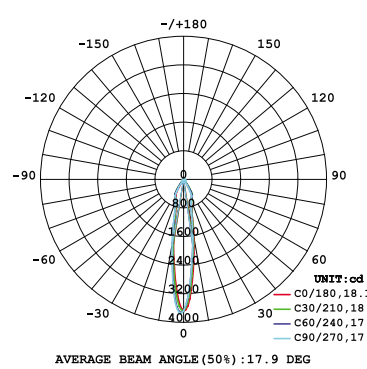


15W 1-LIGHT Square DOWNLIGHT NARROW CLEAR

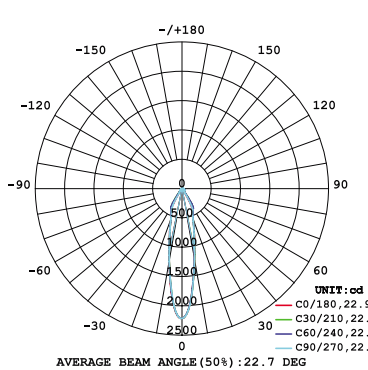


10W 1-LIGHT Square DOWNLIGHT MEDIUM CLEAR

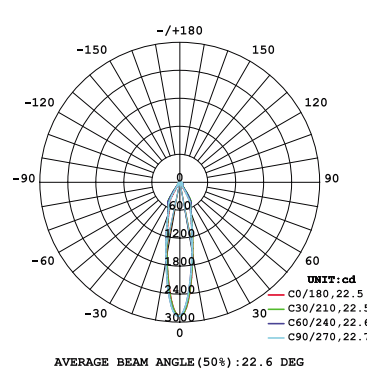

15W 1-LIGHT Square DOWNLIGHT MEDIUM CLEAR

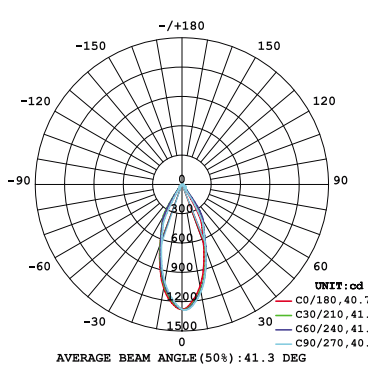

10W 1-LIGHT Square DOWNLIGHT WIDE CLEAR

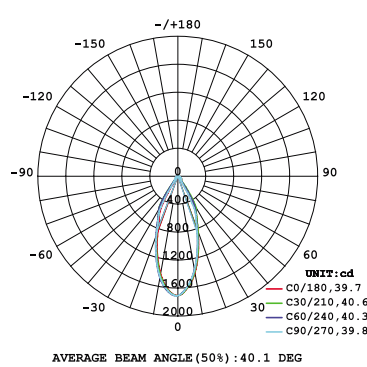

15W 1-LIGHT Square DOWNLIGHT WIDE CLEAR