HOME MULTIROOM

SKU: 650144 **MSRP:** $839.99



- BOOSTS SIGNAL ON ALL AVAILABLE NETWORK SPEEDS
- UP TO 5,000 sq. ft. COVERAGE
- UP TO +65 dB GAIN
- MULTI-USER WIRELESS BOOSTER

FEATURES

- Stylish, MultiRoom-exclusive Inside Antenna.
- Powerful, precision-mount Outside Antenna.
- Enhances cell coverage for up to 3 large rooms.
- Tool-free installation. No need to drill holes.

ABOUT

The weBoost **Home MultiRoom** cell signal booster boosts networks speeds across all available signal bands (including Band 25 for enhanced Sprint support) for up to three large rooms.

The Home MultiRoom also features an exclusive, Inside Antenna—featuring a built-in kickstand and stylish fabric cover while also providing best-in-class performance. Wall-mount installation is effortless with the included 3M® Command™ strips. The proprietary Outside Antenna offers a tool-free, finger-tightened precision mount. Users will experience faster data speeds, better voice quality, fewer dropped calls, and superior streaming capability. Home MultiRoom works with all Canadian carriers.

It also comes with 2-year manufacturer's warranty, and 30-day money-back guarantee.

KIT INCLUDES


Home MultiRoom


Outside Directional Antenna (314445)


Fabric Inside Panel Antenna (314440)


Power Supply (850018)


15' (x2) & 30' Cables (YX030-15W), (950630)

Flat Window Cable (951177)


Outside Antenna Mounting Bracket


Wall Mount Brackets w/Command Strips


Cable Mounting Clips (x15)


COVERAGE AREA

IF YOUR OUTSIDE SIGNAL IS	YOUR BOOSTED SIGNAL MAY BE
●●●●● -89 AND LOWER About 5 bars	UP TO 5,000 sq. ft.
●●●●○ -90 dB About 3 to 4 bars	UP TO 3,500 sq. ft.
●●○○○ -100 dB About 1 to 2 bars	UP TO 1,000 sq. ft.
○○○○○ No existing	A signal booster likely will not work

SPECIFICATIONS

MODEL NUMBER	460059	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	65 dB	
IMPEDANCE	75 Ohm	
POWER	110-240 V AC, 50-60 Hz, 8 W	
CONNECTORS	F-Female	
BOOSTER DIMENSIONS	6 x 6 x 1.6 in.	
BOOSTER WEIGHT	1.9 lbs.	

HOW IT WORKS

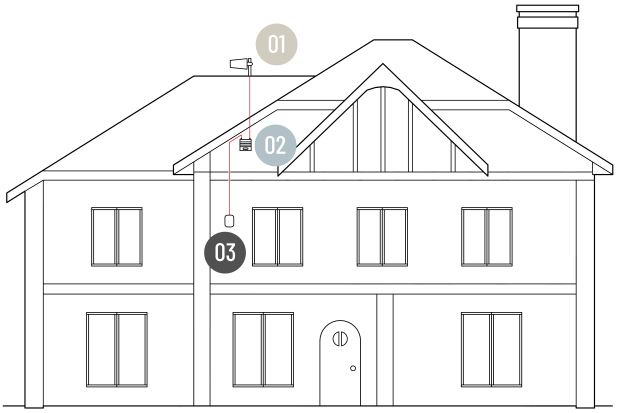

01 **Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.

02 **Booster:** The booster amplifies any cell signals it receives from the outside antenna.

03 **Inside antenna:** The inside antenna broadcasts these signals.

AVAILABLE ACCESSORIES



Plastic Inside Panel Antenna 314444



Lightning Surge Protector 75 Ohm 859992



-3dB 2-Way Splitter 75 Ohm 850034



20 ft. White RG6 Low Loss Coax 950620



F-Female to F-Female Barrel Connector 971129

PACKAGE DIMENSIONS

9.313 L x 14 W x 11.375 H

14 in. x 11.375 in.	9.313 in. x 11.375 in.	14 in. x 9.313 in.	10.2 lbs.
FRONT	SIDE	TOP/BOTTOM	WEIGHT

MASTER CARTON: 25.5 L x 19.5 W x 15.5 H | 43.8 lbs. | QTY 4

FOR PARTNER'S USE

650144_HomeMultiRoom_CA_SS_081126

SUPPORT

2-Year Warranty from Purchase.

Website: www.weboost.ca/support

Phone: +1 866 294 1660
Monday to Friday

Innovation, Science and Economic Development Canada

PROUDLY DESIGNED AND BUILT IN ST. GEORGE, UTAH U.S.A

UPC

650144

8 10005 96035 9