

# Home MultiRoom

SKU: 650144 MSRP: \$839.99

## FEATURES

- Stylish, MultiRoom-exclusive Inside Antenna.
- Powerful, precision-mount Outside Antenna.
- Enhances cell coverage for up to 3 large rooms.
- Tool-free installation. No need to drill holes.



- BOOSTS SIGNAL ON ALL AVAILABLE NETWORK SPEEDS
- UP TO 5,000 sq. ft. COVERAGE
- UP TO +65 dB GAIN
- MULTI-USER WIRELESS BOOSTER

## About

The weBoost **Home MultiRoom** cell signal booster boosts networks speeds across all available signal bands (including Band 25 for enhanced Sprint support) for up to three large rooms.

The Home MultiRoom also features an exclusive, Inside Antenna—featuring a built-in kickstand and stylish fabric cover while also providing best-in-class performance. Wall-mount installation is effortless with the included 3M® Command™ strips. The proprietary Outside Antenna offers a tool-free, finger-tightened precision mount. Users will experience faster data speeds, better voice quality, fewer dropped calls, and superior streaming capability. Home MultiRoom works with all Canadian carriers.

It also comes with 2-year manufacturer’s warranty, and 30-day money-back guarantee.

## Kit Includes




## Coverage Area

IF YOUR OUTSIDE SIGNAL IS	YOUR BOOSTED SIGNAL MAY BE
●●●●● -89 AND LOWER About 5 bars	UP TO 5,000 sq. ft.
●●●●○ -90 dB About 3 to 4 bars	UP TO 3,500 sq. ft.
●●○○○ -100 dB About 1 to 2 bars	UP TO 1,000 sq. ft.
○○○○○ No existing	A signal booster likely will not work

## Specifications

MODEL NUMBER	650144
FREQUENCIES	Band 12/17 700 MHz Band 13 700 MHz Band 5 850 MHz Band 4 1700/2100 MHz Band 25/2 1900 MHz
MAX GAIN	65 dB
IMPEDANCE	75 Ohm
POWER	110-240 V AC, 50-60 Hz, 8 W
CONNECTORS	F-Female
BOOSTER DIMENSIONS	6 x 6 x 1.6 in.
BOOSTER WEIGHT	1.9 lbs.

## Installation

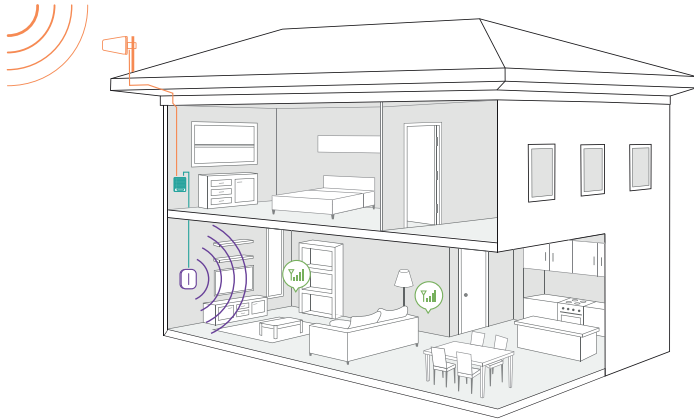

- 1 Receives signal:** The outside antenna reaches out to access the existing strong outdoor cell signal and delivers it into the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

## Available Accessories



Plastic Inside Panel Antenna  
314444




Lightning Surge Protector 75 Ohm  
859992



-3dB 2-Way Splitter 75 Ohm  
850034



20 ft. White RG6 Low Loss Coax  
950620




F-Female to F-Female Barrel Connector  
971129

## Package Dimensions


9.313 L x 14 W x 11.375 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 25.5 L x 19.5 W x 15.5 H | 43.8 lbs. | QTY 4

## Support



2-Year Warranty from Purchase.

Website: [www.weboost.ca/support](http://www.weboost.ca/support)

Phone: +1 866 294 1660

Monday to Friday



Innovation, Science and Economic Development Canada



PROUDLY DESIGNED AND BUILT  
IN ST. GEORGE, UTAH  
U.S.A

## UPC

650144



8 10005 96035 9

FOR PARTNER'S USE