




# 555

## Metalized BOPP Film Tape

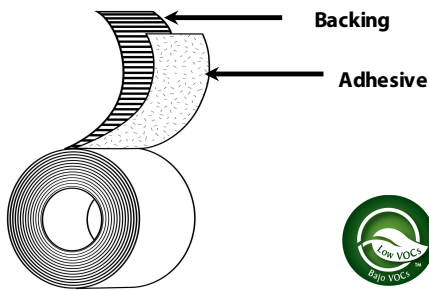

<b>Backing:</b>	Metalized BOPP Film
<b>Adhesive:</b>	Acrylic
<b>Liner:</b>	N/A
<b>Colors:</b>	Metallic
<b>Specifications:</b>	N/A
<b>Standard Sizes:</b>	48mm x 110M, 72mm x 110M

### Applications

- Sealing reflective and bubble insulation
- Labeling, marking, and splicing applications

### Features

- OPP Backing
- Acrylic Adhesive
- Low VOC Content

### Benefits

- Tough and durable
- Hand tearable for ease of use
- Solvent-free, low odor
- Aggressive, high tack bond
- Mold and moisture resistant
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	3.1 mils	0.079 mm	ASTM D-1000
<b>Adhesion to Steel</b>	45 oz/in	4.92 N/cm	PSTC-101
<b>Adhesion to Backing</b>	35 oz/in	3.83 N/cm	PSTC-101
<b>Tensile Strength</b>	34 lb/in	59.54 N/cm	ASTM D-1000
<b>Operating Temperature</b>	-40 to 212 °F	-40 to 100 °C	
<b>VOC Content</b>	0 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.