




## Delta View - Dual Unit Assembly Instructions



Warranty: [raproducts.com/resources/warranty](https://raproducts.com/resources/warranty)

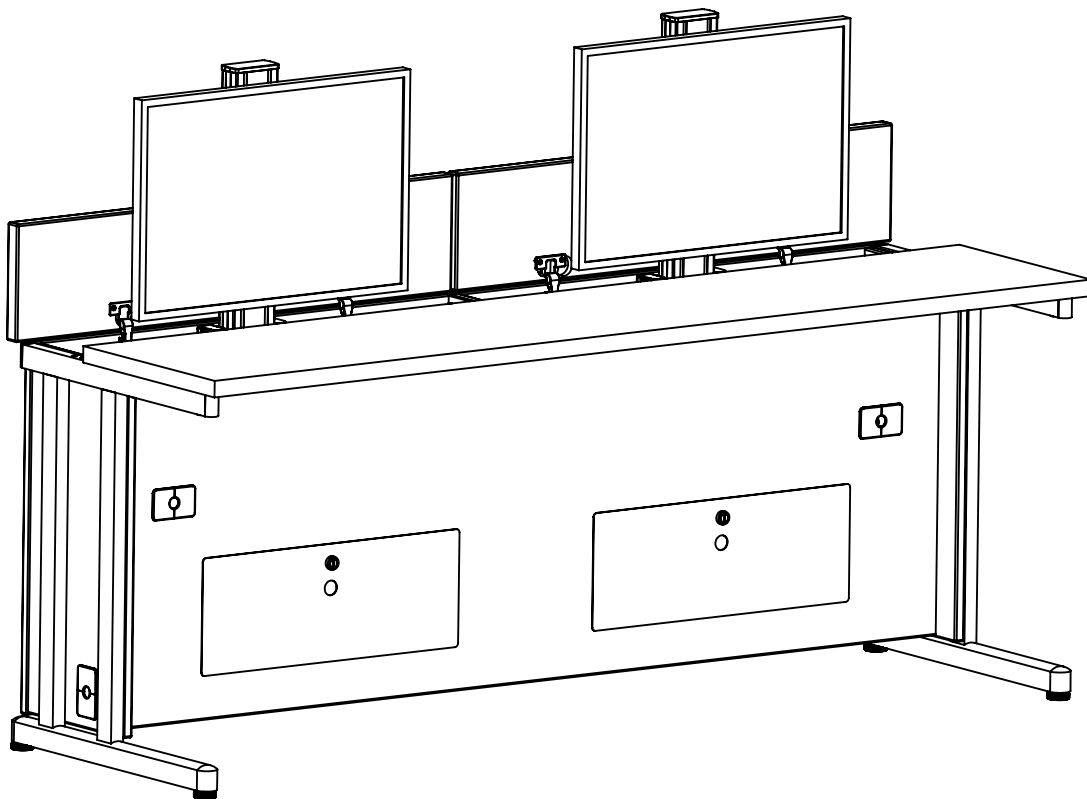

## READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT.

USE THIS PRODUCT ONLY AS INSTRUCTED.  
FAILURE TO COMPLY WITH ALL INSTRUCTIONS AND WARNINGS  
MAY RESULT IN SERIOUS PROPERTY DAMAGE OR BODILY INJURY.

### Basic Safety Instructions

1. **Intended Use.** This Product is exclusively designed for use as indoor office furniture in compliance with all instructions and safety warnings in the user manual. Any different use, or use extending beyond the intended use, may result in property damage or bodily injury and is prohibited. This Product should not be used, operated or maintained with additional components not authorized by K&A Manufacturing, Inc.

**BY USING THIS PRODUCT OR ANY FEATURE OF THIS PRODUCT, YOU AGREE TO COMPLY WITH ALL PRODUCT TERMS AND POLICIES, INCLUDING WITHOUT LIMITATION ANY SAFETY WARNINGS AND INSTRUCTIONS, PROVIDED BY K&A MANUFACTURING, INC. AND ITS AFFILIATES. K&A MANUFACTURING, INC. SHALL ASSUME NO LIABILITY FOR ANY DAMAGE OR INJURY CAUSED BY USE OF THE PRODUCT A) IN VIOLATION OF ANY SAFETY WARNINGS OR INSTRUCTIONS; B) NOT AUTHORIZED BY K&A MANUFACTURING, INC.; OR C) BY EVENTS BEYOND K&A MANUFACTURING, INC.'S CONTROL.**



**DO NOT SIT, STAND OR CRAWL ON OR UNDER THE PRODUCT.  
MAKE SURE NO OBSTACLES ARE IN THE PRODUCT'S PATH.  
MAKE SURE ALL CORDS ARE LONG ENOUGH TO ACCOMMODATE ANY CHANGE IN HEIGHT.  
DO NOT USE ATTACHMENTS NOT RECOMMENDED BY THE MANUFACTURER.**

2. **Electrical Height Adjustment.** The height of this Product may be adjusted electronically. Contact with electrical voltage may cause serious injury and death. Only use the Product in compliance with these instructions. This Product should not be used in environments with high levels of humidity or moisture



**KEEP CORDS AND ELECTRICAL COMPONENTS AWAY FROM HEAT AND LIQUIDS.  
DO NOT OPEN ANY OF THE COMPONENTS: CONTROL BOX OR KEYPAD.  
DO NOT USE WITH A DAMAGED PLUG OR CORD.  
DO NOT INSERT ANYTHING INTO ANY SEAM OR OPENING.**

3. **Setup and Use.** This Product should only be used and operated in good condition. When in use, no one should sit, stand or crawl on or under the Product. There is a danger of crushing, shearing, injury or damage. Keep the entire range of motion of the Product clear of all obstacles. Devices and object on the Product can tip over, fall or be crushed by the Product.



**KEEP HANDS AND FINGERS CLEAR.  
KEEP ALL OBSTACLES CLEAR OF THE PRODUCT'S PATH.**


4. **Users.** This Product is not intended for use with children, individuals with restricted physical, sensory or mental capabilities, or individuals who lack experience or knowledge, unless they are supervised by a person who is responsible for their safety or they have received instructions from a person who is responsible for their safety concerning how the Product must be used. Children should be closely supervised to ensure that they do not play with the Product and its height adjustment mechanism to avoid risk of physical injury or electric shock.



**KEEP CHILDREN AWAY FROM THE PRODUCT, ITS CONTROL UNITS, AND KEYPADS.**


## Tools Required for Assembly

- A. Power Driver with Adjustable Torque
- B. #2 Phillips Head Driver Bit
- C. #2 Square Head Drive Bit (Recommended)
- D. Phillips Screwdriver

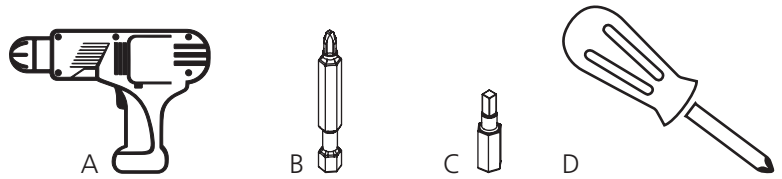


## Hardware Included for Assembly *(may have extra)*

- E. 5/8" Washer Head Wood Screw x32
- F. Cam Bolt x24
- G. M6 x 30mm Machine Screw x6
- H. Gas Strut Bracket Screw x10
- I. Hinge Screw x16
- J. M6 x 50mm Machine Screw x4
- K. Clear Bumper x3
- L. M4 x 10mm Machine Screw x8

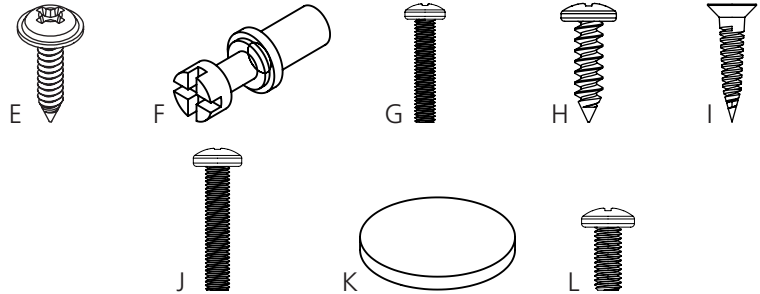



## Parts

- M. Hinge Mounting Bracket x4
- N. Hinge x4
- O. Gas Strut Back Panel Bracket x2
- P. Gas Strut Door Bracket x2
- Q. Gas Strut x2
- R. Keyboard Nest x2
- S. Mouse Nest x2
- T. Wire Management x2
- U. Grommet x4
- V. Access Panel (Locking or Non-Locking) x2
- W. Right Leg x1
- X. Left Leg x1
- Y. Column Assembly x2
- Z. Monitor Bracket x2

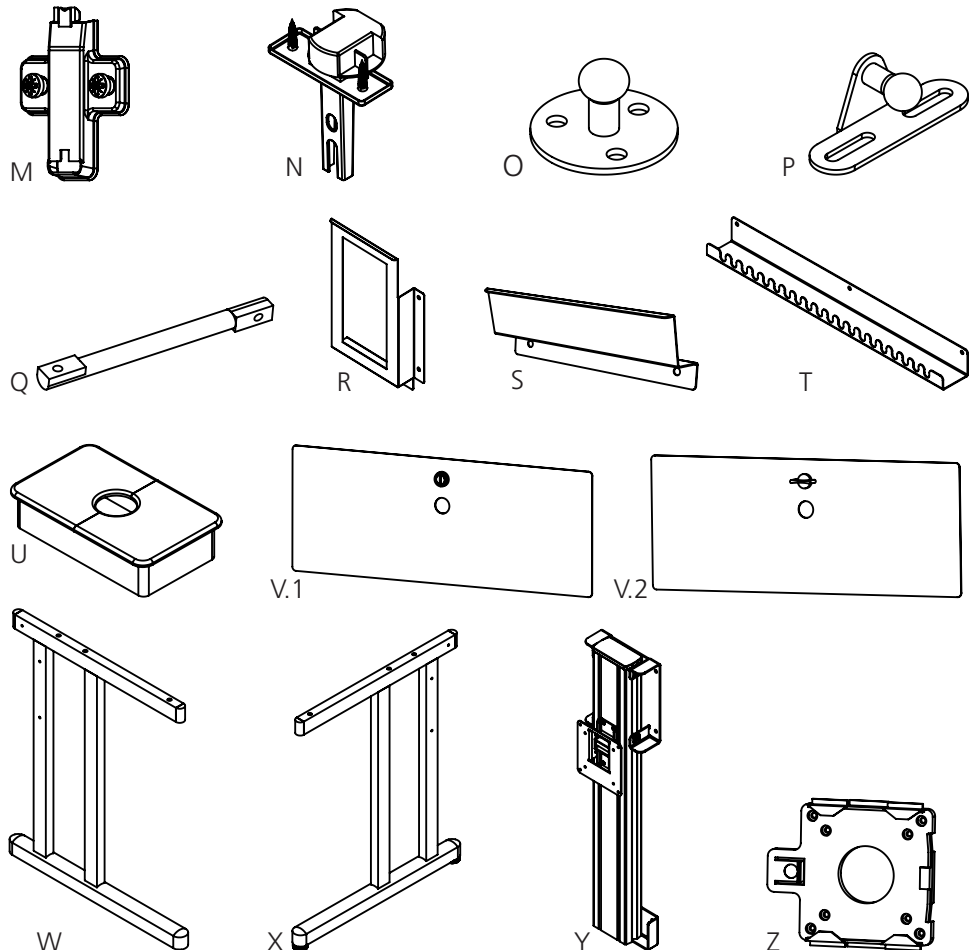



## Step 1 (Assembly A & B)

- Lay the left leg (X) on a flat surface with the side with the holes facing up.
- Place the left side panel on top of the left leg with the cams facing up.
- Align the side panel with the pre drilled holes. Then screw (G) the side panel into the assembly leg.
- Insert the Slim Fix Bolts (F) into the pre drilled holes.
- This will be "Assembly A"
- Set this off to the side and repeat the steps for the right leg and side panel.
- This will be "Assembly B"

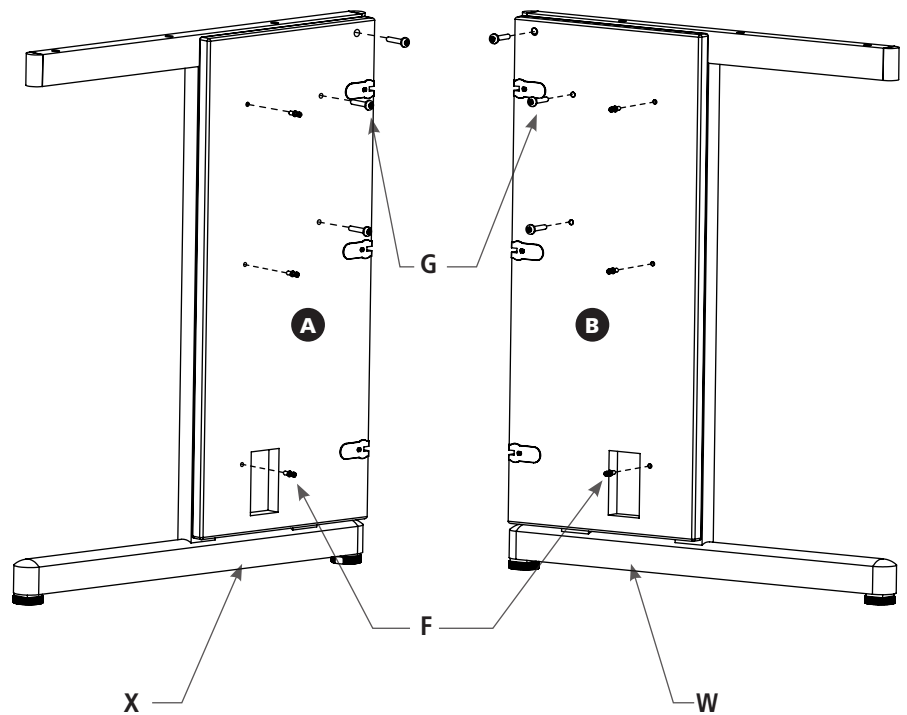



## Step 2

- Lay the back panel on a flat surface.
- Align the bottom holes on the column assemblies with the pre drilled holes and attach with washer head wood screws (E). Keep the screws loose.
- Slide the top bracket on the column assembly up or down till the holes are aligned with the pre drilled holes. Screw the bracket down tight with washer head wood screws (E).
- Tighten the bottom screws on the column assembly.
- Align the bottom ball gas strut with the pre drilled holes and use the screws provided in the package (H).

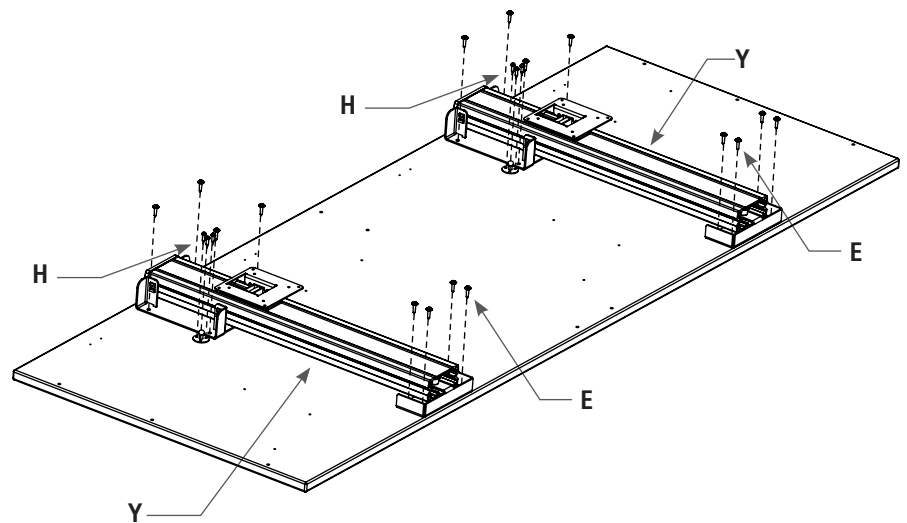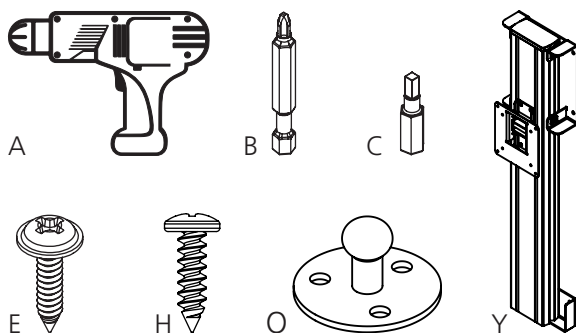



## Step 3

- Align the keyboard nests (R) with the pre-drilled holes and attach it with the washer head wood screws (E).
- Align the mouse nests (S) with the pre-drilled holes and attach it with the washer head wood screws (E).

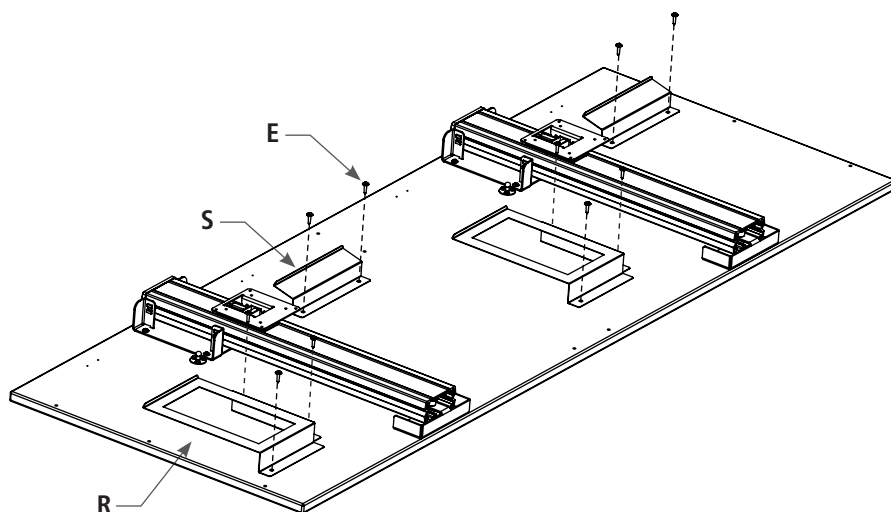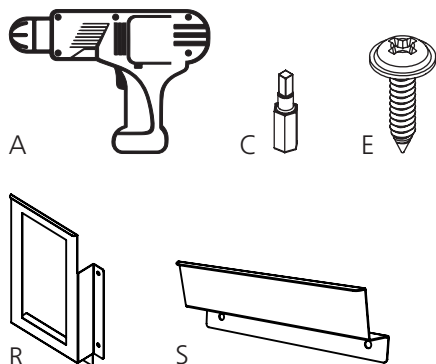


## Step 4

- Align the bottom part of the hinge (M) with the pre-drilled holes and attach with the screws provided in the package (I). **(Do not tighten)**
- Snap the rod end of the gas strut (Q) to the ball of the gas strut mounting bracket (O).

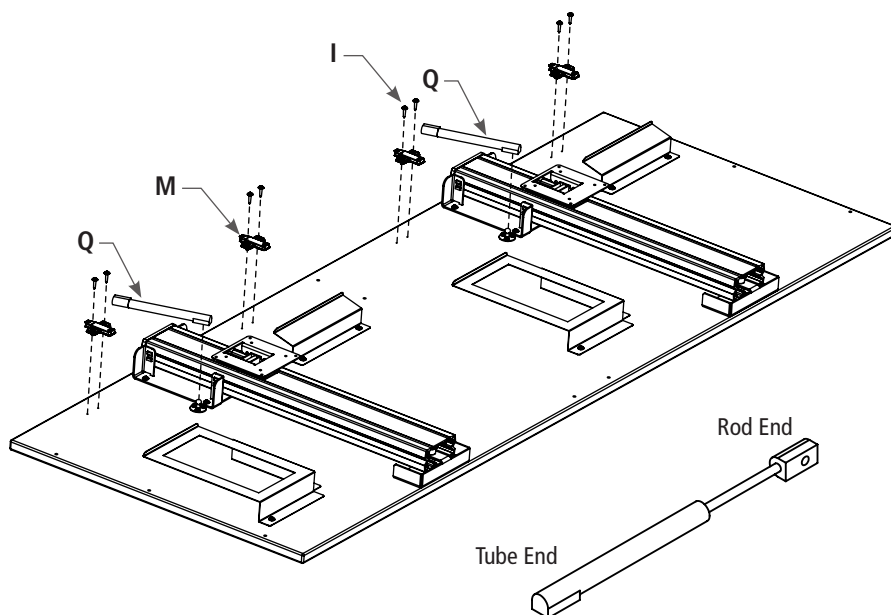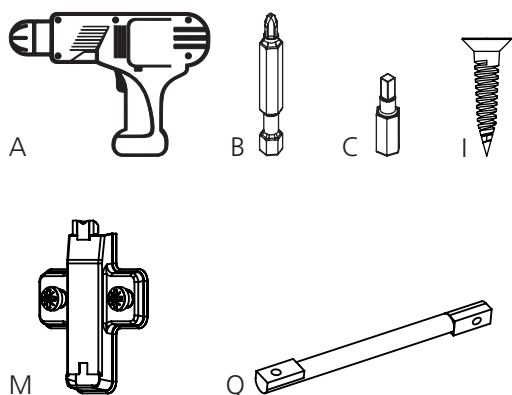

## Step 5 (Assembly C)


- Insert the Slim Fix Bolts (F) into the pre-drilled holes.
- Then set the assembly off to the side.
- This will be "Assembly C"




A



B




F

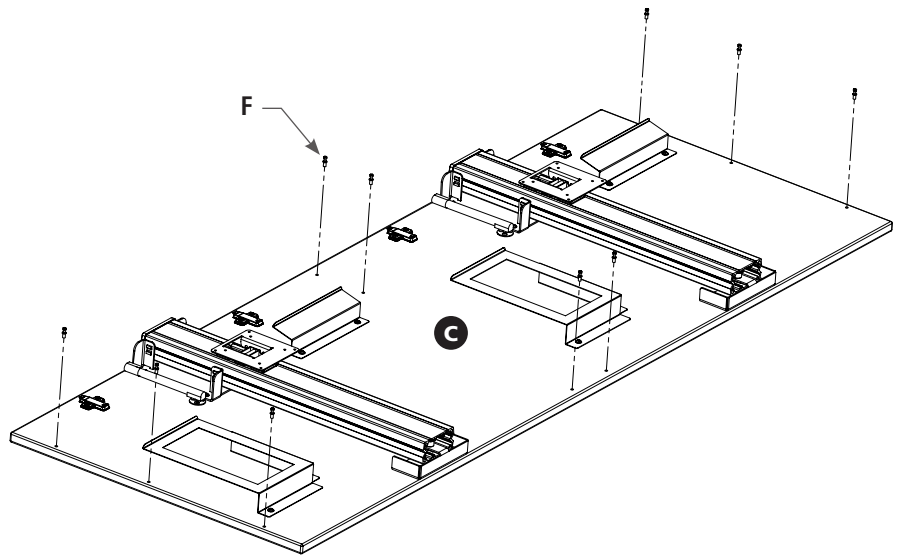


## Step 6 (Assembly D)

- Lay the kick panel on a flat surface.
- Align the wire managements (T) with the pre-drilled holes.
- Attach them with washer head wood screws (E).
- Insert the Slim Fix Bolts (F) into the pre-drilled holes.
- Then set the assembly off to the side.
- This will be "Assembly D"



A




B




C




E



F





T

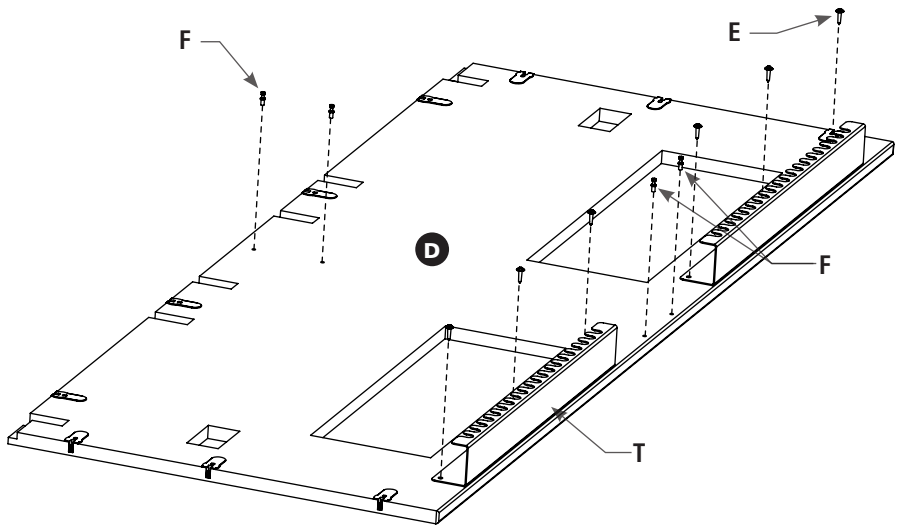




## Step 7 (Assembly E)

- Lay the worksurface access door on a flat surface with the holes facing up.
- Insert the Slim Fix Bolts (F) into the predrilled holes.
- Set off to the side.
- This will be "Assembly E"

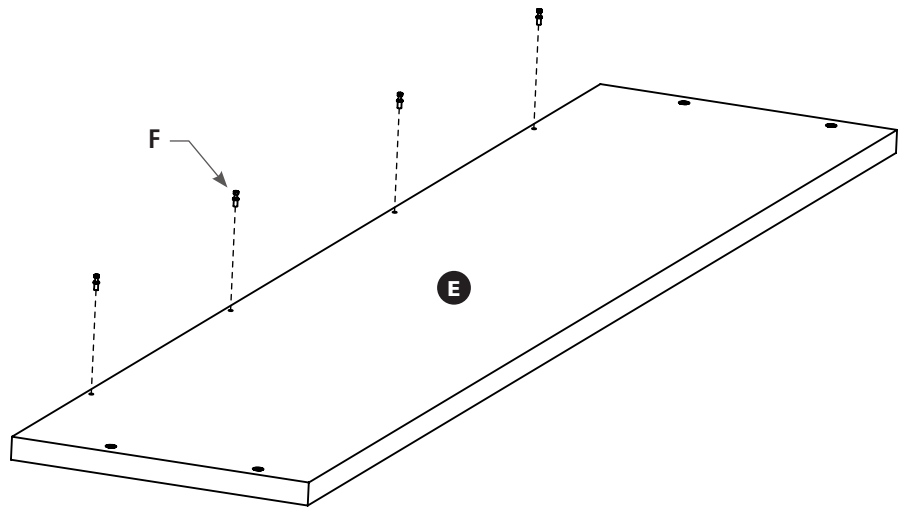

## Step 8 (Assembly F)

- Lay the back sections of the worksurfaces on a flat surface with the holes facing up.
- Take the top parts of the hinge (N) and align them with the pre-drilled holes. Attach them with the screws provided in the package (I).
- Align the top part of the gas strut (P) with the predrilled holes. Make sure the ball is facing away from the center. Attach the screws provided in the package (H).
- Set the assembly off to the side.
- This will be "Assembly F"

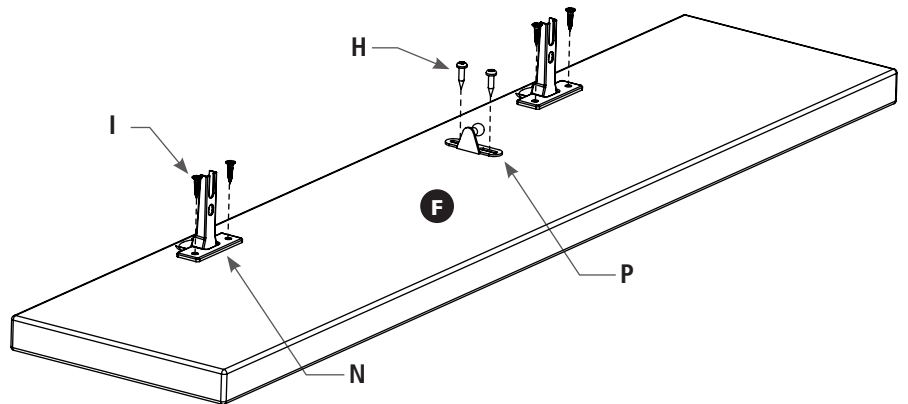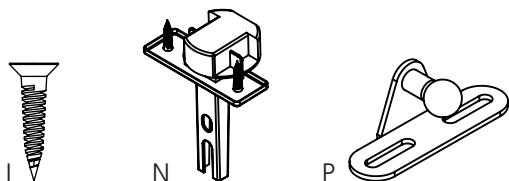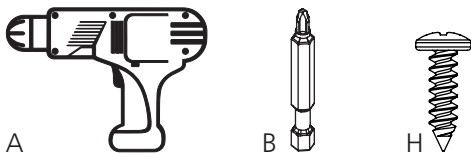


## Step 9

- Take Assembly "A" and make sure all the cams are open with a Philips screwdriver.
- Carefully insert the Slim Fix Bolts from "Assembly C" into the cams of "Assembly A".
- Lock the cams.
- Then do the same thing with "Assembly B"


**PRO TIP**

Closed = Clockwise

Open = Counter-Clockwise




D

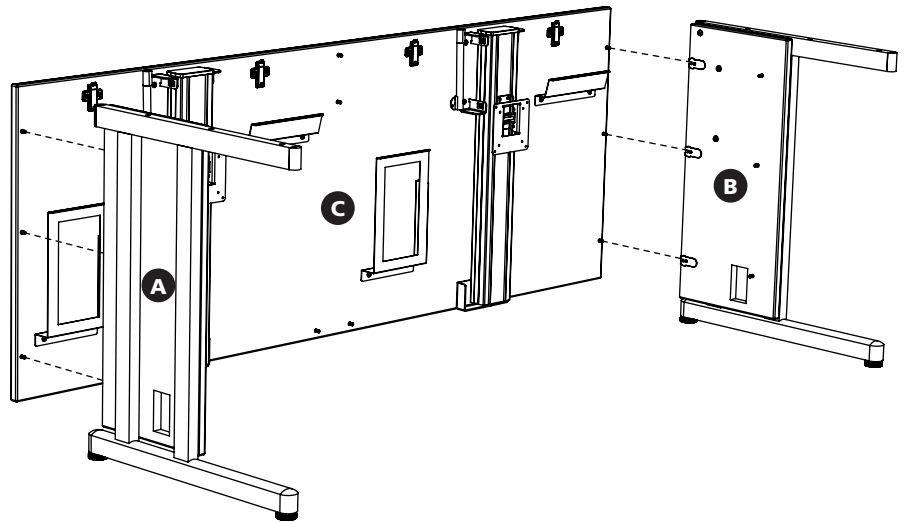


## Step 10

- Take "Assembly D" and make sure all the cams are opened.
- Carefully insert the cams from "Assembly D" onto the Slim Fix Bolts from "Assembly A" and "Assembly B".
- Lock the cams.





D

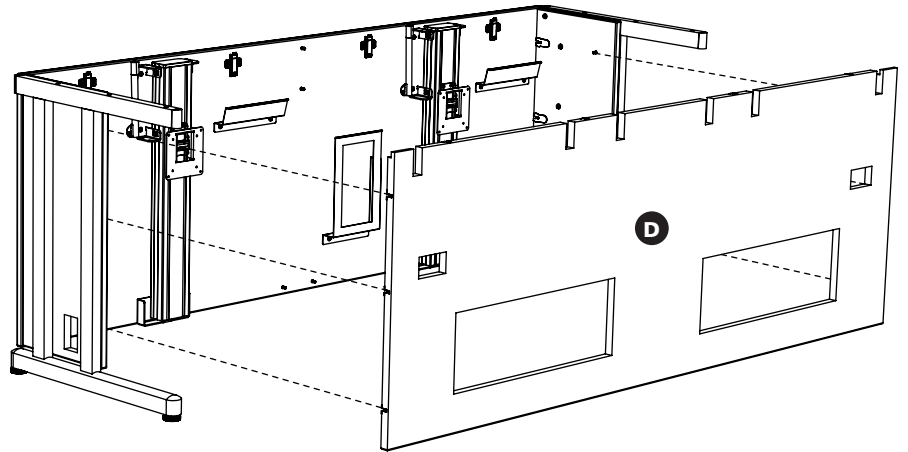



## Step 11

- With the help of another person, tip the desk back some to install the bottom reinforcement panel.
- Lock the cams.
- Install the top reinforcement panel.
- Lock the cams.

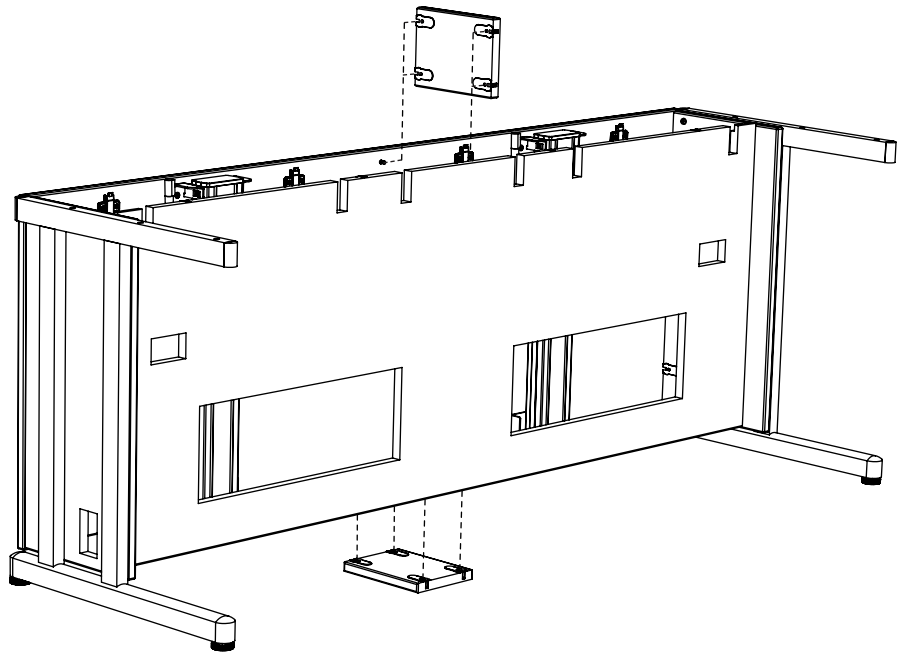



## Step 12

- Take "Assembly F" and carefully insert the Slim Fix Bolts into the cams on "Assembly D".
- Lock the cams
- Insert the bolts (J) through the legs into the work surface and tighten them up.





May have to manually manipulate the legs to align with the holes.

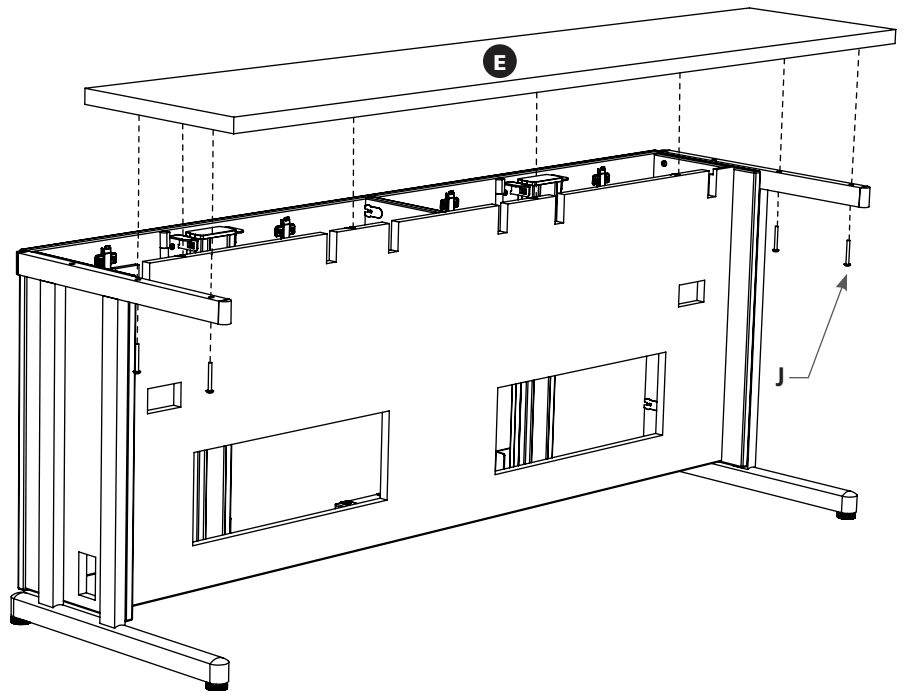


## Step 13

- Take "Assembly E" and slide the top part of the hinge into the bottom part of the hinge.
- Tighten screws for the hinge brackets.

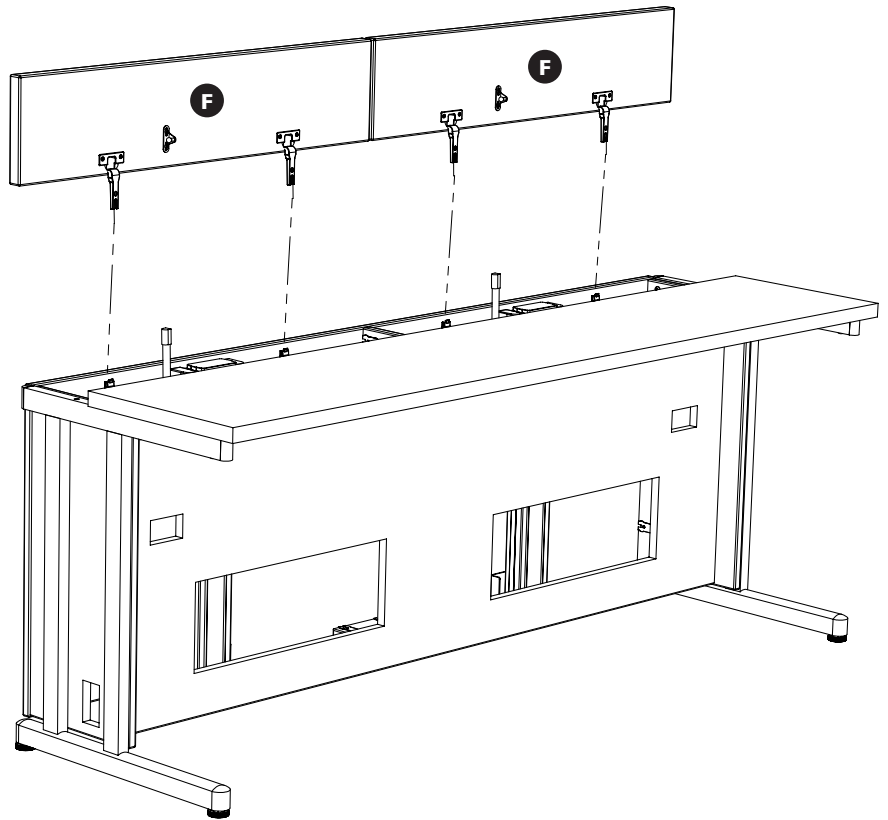



## Step 14

- Snap the tube end of the gas strut into the ball of the top gas strut mounting bracket (P).
- Attach two rubber bumpers (K) to inside of each door - one on the top left corner and one on top right corner. The outermost bumpers
- The two outermost bumpers (labeled K.1) should be placed 3/4" from the door edge. The two innermost bumpers (labeled K.2)

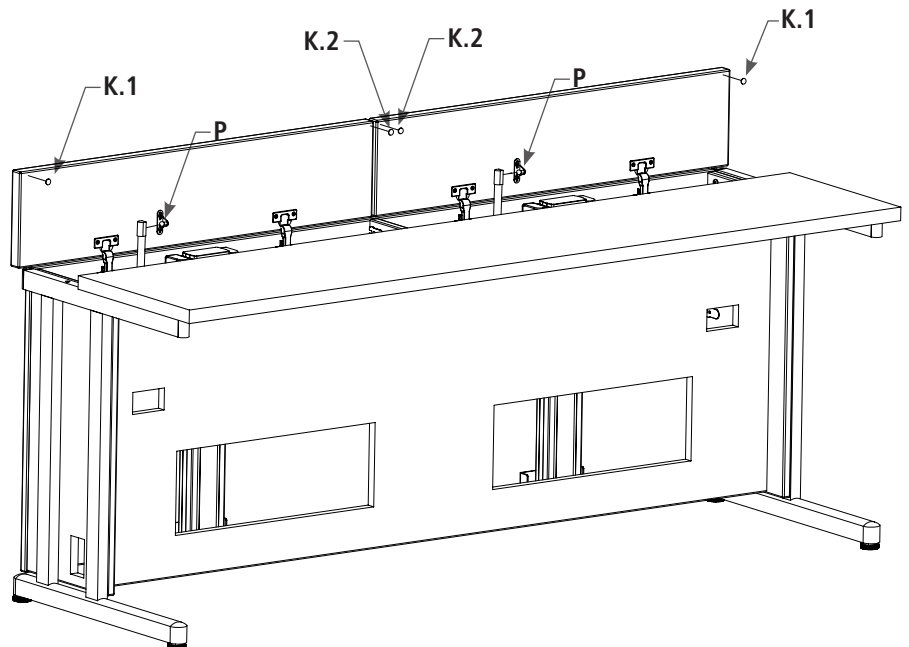


## Step 15

- Place the monitors face down on a flat surface.
- Line the holes on the monitor bracket (Z) with the holes on the monitor match “top” sticker with top of monitor.
- Install (L) the screws and fasten them down tight.

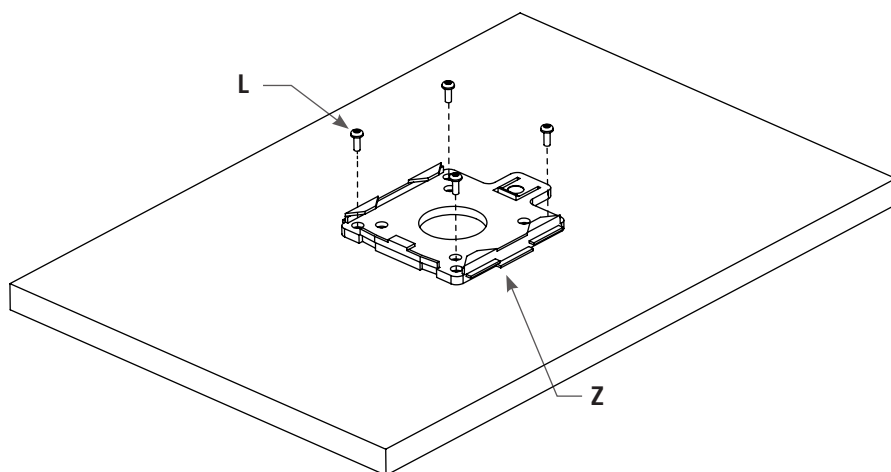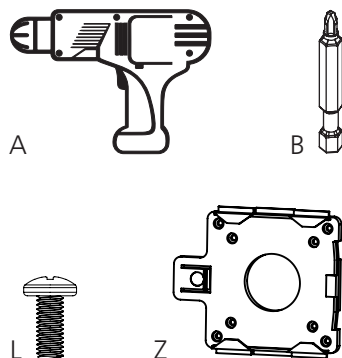


## Step 16

- Push down on the column assembly until you hear a click and then remove your hand to let it rise.
- To lower it, push down the column assembly until you hear a click and slowly remove your hand.

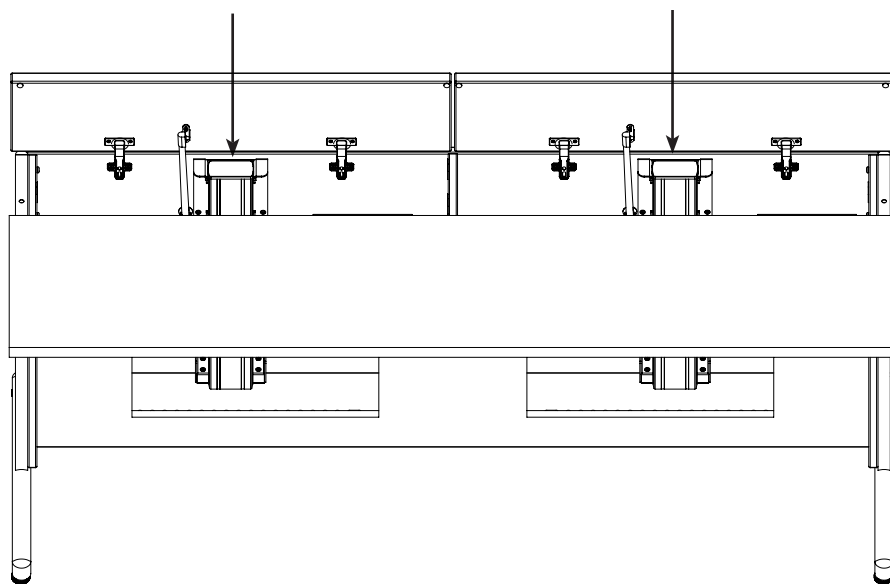

## Step 17

- Slide the monitor and motor bracket assembly onto the Column Assembly.

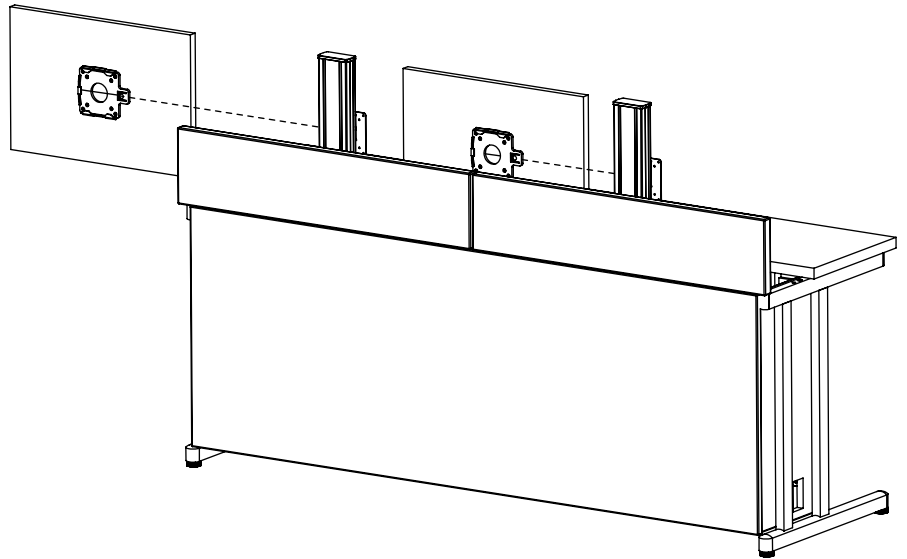


## Step 18


- Insert the grommets (U) into the panels.
- Insert the access door assembly (V) and close the latch.



You may need to press in the grommets in place or may have to tap them gently with a rubber mallet.



U

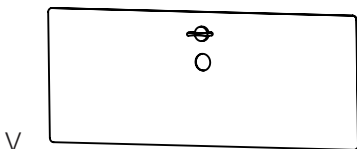

V

