


FEATURES:

1. For splicing two copper or aluminum wires of equal or different sizes.
2. Made of 6061T-6 aluminum alloy.
3. Electro-tin plated for low contact resistance.



| | |
|------------|------------|
| PROGRAM: | SOLIDWORKS |
| UPDATED: | 03/2024 |
| SALES REV: | A |
| SIZE: | B (11x17) |

MECHANICAL CONNECTORS: SR SERIES ALUMINUM, DUAL RATED, SPLICER & REDUCER

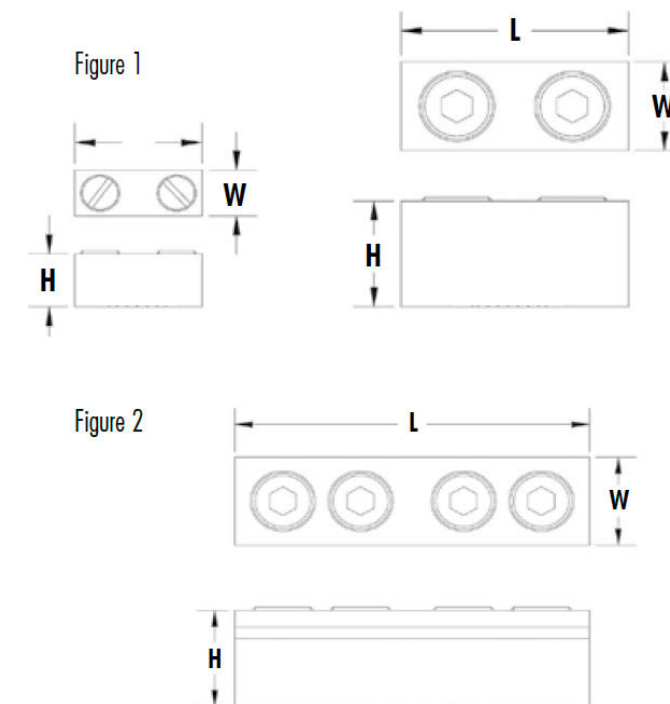

| CAT. NO. | FIG. NO. | WIRE RANGE | MAX TORQUE VALUE (IN./LBS.) | HEX WRENCH SIZE (IN.) | LENGTH (L) (IN.) | WIDTH (W) (IN.) | HEIGHT (H) (IN.) | STD. CTN. QTY. |
|----------|----------|-----------------|-----------------------------|-----------------------|------------------|-----------------|------------------|----------------|
| 2SR | 1 | 2-14 AWG | 50 | Slotted | 1.594 | 0.443 | 0.550 | 50 |
| 1/0SR | 1 | 1/0-14 AWG | 120 | Slotted | 1.500 | 0.530 | 0.630 | 25 |
| 4/0SR | 1 | 4/0-6 AWG | 250 | 5/16 | 2.310 | 0.812 | 1.000 | 24 |
| 250SR | 2 | 250 MCM-6 AWG | 330 | 5/16 | 4.094 | 0.812 | 1.000 | 10 |
| 350SR | 2 | 350 MCM-6 AWG | 400 | 3/8 | 4.190 | 1.130 | 1.190 | 8 |
| 500SR | 2 | 500 MCM-3/0 AWG | 550 | 3/8 | 5.000 | 1.380 | 1.500 | 3 |
| 750SR | 2 | 750-250 MCM | 550 | 3/8 | 6.250 | 1.630 | 1.750 | 3 |

SPECIFICATIONS:

- UL Listed for Wire Connector.
- UL486A/B Listed. AL9CU
- Temperature Rating: 90 °C.
- Voltage: 600V max. (2000V ma. per UL486B)

