


**FEATURES:**

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSI compression tool (N12ID).
6. Dimensions are for reference only.



# C Series: C-2/0



<b>PROGRAM:</b>	SOLIDWORKS
<b>UPDATED:</b>	9/2022
<b>SALES REV:</b>	A
<b>SIZE:</b>	B (11x17)

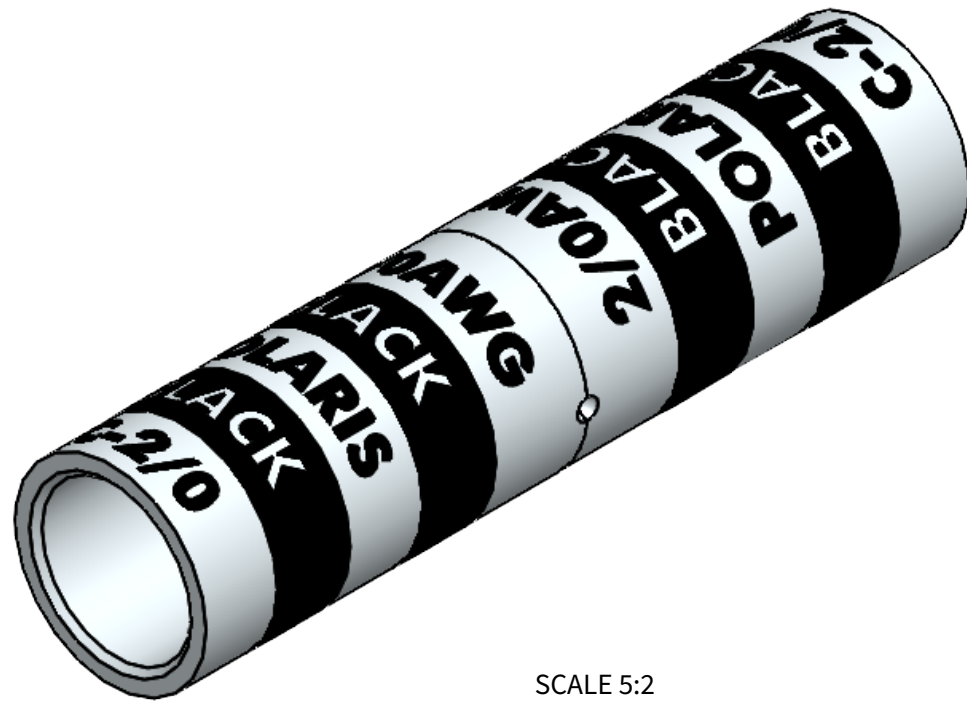

SCALE 5:2

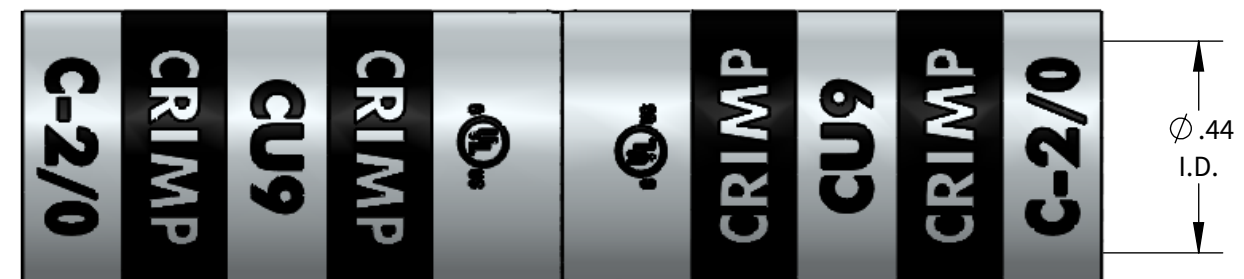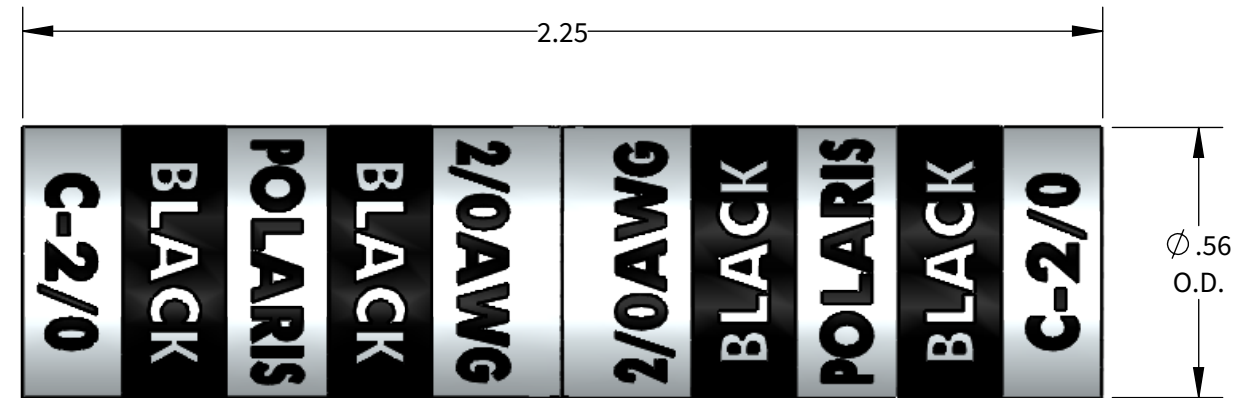

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

WIRE SIZE	STRIP LENGTH	DIE COLOR	EXPANDED WIRE RANGE W/N12ID	COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)								
				NSI			GREENLEE & ILSCO		BURNDY	T&B	HUSKIE	
2/0AWG	1-3/16"	BLACK	2/0AWG-#4AWG	N1240 SERIES	NSI-12	NSI-12	GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15		Y-35, Y750, PAT 750	TBM-15, TBM-14M	EP510C	
				KC12-2/0 (2)	CD7 (4)	HT41AZ (4)	KC12-2/0 (2)	ILD-6 (4)	U26RT (2)	15526 (4)	HT41AZ (4)	CD7 (4)

