




TORK®

2025
PHOTOCONTROLS & ACCESSORIES CATALOG



TABLE OF CONTENTS

1 PHOTOCONTROLS



9 SIGNALING DEVICES



17 POOL & SPA



21 OCCUPANCY SENSORS




TORK®

**Since
1922**

TORK has pioneered the time switch industry with reliable digital and mechanical timers for indoor or outdoor appliance automation, alongside a full range of sensors and signals.

We know a thing or two about time. The world may be changing fast, it can seem like lost time. Now, with our automation and Wi-Fi integration, you can save time, energy and money in the field, making TORK products an attractive part of any professional's equipment. Modern innovation, backed by a trusted legacy of quality, sets TORK above the competition.

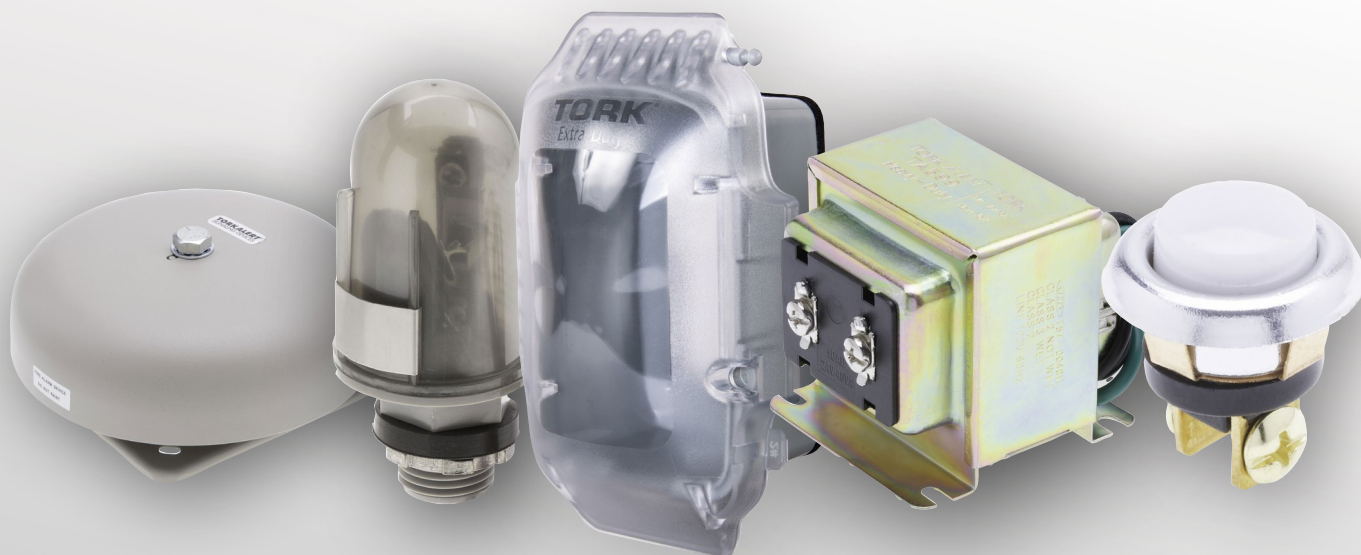

PHOTOCONTROLS

Thermal photocontrols use bimetal and heat for basic, cost-effective lighting control, while electronic versions offer faster, more precise switching with energy-saving features like zero-cross technology.

PRECISION LIGHTING. RELIABLE CONTROL.

TORK photocontrols offer dependable dusk-to-dawn operation with intelligent sensing technology for maximum energy efficiency. Built to withstand harsh environments and tailored for a wide range of outdoor lighting applications, TORK photocontrols deliver long-lasting performance and flexible control when and where it matters most.

UL/CSA LISTED: SAFETY & COMPLIANCE

Certified to meet rigorous safety and quality standards, ensuring safe and dependable operation.

ZERO CROSS TECHNOLOGY

Minimizes inrush current, extending lamp life and improving energy efficiency in electronic photocontrols.

VERSATILE VOLTAGE OPTIONS

Available in single and multi-voltage options, ranging from 120 to 480VAC, to fit diverse electrical systems.

COLOR-CODED VOLTAGE

Twist-lock photocontrols are color-coded by voltage for easy identification and correct application.

AUTOMATIC LIGHTING CONTROL

Turns lights ON at dusk and OFF at dawn, providing reliable, hands-free operation based on natural light levels.

CAST ZINC & ALUMINUM

Models available with cast zinc or cast aluminum housings for enhanced durability and protection in harsh environments.

WIDE RANGE OF MOUNTING

Offered in button-, swivel-, stem-, and twist-lock designs to suit various fixtures and installation needs.



5237-UL SERIES
5237-UL

DELAY FEATURE

Prevents unnecessary cycling by adding a short delay to avoid false triggers from lightning or car headlights.

FAIL-SAFE DESIGN

Includes fail-on or fail-off features to ensure predictable behavior in case of sensor failure.

THERMAL & ELECTRONIC

Available in thermal models and electronic models to meet different performance needs.



COMMERCIAL

120-480 VAC

BUTTON MOUNT



3002/ZB124 3010/ZB124WP

LIGHT DUTY STEM MOUNT



2000-2 ZS124

HEAVY DUTY STEM MOUNT



2119A 2119A

STEM & SWIVEL MOUNT



2001 ZSS124

TURN-LOCK MOUNT



5000ME 5327-UL ZTL124F

THERMAL	3000 Series	2000 Series	2100 Series	2000 Series	5000 Series
ELECTRONIC	ZB Series	ZS Series	ZZ Series	ZSS Series	5327-UL & ZTL-Series

RESIDENTIAL

120-240 VAC

BUTTON MOUNT



THERMAL RKP300 Series

LIGHT DUTY STEM MOUNT



RKP200 Series

STEM & SWIVEL MOUNT



RKP200 Series

TURN-LOCK MOUNT



RKP500 Series

BUTTON MOUNT PHOTOCONTROLS



THERMAL BUTTON MOUNT 3000 SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR
1	3000	Thermal-Type Photocontrol w/ Threaded Stem for Flush Mounting	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
1	3002		208-277	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
1	3006		347	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
2	3010	Thermal-Type Photocontrol w/ Wall Plate for Flush Mounting	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS

ELECTRONIC ZERO-CROSS BUTTON MOUNT ZB SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR
1	ZB124	Zero-Cross Electronic Photocontrol w/ Threaded Stem for Flush Mounting	120-277	Lexan® Plastic	455J	1.5 fc	1.5:1	Instant	Yes	Silicon
1	ZB480		347-480	Lexan® Plastic	455J	1.5 fc	1.5:1	Instant	Yes	Silicon
2	ZB124WP	Zero-Cross Electronic Photocontrol for Flush Mounting w/ Wall Plate	120-277	Lexan® Plastic	455J	1.5 fc	1.5:1	Instant	Yes	Silicon

RESIDENTIAL BUTTON MOUNT RKP SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR
1	RKP301	Thermal-Type Photocontrol w/ Threaded Stem for Flush Mounting	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
3	RKP303	Thermal-Type Mini Photocontrol w/ Threaded Stem for Flush Mounting	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
2	RKP311	Thermal-Type Photocontrol for Flush Mounting w/ Wall Plate	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS

STEM MOUNT PHOTOCONTROLS



THERMAL STEM MOUNT 2000 & 2100 SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR
3	2000	Fixed Position Conduit Mount Photocontrol w/ Light Level Adjustment	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
3	2000-2		208-277	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
1	2129A	Heavy Duty Fixed Position Conduit Mount Photocontrol w/ Light Level Adjustment	120-277	Cast Zinc	190J	1-5 fc	3:15 fc	Yes	Yes	CdS
2	2119A		120-277	Cast Aluminum	-	1-5 fc	3:15 fc	Yes	Yes	CdS

THERMAL W/ SWIVEL 2000 SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR
4	2001	180° Swivel Conduit Mount Photocontrol w/ Light Level Adjustment	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
4	2002		208-277	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
4	2018		480	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
5	2021	180° Swivel Conduit Mount Photocontrol, Pencil Style	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
5	2022		208-277	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS



ELECTRONIC ZERO-CROSS STEM MOUNT **ZS, ZZ & ZSS SERIES**

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE [VAC 60HZ]	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR
1	ZS124	Zero-Cross Fixed Position Conduit Mount Photocontrol	120-277	Lexan® Plastic	455J	1.5 fc	1.5:1	Instant	Yes	Silicon
2	ZZ124		120-277	Cast Zinc	455J	1.5 fc	1.5:1	Instant	Yes	Silicon
3	ZSS124	Zero-Cross 180° Swivel Conduit Mount Photocontrol w/ Light Level Adjustment	120-277	Lexan® Plastic	455J	1-5 fc	1.5:1	Instant	Yes	Silicon
3	ZSS480		347-480	Lexan® Plastic	455J	1.5 fc	1.5:1	Instant	Yes	Silicon
4	ZSSP124	Zero-Cross 180° Swivel Conduit Mount Photocontrol w/ Light Level Adjustment, Pencil Style	120-277	Lexan® Plastic	455J	1.5 fc	1.5:1	Instant	Yes	Silicon

RESIDENTIAL STEM MOUNT **RKP SERIES**

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE [VAC 60HZ]	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR
5	RKP201	Fixed Position Conduit Mount Photocontrol w/ Light Level Adjustment	120	Lexan® Plastic	-	1-5 fc	3:15 fc	Yes	Yes	CdS
6	RKP203	180° Swivel Conduit Mount Photocontrol w/ Light Level Adjustment	120	Lexan® Plastic	-	1.5 fc	3:15 fc	Yes	Yes	CdS
7	RKP221	180° Swivel Conduit Mount Photocontrol, Pencil Style	120	Lexan® Plastic	-	1.5 fc	3:15 fc	Yes	Yes	CdS

TURN-LOCK PHOTOCONTROLS



THERMAL TURN-LOCK 5000M SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR	DOMES COLOR
1	5008ME	Thermal-Type Delayed Response Turn-Lock Photocontrol	480	UV Plastic	380J	1-3 fc	5:1	Yes	Yes	Silicon	Yellow
2	5026M		347	UV Plastic	380J	1-3 fc	5:1	Yes	Yes	CdS	Green

ELECTRONIC TURN-LOCK 2008B & 5237-UL SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR	DOMES COLOR
1	2008B	Electronic Instant Response Turn-Lock Photocontrol	420-530	UV Plastic	360J	1.5 fc	1.5:1	Instant	Yes	Silicon	Yellow
3	5237-UL	Electronic Instant Response Turn-Lock Photocontrol	105-305	UV Plastic	360J	1.5 fc	1.5:1	Instant	Yes	Silicon	Blue



ELECTRONIC ZERO-CROSS TURN-LOCK ZTL SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE [VAC 60HZ]	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR	DOVE COLOR
1	ZTL124	"Zero-Cross Electronic Instant Response Turn-Lock Photocontrol *(F suffix: Fail OFF)"	105-305	UV Plastic	510J	1.5 fc	1.5:1	Instant	Yes	Silicon	Blue
2	ZTL124F		105-305	UV Plastic	510J	1.5 fc	1.5:1	Instant	Yes	Silicon	Green
2	ZTL124GR		105-305	UV Plastic	510J	1.5 fc	1.5:1	Instant	Yes	Silicon	Green
3	ZTL124BK		105-305	UV Plastic	510J	1.5 fc	1.5:1	Instant	Yes	Silicon	Black
4	ZTL124B-K1020J		105-305	UV Plastic	1020J	1.5 fc	1.5:1	Instant	Yes	Silicon	Black
5	ZTL480		347-480	UV Plastic	510J	1.5 fc	1.5:1	Instant	Yes	Silicon	Yellow

RESIDENTIAL TURN-LOCK RKP SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE [VAC 60HZ]	HOUSING	MOV	TURN ON LIGHT LEVEL	TURN OFF RATIO	TIME DELAY ON	TIME DELAY OFF	LIGHT SENSOR	DOVE COLOR
6	RKP503	Delayed Response Turn-Lock Photocontrol	105-130	UV Plastic	?	1-3 fc	5:1	Yes	Yes	CdS	Clear
7	RKP504		208-277	UV Plastic	?	1-3 fc	5:1	Yes	Yes	CdS	Maroon



TURN-LOCK ACCESSORIES

FIG. NO.	SKU	DESCRIPTION
1	5500	Shorting Cap, Replaces Photocontrol to Change Light Fixture to Always ON, 480VAC Max
2	5500-OC	Open Cap, Replaces Photocontrol to Change Light Fixture to Always OFF, 480VAC Max
3	2224	3-Prong Turn-Lock Receptacle w/ Mounting Bracket, 120-480VAC
4	2421	3-Prong Turn-Lock Receptacle w/ Mounting Bracket and Plastic Housing, 120-480VAC
5	2227	7-Prong Turn-Lock Receptacle w/ Gasket, 120-480VAC

SIGNALING DEVICES



TORK signaling devices provide dependable visual or audible alerts for industrial and commercial settings, ensuring clear communication and enhanced safety in critical applications.

CLEAR SIGNALS. CONFIDENT CONTROL.

TORK signaling devices provide dependable visual and audible alerts for industrial and commercial applications. Designed for reliability and ease of integration, these devices offer flexible voltage options, durable construction, and consistent performance—ensuring clear communication and enhanced safety in any environment.

UL/CSA LISTED: SAFETY & COMPLIANCE

Certified to meet rigorous safety and quality standards, ensuring safe and dependable operation.

AUDIBLE & VISUAL ALERTS

Provides clear audible and/or visual signaling for effective communication of alerts, warnings, or status notifications.

CUSTOMIZABLE TONES & FLASH

Select models offer adjustable sound tones and configurable flash patterns to meet specific alerting requirements and enhance recognition.

WIDE RANGE OF DEVICES

Includes bells, buzzers, horns, chimes, strobes, and sirens to suit various signaling needs and environments.

EASY INTEGRATION

Can be paired with timers, occupancy sensors, and other control devices for automated or on-demand signaling.



WARNING LIGHTS

TA93-2RN5

INDOOR & OUTDOOR MODELS

Available in indoor-rated and weather-resistant outdoor models with durable housings to withstand harsh conditions.

APPLICATIONS

Ideal for schools, factories, warehouses, offices, commercial buildings, and industrial facilities—used for class change alerts, shift change signaling, emergency notifications, and general-purpose alerts

WARNING LIGHTS



WARNING LIGHTS

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	COLOR	CURRENT (AMPS)
1	TA47RN5	360° Beacon Light	117	Red	0.9
2	TA93-2RN5	Midi-Strobe Light w/ Snap Out Socket Base. (No Moving Parts)	117	Red	0.04
3	TA52RN5	360° Compact Beacon Light	117	Red	0.21
4	TA52AN5		117	Amber	0.21
5	TA94RN5	Electronic Strobe Light. (No Moving Parts)	117	Red	0.04
6	TA131DRN5	Double Flash Super Strobe for Vehicular Units	120	Red	0.02

MECHANICAL & ELECTRONIC HORNS



INDOOR OR OUTDOOR HORNS

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOUNTING	ALARM TONE	INPUT CURRENT [AMPS]	DB @ 10FT
1	TA874-N5R	Mechanical Horn	120	Steel, Red	4" Square	Fixed	0.07	87
2	TA874-N5		120	Steel, Grey	4" Square	Fixed	0.07	87
3	TA880-N5	Mechanical Horn w/ Xenon Strobe Light for Outdoor Use	120	Plastic, Grey	4" Square	Fixed	0.115	96
4	TA-MTS	Multi-Tone Electronic Horn	115	Plastic	4" Square	Multi-Tone	0.039 - 0.050	75 - 85

BELLS & BUZZERS



INDOOR OR OUTDOOR BELLS & BUZZERS

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	HOUSING	MOUNTING	GONG SIZE	INPUT CURRENT (AMPS)	DB @ 10FT
6	TA340-6G5	Heavy Duty Steel Gong Bell for Indoor/Outdoor Use	24 VAC	Steel, Grey	4" Square	6"	0.32	81 - 95
6	TA340-6N5		120	Steel, Grey	4" Square	6"	0.065	81 - 95
7	TA434-6N5		120	Steel, Red	4" Square	6"	0.065	81 - 95
8	TA740	General Purpose Steel Gong Bell	8-16VAC, 3-6VDC	Steel	Included Base	2-1/2"	1	76
9	TA725	General Purpose Steel Buzzer	8-16VAC, 3-6VDC	Steel	Included Base	-	1	88 at 3ft



SIRENS



OUTDOOR SIRENS

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	MOUNTING
1	TA315-1N5	Weatherproof Motor Driven Warning Siren	120	180° Base

DOOR OPENERS & SWITCHES



REMOTE UNLOCKING

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE	CURRENT [AMPS]
1	TA09	Mortise type remote opener,	8-16VAC, 3-6VDC	.95-1.75, 1.25-1.80
2	TA154	Rim type remote opener	16VAC, 3-6VDC	.95-1.75, 1.25-1.80

SWITCHES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE	CURRENT [AMPS]
3	TA60	Magnetic switch contacts. Circuit closed with magnet engaged	-	-
3	TA62	Magnetic switch contacts. Circuit open with magnet engaged	-	-
4	TA67W	Magnetic switch contacts. Terminal Cover	-	-
5	TA44	Door/window contact, rolling ball type. Normally closed Push to open	12-24V, AC/DC	2
5	TA45	Door/window contact, rolling ball type. Normally open Push to close	12-24V, AC/DC	24
6	TA502	Electric door switch. Light ON when door is open	125VAC, 250VAC	6, 3

PUSH BUTTONS



INDOOR OR OUTDOOR PUSH BUTTONS

FIG. NO.	SKU	DESCRIPTION	SIZE	COLOR
1	TA603L	Illuminated Push-Buttons, Up To 16Vac	1 3/4" (dia)	Gold
2	TA631L		2 3/4" x 7/8"	White
3	TA620L		5/8" (dia)	Chrome
4	TA600	Weatherproof Push-Buttons / Solid Cast Brass With Conduit Backplate	2 1/4" (dia)	Polished Brass
2	TA631		2 3/4" x 7/8"	White
5	TA666BK		2 3/4" X 2 3/4"	Black, ivory
3	TA620		5/8" (dia)	Chrome
6	TA620B		5/8" (dia)	Brass
7	TA1786B	Weatherproof Push-Buttons / Solid Cast Brass Without Conduit Backplate	2 3/8" (dia) x 1.5" H	Brass
7	TA1786CB	Weatherproof Push-Buttons / Solid Cast Brass With Conduit Backplate	2 3/8" (dia) x 1.5" H	Brass


CHIME KIT



CHIME KIT

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	MOUNTING
1	TAC212WL	Chime, 1 Illuminated & 1 Non-illuminated Push-button, 10VA Transformer	16, 10, & 120	Included Base

TRANSFORMERS & ACCESSORIES

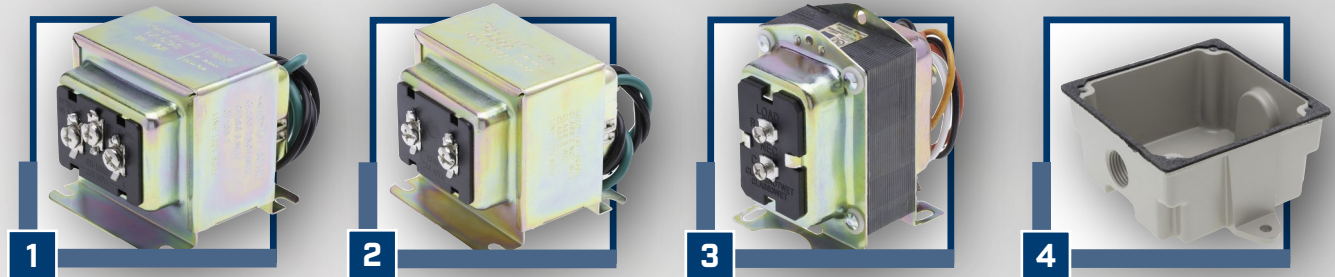

TRANSFORMERS & BACK BOX

FIG. NO.	SKU	DESCRIPTION	VOLTS-AMPS (VA)	PRIMARY VOLTAGE (VAC)	SECONDARY VOLTAGE (VAC)
1	TA598	Tri-Volt Transformer	20-30-30	120	8-16-24
2	TA599	Heavy Duty Transformer	40	120	24
3	TA1245Y-50		50	120/208/240	24
3	TA1245Y-75		75	120/208/240	24
4	TA-WBBF	Weatherproof Back Box, 2 Gang, 1/2" Outlets, Non-Metallic for Use w/ TA880-N5	-	-	-

POOL & SPA

TORK pool and spa controls take the hassle out of maintenance by automating pumps, heaters, and lights—so you can enjoy your water features with ease, efficiency, and peace of mind.

RELIABLE TIMING. RELAXATION MADE EASY.

TORK pool and spa controls offer precise, worry-free scheduling for pumps, heaters, and lighting. Built for durability in outdoor environments, these timers feature easy-to-use settings and dependable performance—giving you the freedom to enjoy your pool or spa with confidence and convenience.

AUTOMATED SCHEDULING

Set precise on/off times for pumps, heaters, and lights to optimize energy use and convenience.

RELIABLE PERFORMANCE

Trusted TORK quality ensures long-lasting, dependable control for residential and commercial settings.

VERSATILE APPLICATIONS

Ideal for pools, spas, hot tubs, fountains, and other water features.

WEATHER-RESISTANT DESIGN

Durable, outdoor-rated enclosures built to withstand harsh poolside conditions.



ENERGY EFFICIENCY


Helps reduce energy consumption by running equipment only when needed.

WEATHERPROOF COVER

XD110C

USER-FRIENDLY INTERFACE

Simple mechanical or digital programming for quick setup and operation.

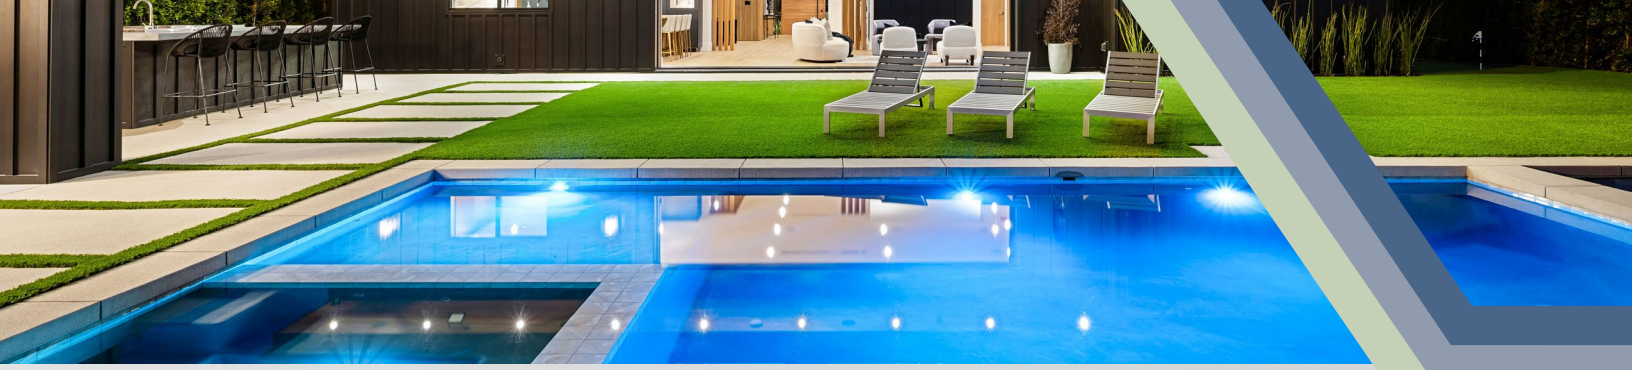

TRANSFORMERS

BEIGE OR STAINLESS



TPX100 SERIES
120V to 12 or 13V

BEIGE OR STAINLESS



TPX300 SERIES
120V to 12, 13, or 14V

VALVE ACTUATOR



TPE24VA
24VAC

IN-USE WEATHERPROOF COVERS



XD110C
Single Gang
16 in 1



XD210C
Dual Gang
73 in 1



XD113C
Single Gang
16 in 1



XD213C
Dual Gang
3 in 1


POOL & SPA TRANSFORMERS



OUTDOOR TPX SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT SUPPLY	OUTPUT SUPPLY	WATTS	FINISH
1	TPX100	Low Voltage Pool & Spa Transformer	120VAC, 1A Max	12 or 13	100W	Beige Painted Steel
2	TPX100S		120VAC, 1A Max	12 or 13	100W	Stainless Steel
1	TPX300		120VAC, 3A Max	12V, 13V or 14V	300W	Beige Painted Steel
2	TPX300S		120VAC, 3A Max	12V, 13V or 14V	300W	Stainless Steel

POOL & SPA VALVE ACTUATORS



OUTDOOR TPE SERIES

POOL & SPA VALVE ACTUATORS			
FIG. NO.	SKU	DESCRIPTION	INPUT SUPPLY
1	TPE24VA	Motorized Pool/Spa Valve Actuator	24 VAC

IN-USE WEATHERPROOF COVERS



OUTDOOR XD SERIES

FIG. NO.	SKU	DESCRIPTION	DEPTH
1	XD110C	Extra Duty Single Gang, In Use Weatherproof Clear Cover	2.75"
1	XD113C	Extra Duty Single Gang, In Use Weatherproof Clear Cover w/ 3/0 Adapter	2.75"
2	XD210C	Extra Duty Dual Gang, In Use Weatherproof Clear Cover	2.75"
2	XD213C	Extra Duty Dual Gang, In Use Weatherproof Clear Cover w/ 3/0 Inserts	2.75"

OCCUPANCY SENSORS

TORK occupancy sensors automatically detect motion to control lighting and reduce energy waste, offering smart, hands-free convenience for commercial, industrial, and residential spaces.

SMARTER SPACES. ENERGY SAVINGS.

TORK occupancy sensors deliver automated lighting control that enhances energy efficiency and convenience. With advanced motion detection, customizable time delays, and versatile mounting options, TORK sensors are ideal for optimizing lighting in offices, warehouses, restrooms, and other commercial spaces—ensuring lights are on when needed and off when not.

AUTOMATIC LIGHTING CONTROL

Detects motion and occupancy to turn lights ON when a space is occupied and OFF when vacant, improving convenience and efficiency.

UL/CSA LISTED: SAFETY & COMPLIANCE

Certified to meet rigorous safety and quality standards, ensuring safe and dependable operation.

VACANCY & OCCUPANCY MODES

Supports both occupancy sensing (auto ON/OFF) and vacancy sensing (manual ON, auto OFF) to meet code requirements and user preferences.

VERSATILE MOUNTING

Available in ceiling or wall mounting options.

EASY INSTALLATION

Designed for simple retrofit or new installations with clear wiring and setup instructions.

LOW-VOLTAGE OPTIONS

24VDC models available for integration with centralized lighting control systems and relays.

OCCUPANCY SENSORS COS-M

PASSIVE INFRARED (PIR) OR ULTRASONIC

Available with PIR (detect heat movement) or ultrasonic sensors (detect sound waves) for reliable performance in a variety of spaces. Select models have combined technology

ADJUSTABLE TIME DELAYS & SENSITIVITY

Customizable time delays, sensitivity levels, and ambient light settings ensure precise control and energy savings.





IN-WALL MOUNT

PIR
1 CIRCUIT



WOS-M & WOS-MN
120/240 VAC

PIR
2 CIRCUIT



WOS-M2R & WOS-MN2R
120/240 VAC

DUAL
1 CIRCUIT



WOS-MN2T
120/240 VAC

CEILING MOUNT

PIR
LOW VOLTAGE



COS-L
24 VDC

DUAL
LOW VOLTAGE



COS-L2T
24 VDC

PIR
HIGH VOLTAGE



COS-M
120/240 VAC

PIR
HIGH MOUNT



HOS-M
120/240 VAC

POWER PACK FOR LOW VOLTAGE



TRP-24 SERIES
24 VDC

PIR = Passive Infrared
Dual = Passive Infrared + Ultrasonic

OCCUPANCY SENSORS



INDOOR WOS, COS & HOS SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	NO. OF RELAYS	SENSOR TECHNOLOGY	COVERAGE (SQ. FT.)	WIRING	COLOR
1	WOS-M	Wall Switch Occupancy Sensor, Line Voltage	120-277	1	Passive Infrared (PIR)	1200	No Neutral	White
1	WOS-MN		120-277	1	Passive Infrared (PIR)	1200	Neutral Required	White
1	WOS-M2R		120-277	2	Passive Infrared (PIR)	1200	No Neutral	White
1	WOS-MN2R		120-277	2	Passive Infrared (PIR)	1200	Neutral Required	White
2	WOS-MN2T		120-277	1	PIR & Ultrasonic	"1200 (PIR) 400 (Ultrasonic)"	Neutral Required	White
3	COS-M	Ceiling Mount Occupancy Sensor, Line Voltage	120-277	1	Passive Infrared (PIR)	1200	Neutral Required	White
3	COS-L	Ceiling Mount Occupancy Sensor, Requires Power Supply TRP-24I or TRP-24B	24VDC	1	Passive Infrared (PIR)	1200	TRP Power Pack Required	White
4	COS-L2T		24VDC	1	PIR & Ultrasonic	"1200 (PIR) 900 (Ultrasonic)"	TRP Power Pack Required	White
5	HOS-M	High Ceiling Mount Occupancy Sensor, Line Voltage	120-277	1	Passive Infrared (PIR)	1200	Neutral Required	White



1

ACCESSORIES

FIG. NO.	SKU	DESCRIPTION
1	COS-ADP	Pendant/Side Mounting Adapter for COS Series, 1/2" Nipple

OCCUPANCY SENSORS POWER PACKS



1

24VDC POWER PACKS TRP SERIES

FIG. NO.	SKU	DESCRIPTION	INPUT VOLTAGE (VAC 60HZ)	NO. OF RELAYS	OUTPUT CONTACTS	INPUTS	WIRING	COLOR
1	TRP-24B	Power Pack for Sensors 120-277VAC to 24VDC, Two Input Wires to Control TRP	120-277	1	SPST	ON/OFF From Switch	Neutral Required	White
1	TRP-24I	Power Pack for Sensors 120-277VAC to 24VDC, Four Input Wires to Control TRP	120-277	1	SPST	ON/OFF From Switch & Hold ON/OFF Override	Neutral Required	White

TORK®

LIVE LIFE SMARTER®

