


640-14

Clear Butyl Window & Door Flashing Tape

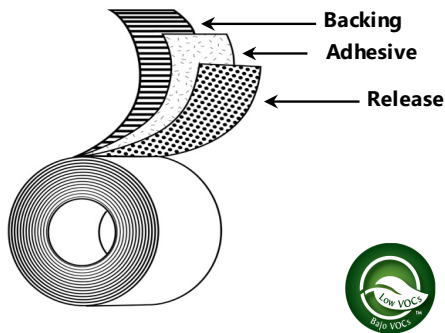

Backing:	Woven Polyethylene (Unprinted or Printed)
Adhesive:	Clear Butyl Rubber
Liner:	PET Film
Colors:	Gray, White
Specifications:	Listed on AAMA's Verified Components List for AAMA 711-22
Standard Sizes:	4" x 75Ft, 6" x 75Ft, 9" x 75Ft, 12" x 75ft

Applications

- Window and door installations
- Corner board abutments
- Side-wall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

Features

- Woven Polyethylene Backing
- Clear Butyl Rubber Adhesive
- PET Film Liner

Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for up to 1 year outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent cold temperature adhesion
- Compatible with sealants and caulking
- Self-healing after puncture
- Used properly, can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED®
- Easy to remove

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/o Liner	14.5 mils	0.37 mm	ASTM D-1000
Adhesion to OSB	96 oz/in	10.50 N/cm	ASTM D3330 Method F
Adhesion to Aluminum	122 oz/in	13.35 N/cm	ASTM D3330 Method F
Adhesion to Vinyl	115 oz/in	12.58 N/cm	ASTM D3330 Method F
Adhesion to Plywood	107 oz/in	11.71 N/cm	ASTM D3330 Method F
Adhesion to Backing	104 oz/in	11.38 N/cm	ASTM D3330 Method F
Tensile Strength (MD)	52 lbs/in		ASTM D3759 Procedure A
Elongation	36%		ASTM D3759 Procedure A
Installation Temperature	0 to 176 °F	-23 to 80 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (101 Oakley Street Evansville, IN 47710) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



101 Oakley Street Evansville, IN 47710
1-800-343-7875 Fax 1-800-328-4822
www.berryglobal.com
9/12/24