

FEATURES:

1. MADE OF DEAD-SOFT EC GRADE ALUMINUM.
2. 840 COMMON DIES - ONE DIE INSTALLS ON ALL SIZES. FOR ALUMINUM OR COPPER CONDUCTORS.
3. PRE-FILLED WITH OXIDE INHIBITOR.
4. INSTALLING DIES: 840,845,76,TX,11A,249.
5. VOLTAGE: 600V MAX.
6. DUAL-RATED FOR USE WITH ALUMINUM AND COPPER CONDUCTORS.
7. CONNECTOR BORES COATED WITH OXIDE INHIBITOR TO PREVENT OXIDATION.




PROGRAM:	SOLIDWORKS
UPDATED:	11/2023
SALES REV:	A
SIZE:	B (11x17)

Aluminum Compression Connectors Dual Rated Meter Socket Lugs

CONDUCTOR									
CAT.NO	CONCENTRIC	COMPRESSED	COMPACT	SOLID	BOLT SIZE	LENGTH (L)	WIDTH (W)	TANG LENGTH (B)	STD.CTN.QTY.
CAL4	4	4	4	-	3/8	3.250	.904	1.3125	12
CAL2	2	2	2 & 1	1	3/8	3.250	.904	1.3125	12
CAL1-48	1	1	1/0	1/0	1/2	3.250	.904	1.3125	12
CAL10	1/0	1/0	2/0	2/0	3/8	3.250	.904	1.3125	12
CAL20	2/0	2/0	3/0	3/0	3/8	3.250	.904	1.3125	12
CAL20-48	2/0	2/0	3/0	-	1/2	3.250	.904	1.3125	12
CAL30-48	3/0	3/0	4/0	-	1/2	3.250	.904	1.3125	12
CAL40	4/0	4/0	250	-	3/8	3.250	.904	1.3125	12
CAL40-48	4/0	4/0	250	-	1/2	3.250	.904	1.3125	12

DIMENSIONS ARE INCHES AND ARE SUBJECT TO CHANGE WITHOUT NOTICE

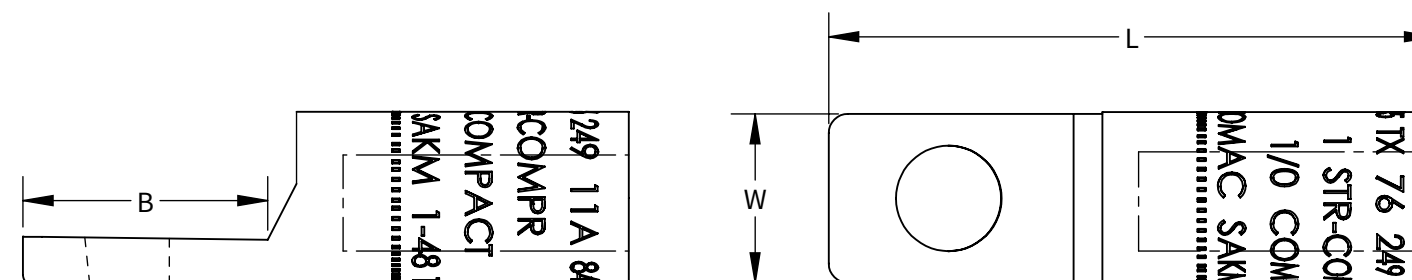

UL SPECIFICATIONS: N/A

TO ORDER NSI PRODUCTS CALL
CUSTOMER SERVICE DEPT
@800-321-5847

FOR NAME OF LOCAL SALES AGENT

techteam@nsiindustries.com

FOR PRODUCT INFO: www.nsiindustires.com

LUGS MEET OR EXCEED ANSI C119.4 SPECIFICATIONS

nsiindustries.com/contactus

800.321.5847

