




REV	MODIFICATION	UPDATE DATE	SIGNATURE

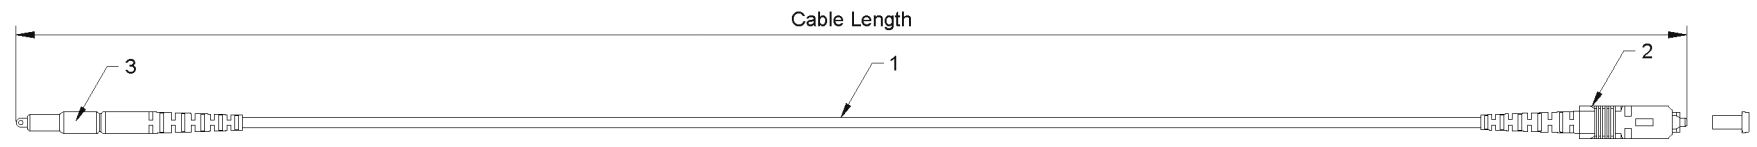

SC Housing + inner cover

NOTES:
 1.Insertion loss ≤0.2dB
 2.Return loss ≥60dB

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

3	1		SC/APC SM 3.0mm Pushable Simplex Connector(Metal Pushable Cap, Green Housing Black Boot)
2	1		SC/APC SM 3.0mm Simplex Connector(Blue Housing Blue Boot)
1	A/R		OD: 3.0mm, Singlemode , 9/125 G657A2 ,Armored, Simplex,Fiber Optic Cable,Color:Black. LSZH UV stabilized
ITEM	QTY	P/N	SPECIFICATIONS



DRAW	Charles Hoskins	DATE	08-03-2023	TITLE: Fiber Optic Patch Cord SC/APC Pushable -SC/APC Simplex 3.0mm SM Armored					
CHECK		APPROVED		CUSTOMER NO		DWG NO	S-SABSA1-NKHI3-xxxF	REV	A