


**FEATURES:**

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only.



# SC Series: SC-2/0



|                   |            |
|-------------------|------------|
| <b>PROGRAM:</b>   | SOLIDWORKS |
| <b>UPDATED:</b>   | 9/2022     |
| <b>SALES REV:</b> | A          |
| <b>SIZE:</b>      | B (11x17)  |

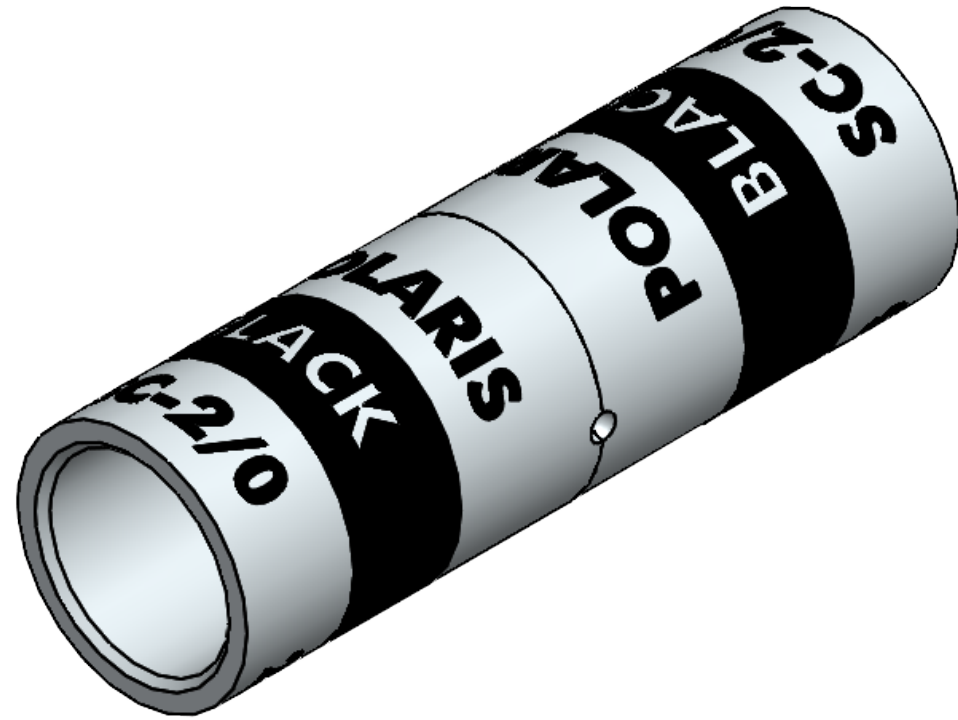

SCALE 3:1

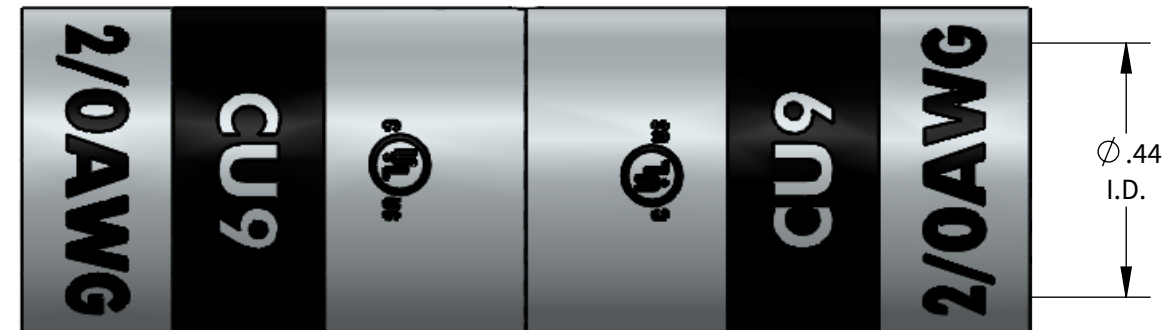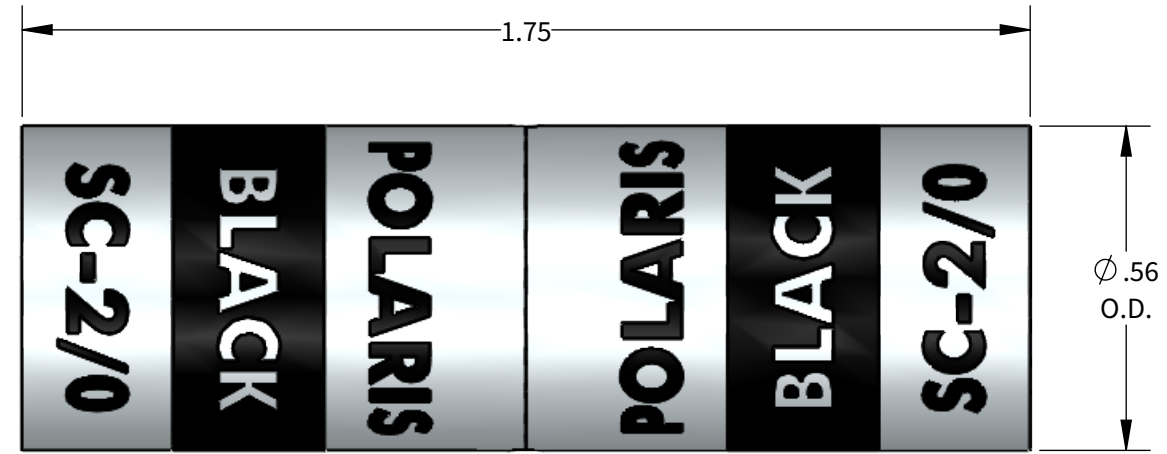

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

| WIRE SIZE | STRIP LENGTH | DIE COLOR | EXPANDED WIRE RANGE W/N12ID | COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE) |         |                  |  |           |                     |                 |            |         |
|-----------|--------------|-----------|-----------------------------|--|---------|------------------|--|-----------|---------------------|-----------------|------------|---------|
|           |              |           |                             | NSI  |         | GREENLEE & ILSCO |  | BURNDY    | T&B                 | HUSKIE          |            |         |
|           |              |           |                             | N1240 SERIES   | NSI-12  | NSI-12           | GREENLEE 1240 SERIES<br>ILSCO ILC-12, ILC-15 |           | Y-35, Y750, PAT 750 | TBM-15, TBM-14M | EP510C     |         |
| 2/0AWG    | 15/16"       | BLACK     | 2/0AWG-#4AWG                | KC12-2/0 (1)   | CD7 (2) | HT41AZ (2)       | KC12-2/0 (1)                                 | ILD-6 (2) | U26RT (1)           | 15526 (2)       | HT41AZ (2) | CD7 (2) |

