

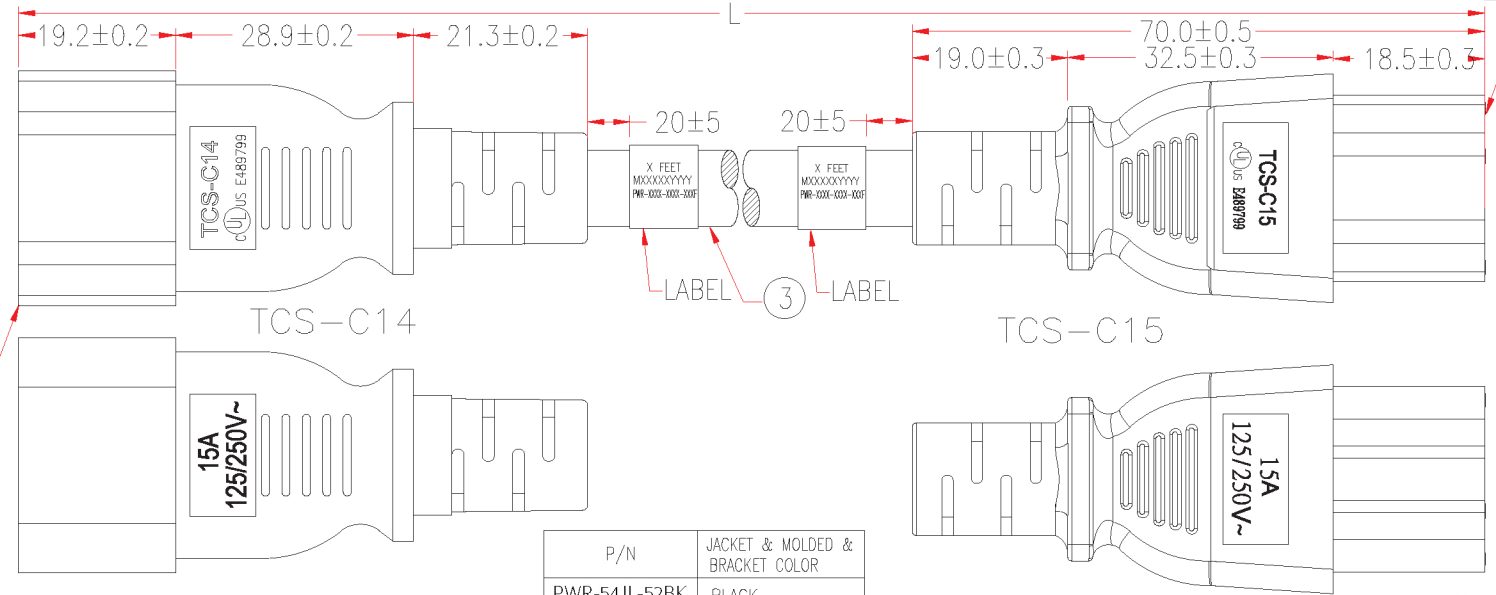


P1: M-060A


P2: M-061A

Customer No.: NO.1




P1: TCS-C14 cULus E489799  
 P2: TCS-C15 cULus E489799

P/N	JACKET & MOLDED & BRACKET COLOR
PWR-54JL-52BK	BLACK
PWR-54JL-52RD	RED(PT201C)
PWR-54JL-52GN	GREEN(PT376C)
PWR-54JL-52BL	BLUE(PT286C)
PWR-54JL-52GR	GRAY(PANTONE421C)
PWR-54JL-52OR	ORANGE(PANTONE1565C)
PWR-54JL-52YW	YELLOW(PANTONE123C)

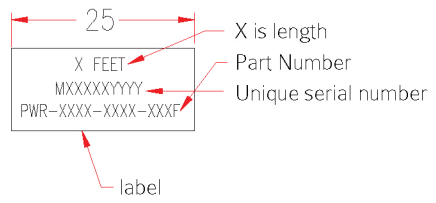

PACKING: 10PCS IN A POLYBAG

PACKING A: <3FT PE  
 PACKING B: >=3FT PE

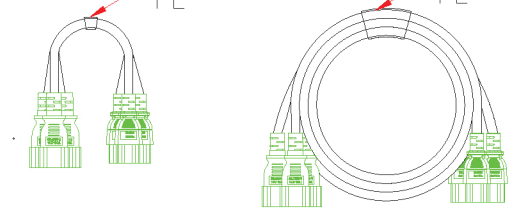

\*NOTE: All relevant materials are complied with RoHS directive .  
 THE MARKING IS CONCAVE LETTERING MOULD  
 The label is waterproof

MARKING:

(UL) SJT 3/C 14AWG(2.08MM<sup>2</sup>) VW-1 105°C 300V E495164  
 C (UL) SJT 3/C 2.08MM<sup>2</sup>(14AWG) FT2 105°C 300V E495164 TCS

P1	P2
L _____	L BLACK
N _____	N WHITE
E _____	E GREEN

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 14AWG x 3C, OD 9.3mm, SJT Jacket	H5TC47-0304	L-40mm M304
2	MOLDED PVC 35P, (COLOR SEE LIST)	H1BC02-0304	M304
	BRACKET: 9745C (COLOR SEE LIST)	A1QC42-0767	1 M767
	TERMINAL: 98745L	A1QB43-0257	3 M257
1	MOLDED PVC 35P,(COLOR SEE LIST)	H1BC02-0304	M304
	BRACKET: YS-014 (COLOR SEE LIST)	A1QC10-0767	1 M767
	TERMINAL: 2x4mm 98672BS-1	A1QB07-0257	3 M257

APPROVED				Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm				
CHECKED					HU	25/SEP/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS
DRAWING					ZHU	25/SEP/17	PRODUCT NO.	PWR-54JL-52xx-xxxF

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

