


Multi-Purpose Duct Tape

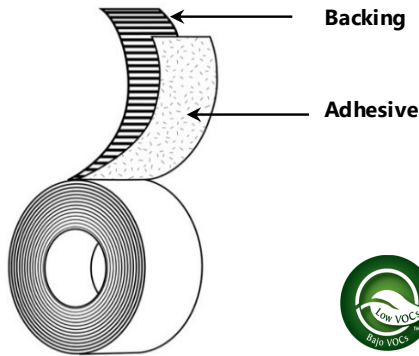

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Silver, Black, Red, White, OD, Blue, Green, Brown, Tan, Yellow
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 48mm x 55m, 72mm x 55m

Applications

- Hanging and seaming poly sheeting
- Sealing and closure tape for poly bags
- Color coding
- Temporary holding and bundling

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Low VOC Content

Benefits

- Good balance of tensile strength and tearability
- Conformable and moisture resistant
- Excellent adhesion to a variety of surfaces
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	10.0 mils	0.254 mm	ASTM D-1000
Adhesion to Steel	80 oz/in	8.80 N/cm	PSTC-101
Adhesion to Backing	35 oz/in	3.83 N/cm	PSTC-101
Tensile Strength	25 lb/in	43.80 N/cm	ASTM D-1000
Elongation	24%		ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.

2320 Bowling Green Road | Franklin, KY 42134
 1-800-343-7878 Fax 1-800-328-4822

www.vybond.com
 7/29/25