



Compact and Portable!

Make big or small fabrications on the job with this lightweight and portable tool! The versatile Mini Brake produces bends up to 135 degrees in sheet metals, including aluminum, copper, and 22-gauge galvanized steel. Use the Mini Brake anywhere on the job site for a variety of fabricating tasks from large HVAC transitions to narrow roof flashing. Optional legs are available separately.



Compact size makes the Mini Brake suitable for use virtually anywhere on the job site. Extra wide feet offer stability even when operating on a truck tailgate.

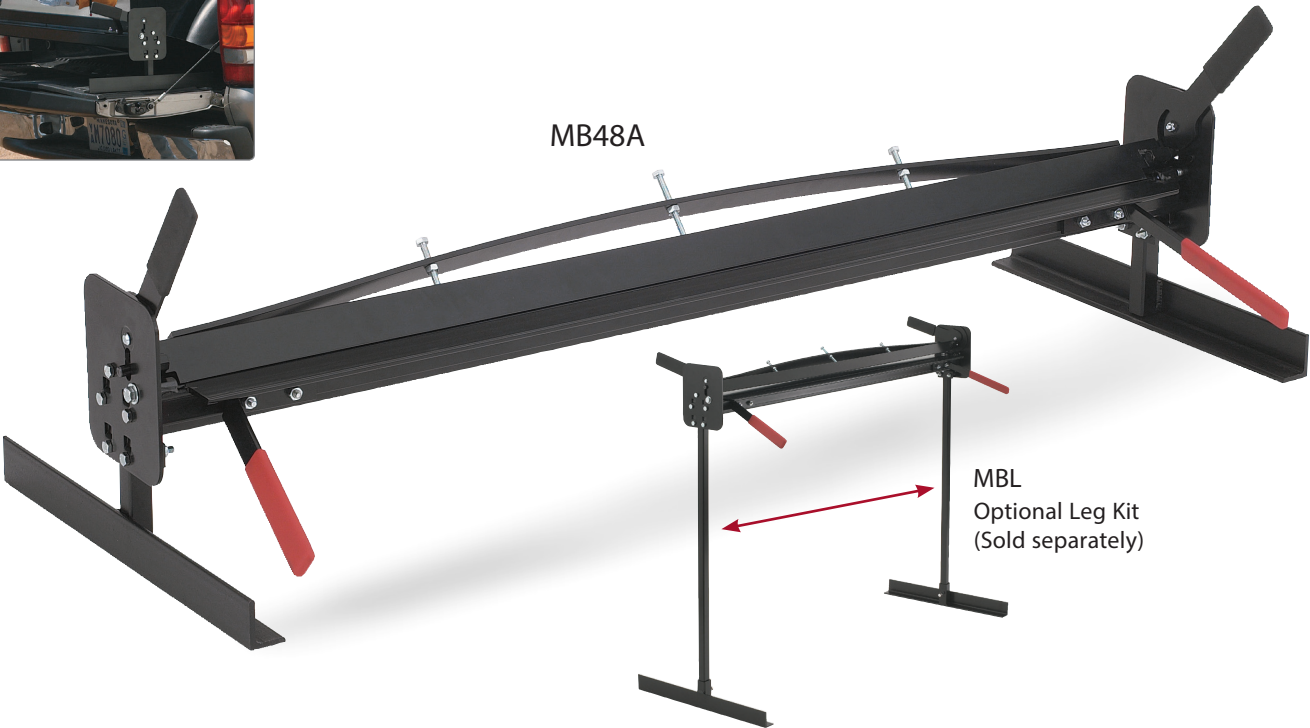

A 5/16 in. (7.9 mm) plate steel apron & adjustable strengthening ribs on anvil assure uniform bends across width of material.




Accommodates sheet metal up to 48 in. (1.2 m) wide in any length. There is no fixed throat depth to contend with.



Versatile bending range accommodates compact fabrications as small as a 4 in. (101.6 mm) square.



The Mini Brake also bends metal roofing components and roof flashing including copper and aluminum.



Dual-direction, cam-over style clamps keep anvil secure in any position. This safety conscious feature prevents anvil from free falling or creating a pinching hazard.

Catalog Number	Description	Minimum Hem Bending Depth		Width	Net Wt.			
		in. (mm)		ft. (M)	lbs. (kg)			
MB48A	Mini-Brake	1/2 (12.7)		4 (1.22)	72 (32.66)			
MBL	Leg Kit	—		—	18 (8.17)			
CAPACITIES	Material	Aluminum 18 Ga.	Soft Copper 18 Ga.	Zinc 18 Ga.	55% Al-Zn Mild Steel 22 Ga.	Stainless Steel 24 Gauge	Galvanized Steel 22 Gauge	Mild Steel 22 Gauge
MB48A	in. (mm)	0.040 (1.02)	0.040 (1.02)	0.040 (1.02)	0.030 (0.76)	0.024 (0.61)	0.034 (0.86)	0.030 (0.76)