

4"

45375 SLIM SQUARE DOWNLIGHT

PROJECT:

TYPE:

DATE:

NOTES:



2700K . 3000K . 3500K . 4000K . 5000K



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for Wet location.

DIMENSIONS

- Cut hole: ø4 1/4".
- Fixture: ø4 11/16" x 15/16"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F) (-20°C~40°C).

LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 110 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 600 lm | 661 lm | 694 lm | 703 lm | 697 lm

CERTIFICATIONS



ORDERING GUIDE


MODEL 45375-019 FINISH White

	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
ø4 1/4"	12W	Up to 703	CCT Selectable	TRIAC/ELV	90+	110°	NO



019- White

PRODUCT DIMENSIONS

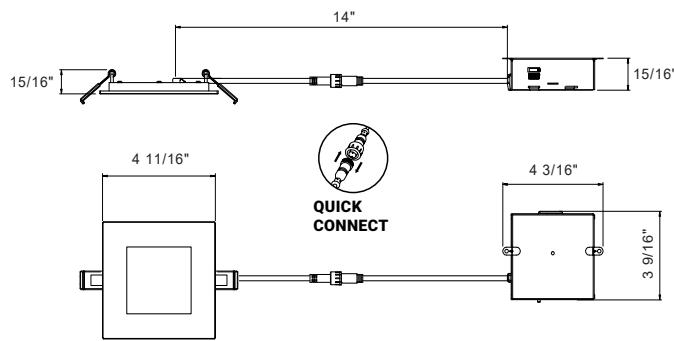

ACCESSORIES

45612-015
60"
3 pin Connector



45376-016
NEW CONSTRUCTION
SMASH PLATE
13 1/4" x 6 1/2"
ø4 1/4"




47205-017
15W REMOTE
EMERGENCY
BACKUP BATTERY




NO IC BOX
REQUIRED

PHOTOMETRICS

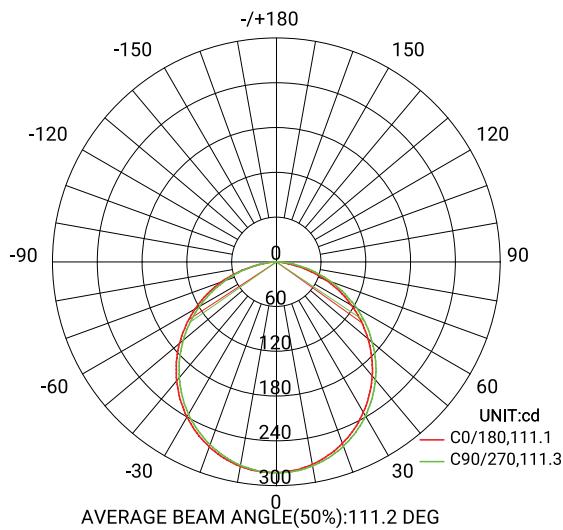

Imperial

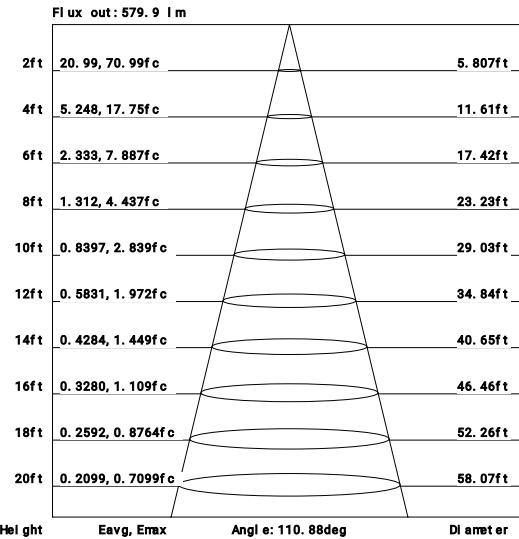

Metrics

