

**FEATURES:**

1. Made of 6061T-6 aluminum alloy.
2. Electro-tin plated for low contact resistance.
3. For use with copper or aluminum conductors.
4. Design includes threaded mounting hole.
5. Turn prevent node located on bottom prevents rotation of lug.



**SPECIFICATIONS:**

1. CSA 70142.
2. UL486A/B Listed. AL9CU.
3. Temperature Rating: 75 °C.
4. Voltage: 600V max. (2000V ma. per UL486B).

**POLARIS®**

PROGRAM:	SOLIDWORKS
UPDATED:	09/2024
SALES REV:	A
SIZE:	B (11x17)

# BTP Series: Aluminum, Dual Rated, Box Turn-Prevent Lugs

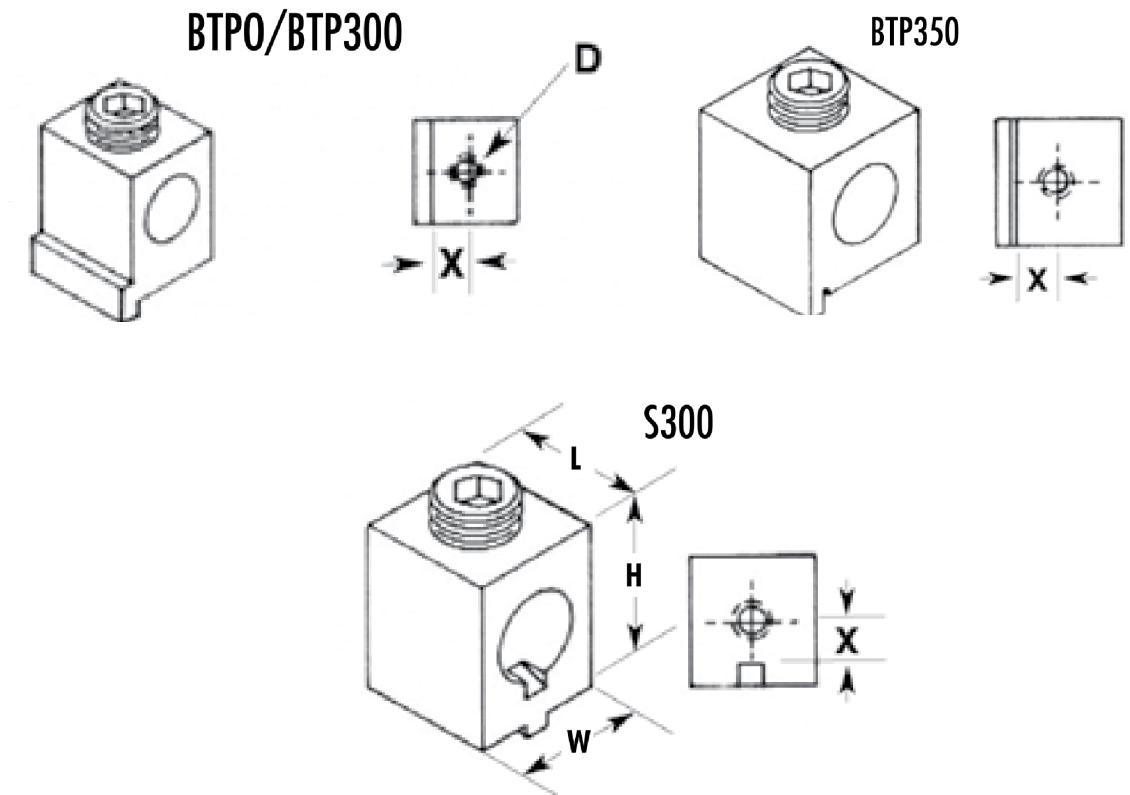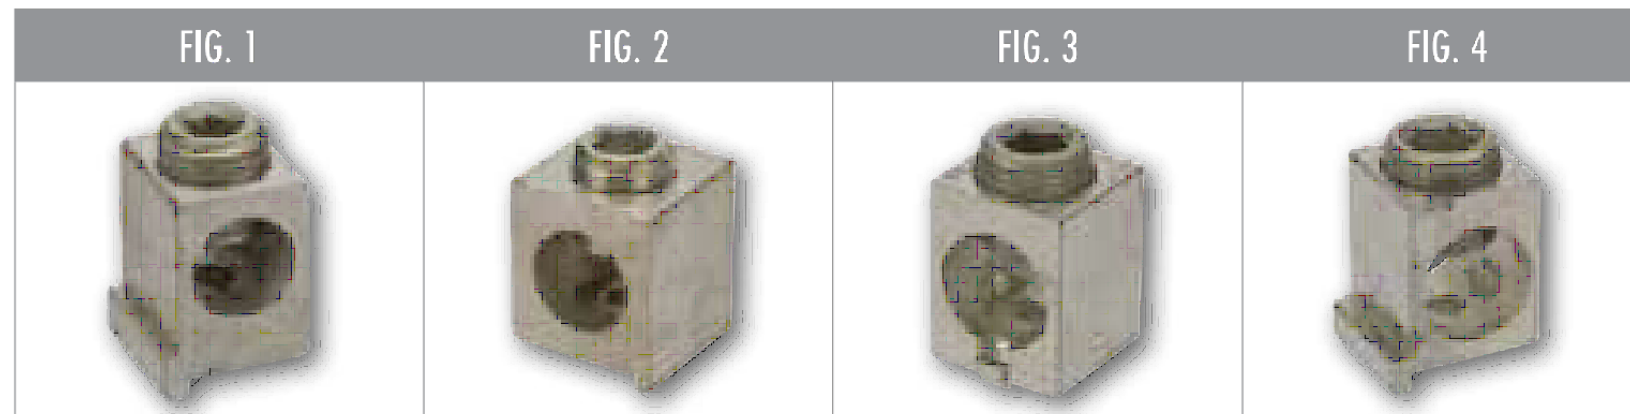

CAT. NO.	FIG. NO.	WIRE RANGE	MAX TORQUE VAULE (IN./LBS.)	HEX WRENCH SIZE (IN.)	MTG. BOLT SIZE	WIDTH (W)	HEIGHT (H)	LENGTH (L)	MTG. HOLE DIA. (D)	TURN PVT. TO MTG. HOLE (X)
BTPO	1	0-10 AWG	120	5/16	#10	0.660	0.830	0.620	#10	0.230
BTP300	2	300 MCM-6 AWG	325	3/8	1/4	0.970	1.160	0.980	0.250	0.385
S300	3	300 MCM-6 AWG	325	3/8	1/4	0.880	1.090	0.880	0.250	0.312
BTP350	4	350 MCM-6 AWG	375	3/8	1/4	0.880	1.100	0.880	0.250	0.440