


P1: M-060A


P2: M-062A

Customer No.: No.1


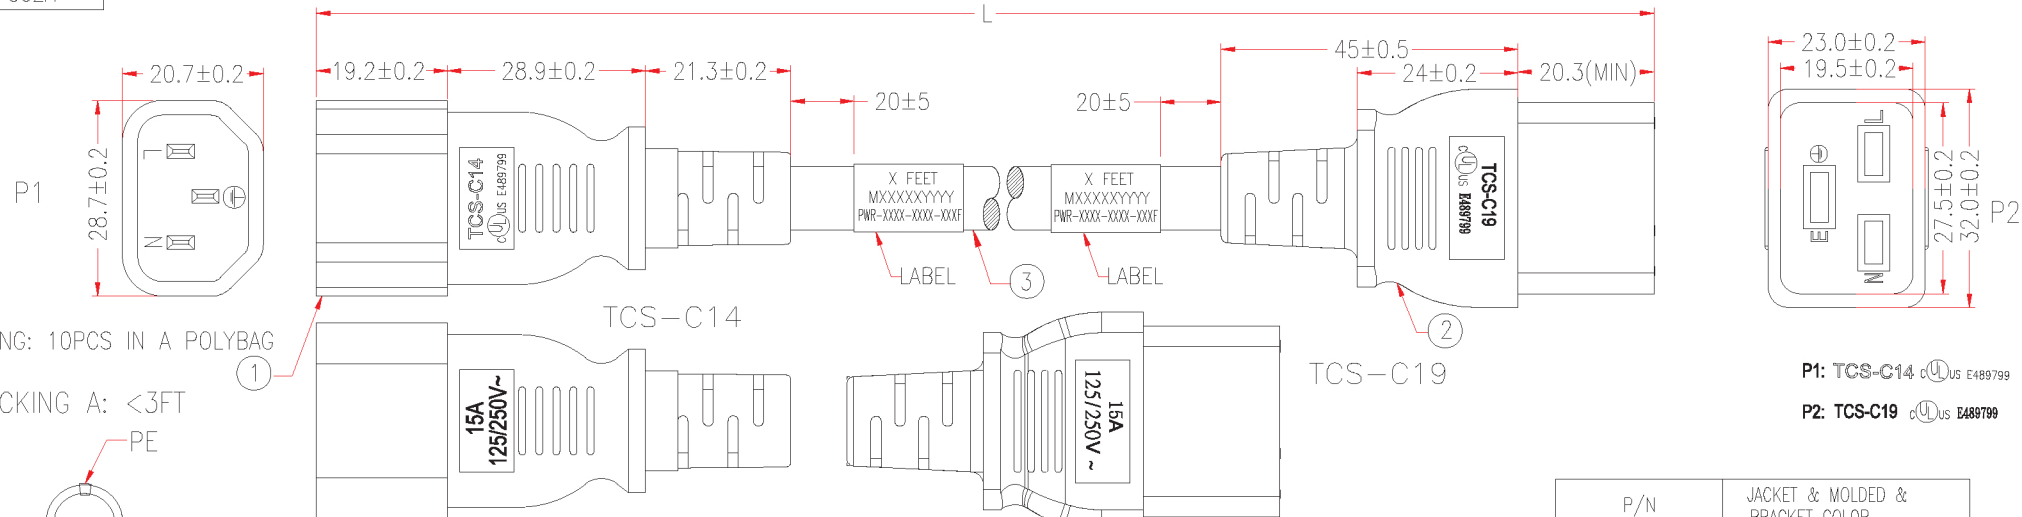


PACKING: 10PCS IN A POLYBAG

PACKING A: <3FT



PACKING B: >=3FT

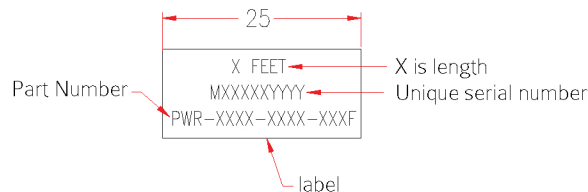

P1: TCS-C14 cULus E489799

P2: TCS-C19 cULus E489799

P/N	JACKET & MOLDED & BRACKET COLOR
PWR-94JL-52BK	BLACK
PWR-94JL-52RD	RED(PT201C)
PWR-94JL-52GN	GREEN(PT376C)
PWR-94JL-52BL	BLUE(PT286C)
PWR-94JL-52GR	GRAY(PANTONE421C)
PWR-94JL-52OR	ORANGE(PANTONE1565C)
PWR-94JL-52YE	YELLOW(PANTONE123C)

MARKING: THE CABLE MARKING IS CONCAVE LETTERING MOULD
 (UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E495164
 C (UL) SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V E495164 TCS

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

NOTE: All relevant materials are complied with RoHS directive .
 The label is waterproof

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 14AWG x 3C, OD 9.3mm, SJT Jacket		M304
2	MOLDED PVC 35P, COLOR (SEE LIST)		M304
	BRACKET: YST-037 (COLOR SEE LIST)	1	M767
1	TERMINAL: 98739ABS-0	3	M257
	MOLDED PVC 35P, COLOR (SEE LIST)		M304
	BRACKET: YS-014 (COLOR SEE LIST)	1	M767
	TERMINAL: 2x4mm 98672BS-1	3	M257

APPROVED					Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	27/SEP/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	ZHU	27/SEP/17	PRODUCT NO.	PWR-94JL-52xx-xxxF	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm