




Rev.	Description	By	Date

Notes:

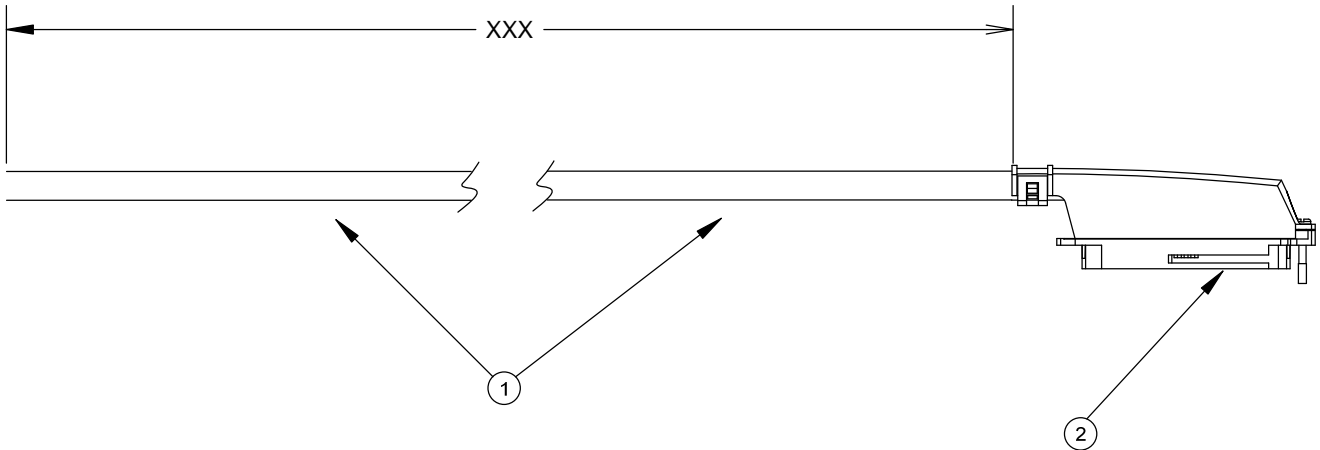

TELCO WIRING (MALE) TABLE			
R=RING	POS	POS	T=TIP
BLUE WHITE	1R	T26	WHITE BLUE
ORANGE WHITE	2R	T27	WHITE ORANGE
GREEN WHITE	3R	T28	WHITE GREEN
BROWN WHITE	4R	T29	WHITE BROWN
SLATE WHITE	5R	T30	WHITE SLATE
BLUE RED	6R	T31	RED BLUE
ORANGE RED	7R	T32	RED ORANGE
GREEN RED	8R	T33	RED GREEN
BROWN RED	9R	T34	RED BROWN
SLATE RED	10R	T35	RED SLATE
BLUE BLACK	11R	T36	BLACK BLUE
ORANGE BLACK	12R	T37	BLACK ORANGE
GREEN BLACK	13R	T38	BLACK GREEN
BROWN BLACK	14R	T39	BLACK BROWN
SLATE BLACK	15R	T40	BLACK SLATE
BLUE YELLOW	16R	T41	YELLOW BLUE
ORANGE YELLOW	17R	T42	YELLOW ORANGE
GREEN YELLOW	18R	T43	YELLOW GREEN
BROWN YELLOW	19R	T44	YELLOW BROWN
SLATE YELLOW	20R	T45	YELLOW SLATE
BLUE VIOLET	21R	T46	VIOLET BLUE
ORANGE VIOLET	22R	T47	VIOLET ORANGE
GREEN VIOLET	23R	T48	VIOLET GREEN
BROWN VIOLET	24R	T49	VIOLET BROWN
SLATE VIOLET	25R	T50	VIOLET SLATE

#	Part Number	Description	Qty
1	IW2450L3	25 Pair, 24 AWG, PVC, CAT3	AR
2	2299131-0	CAT3 50 Pos Female AMP Connector	1
3			1
4			1



UNLESS OTHERWISE SPECIFIED
DIM. ARE IN INCHES-TOL. ON
FRACTIONS DECIMALS ANGLES
+ - .XX .01 + 1/2"
XXX.005

TITLE			
25 Pair PVC CAT3 Female 90° to Blunt			
SIZE	CAGE CODE	DWG NO	REV
A		25CXxxx	A
SCALE: N/A		SHEET 1 of 1	

Drawn By:	J.Riling	Date:	02/10/09
Checked By:		Date:	

This Drawing is the exclusive property of Lynn Electronics
Information contained herein may not be disclosed or duplicated
in any form without the express written consent of Lynn Electronics

