




FEATURES

Lens fixtures are the perfect choice for consistent lighting that spans a large area. These fixtures sit flush to the channel lip and comes with an opal lens to diffuse the light. Available in 3 sizes. Lens fixtures can be joined together seamlessly using the overlap lens found in the accessories section.

SPECIFICATIONS

Light Source:	1 x 10 W Integrated LED
Beam Angle:	115°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	772 Lm
Delivered Lumens:	472 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	11.90"L x 1.30"W x 2.17"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
36372-01




White
36372-02

DIAGRAM

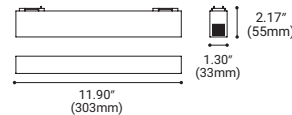

PHOTOMETRICS

H(m)	D(m)	E(lx)
115°		
1.0	3.05	106
2.0	6.10	26
3.0	9.15	11
4.0	12.20	6
5.0	15.26	4




1 m=3.28 ft
1 lx=0.09 fc

COMPATIBLE CHANNELS

SURFACE MOUNT




PENDANT

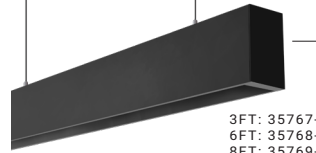


3FT: 35767-01/02
6FT: 35768-01/02
8FT: 35769-01/02

TRIM RECESSED

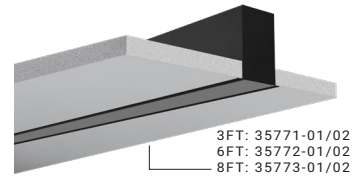

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

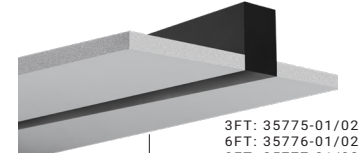

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming