



FEATURES

Dual Lens fixtures are one piece but come with two light modules. These fixtures fit flush to the channel and ceiling line. They are outfitted with an opal Lens to reduce glare and maximize light control.

SPECIFICATIONS

Light Source:	1 x 4.5 W Integrated LED
Beam Angle:	80°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	362 Lm
Delivered Lumens:	180 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	4.13"L x 1.30"W x 2.24"H
Approval:	Indoor use
Electrical Approval:	COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
35765-01



White
35765-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
80°		
1.0	1.19	57
2.0	2.39	14
3.0	3.59	6
4.0	4.79	3
5.0	5.99	2

1 m=3.28 ft
1 lx=0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

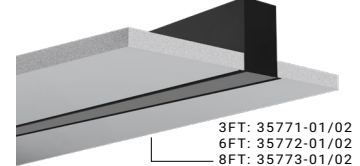

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

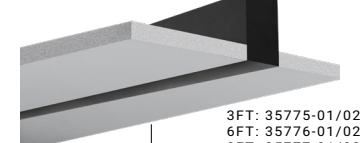

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming