## FEATURES:

- 1.
- Material: Tin Plated CU UL listed for U.S. & Canada. 2.
- 3. 4.
- Wire connector rated for 35Kv max. Class B/C compressed, concentric, and compact copper conductor only.
- Expanded wire range when installed with dieless NSi compression tool (N12ID). 5.
- Dimensions are for referene only. 6.

L Series: L1038P






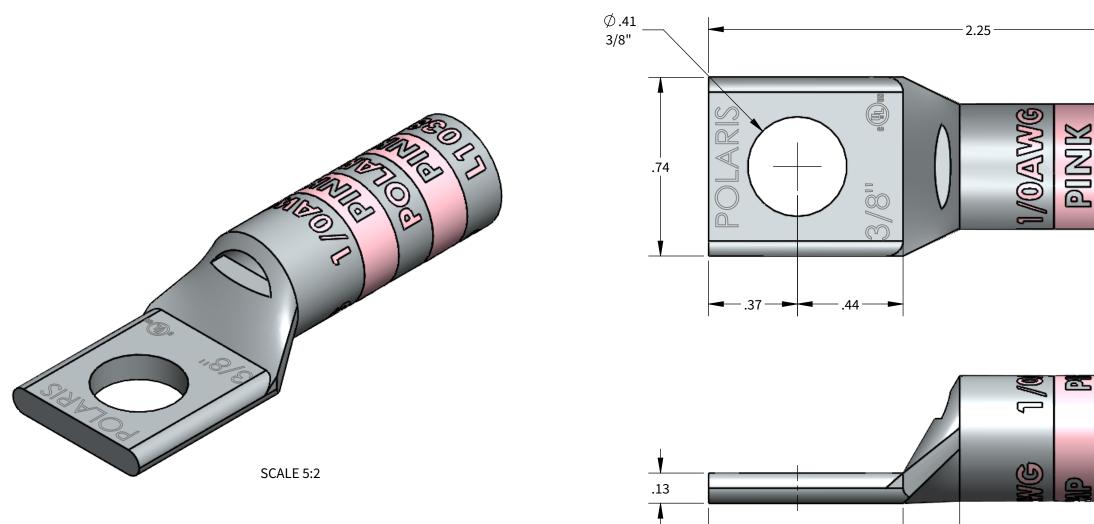


Image: Correct Signer							-	.81		1	20			
WIRE SIZE STRIP LENGTH DIE COLOR EXPANDED WIRE RANGE W/N12ID N1240 SERIES NSI-12 NSI-12 1240 SERIES ILC-12/ILC-15 SERIES Y-35, Y750, PAT 750 TBM-15, TBM-14M EP510C	│ +			COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS)										
WIRE SIZE STRIP LENGTH Die COLOR W/N12ID N1240 SERIES NSI-12 NSI-12 1240 SERIES 11240 SERIES 1-35, 9750, PAT 750 TBM-15, TBM-14M EPSIDE					NSI			GREENLEE	ILS	SCO	BURNDY	T&B	HUSKI	IE
1/0AWG 1-1/4" PINK 1/0AWG-#6AWG KC12-1/0 (2) CD6 (4) HT41AY (4) KC12-1/0 (2) ILD-5 (4) KC12-1/0 (2) U25RT (2) 15508 (4) HT41AY (4) CD6 (4)	WIRE SIZE	STRIP LENGTH	DIE COLOR		N1240 SERIES	NSI-12	NSI-12	1240 SERIES	ILC-12/ILC	ILC-12/ILC-15 SERIES Y-35, Y750, PAT 750 TBM-15, TBM-14M		EP510	.C	
	1/0AWG	1-1/4"	PINK	1/0AWG-#6AWG	KC12-1/0 (2)	CD6 (4)	HT41AY (4)	KC12-1/0 (2)	ILD-5 (4)	KC12-1/0 (2)	U25RT (2)	15508 (4)	HT41AY (4)	CD6 (4)

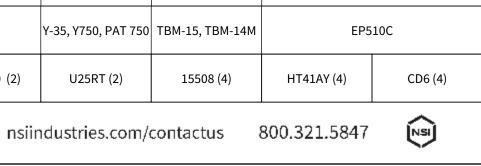





	SOLIDWORKS
UPDATED:	4/2022
SALES REV:	A
SIZE:	B (11x17)