1U HDA Rack Mount

Fiber Patch Panel Enclosure







Extreme Density - 33% increase in density compared to standard LGX panel.



Easy Access - Large opening for easy front cable access to each port.



E-Z Glide[™] Tray - Tray slides smoothly along guides with gentle catches and stops.



Non-captive Mounting Ears - Preinstall screws in rack, simply place rack on screws and tighten.



Blue Bend Radius Bracket - Creates gradual bend for cable preventing kinks.



Magnetic Door - Blue Bend Radius Bracket is magnetized and attaches to metal door.



More Features

- Hinged front and rear doors
- \cdot Removable top panel and front faceplate
- $\boldsymbol{\cdot}$ Non-captive side and rear entries for trunks
- \cdot Standard 19" rack mountable unit

Specifications

- Dimensions: standard 1U height x 19" W x 15 7/8" D • Material: 16AWG steel
- · Coating: electrostatic polyester powder coat black paint

WHAT'S INCLUDED

· 2 blue half-moon cable managers

• 1 ground lug kit

• 4 pressure sensitive Velcro® wire mgmt. straps

• 1 Velcro[®] splice tray tie down (2 meters)


- 10 nylon Fiber Manager Loops
- Mounting hardware: M6 screws, M6 cage nuts • 4 zip ties
- · Port identification label

Splicing	MAX. FIBER COUNT		ADAPTER PANEL Capacity	SPLICE TRAY CAPACITY				
	LC	SC	HDA	Plastic		Metal		
	72	48	4	SI-PA-12 2	ST-PA-24 2 *Can Screw Down	ST-M-12 3	ST-M-24 3 N/A	ST-M-24-8 3
				24	48	36	72	72
Preterminated	144*	48	4					

* Using 36-Fiber adapter plates

HDA Rack Mount Sliding Tray

- Blue Half-moon Cable Managers
- Velcro® Tie Downs
- Screw Down Holes for Splice Tray
- E-Z Glide™ Tray
- Blue Bend Radius Bracket
- Magnetic Door (Blue Bend Radius Bracket is Magnetized)
- Easy Access Opening
- Door Metal Tab (Secures Door on Hinge)

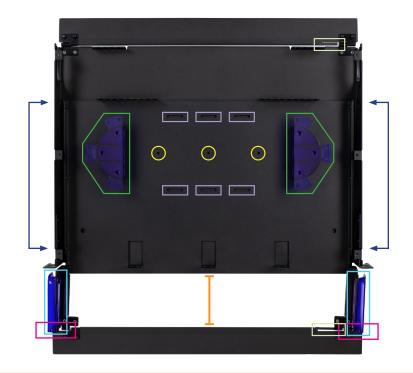




Broadband: (888) 235-2097 Datacom: (800) 523-6075

thinklynn.com

1U HDA Rack Mount

Fiber Patch Panel Enclosure



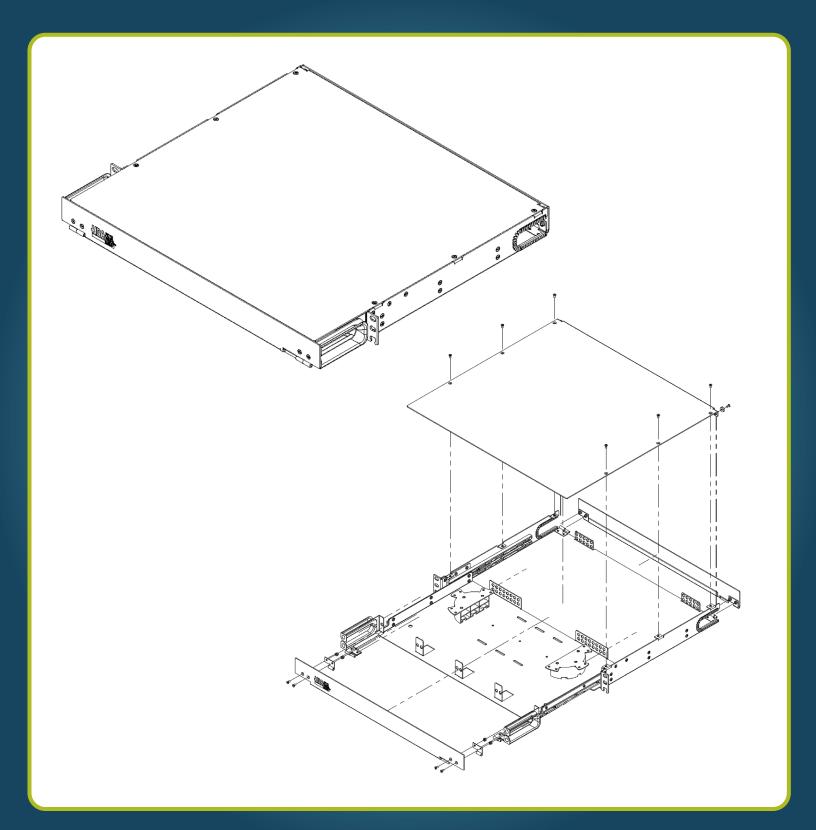



Broadband: (888) 235-2097 Datacom: (800) 523-6075