

# Zinwave 5000 Series

UL2524 Certified

**WILSON**  
CONNECTIVITY

NEMA 4 & UL50E rated enclosure. Protects rack-mounted equipment from water and dust ingress.

- Integrated alarm annunciator, indicating:
  - Loss of normal AC power supply.
  - System battery charging failure.
  - Low battery at 70% reduction of OC.
- Compatible with any standard 19" rack.
- NEMA 4 and UL50E certified.
- 12 hour battery life.



Enclosure



Enclosure with components



Battery Enclosure



Optical Remote Unit

## Enclosure Specifications

<b>Model</b>	790001
<b>Color</b>	Powder Coat Matte Red
<b>Material</b>	CRS Sheet Metal
<b>Dimensions</b>	19.52 x 34.72 x 25.22 (in.) / 496 x 882 x 640.6 (mm)

## Component SKUs




<b>Primary Hub</b> ●	305-0001
<b>Secondary Hub(s)</b> ●	305-1004
<b>Power Inverter</b> ●	780002
<b>Power Plant</b> ●	780001
<b>Battery Enclosure w/LiFePO4 Battery</b>	791001 / 781002
<b>Optical Remote Unit</b>	305-0007-R

Website: [wilsonconnectivity.com](http://wilsonconnectivity.com) Email: [support@wilsonelectronics.com](mailto:support@wilsonelectronics.com) Customer Support: +1 866 294 1660 Mon - Sat

# Zinwave 5000 Series

UL2524 Certified

**WILSON**  
CONNECTIVITY

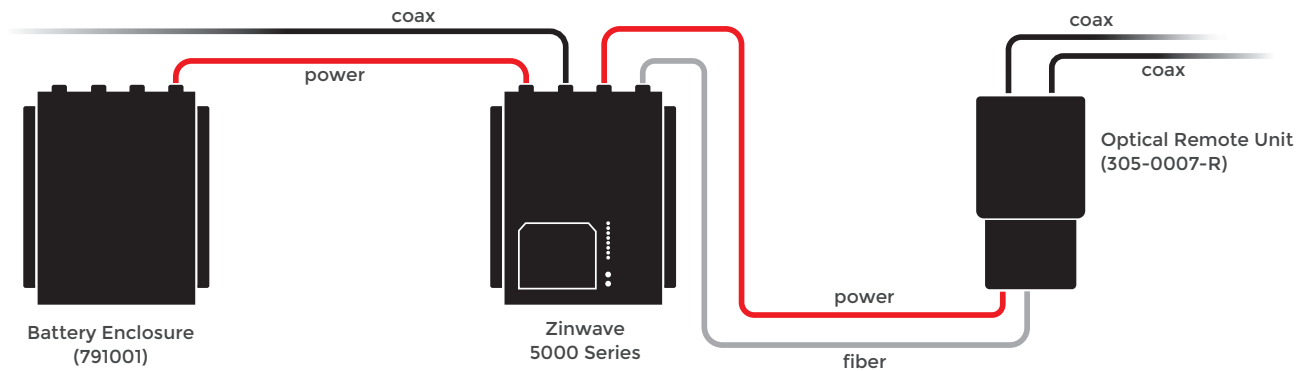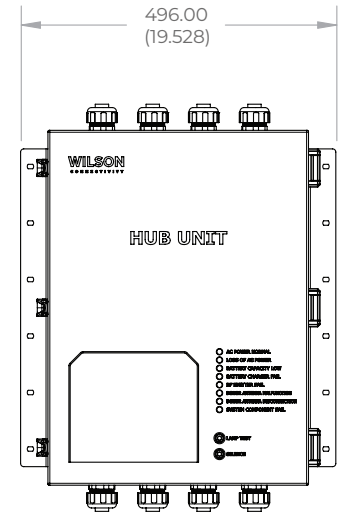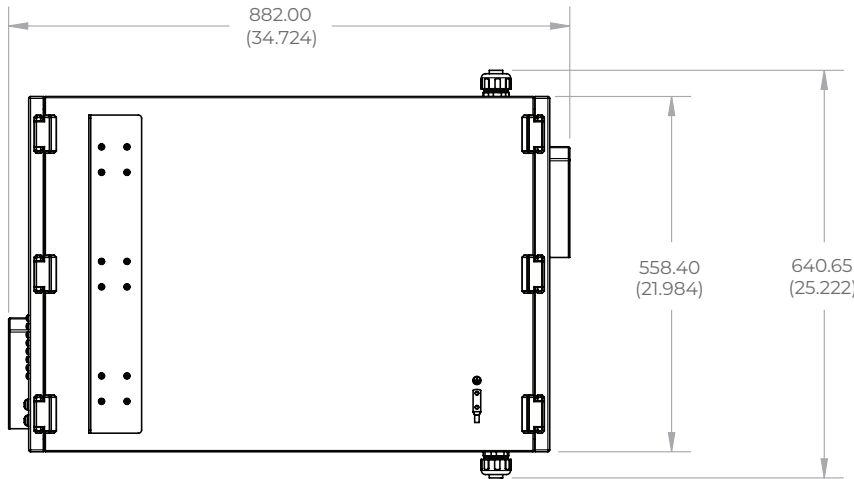

Website: [wilsonconnectivity.com](http://wilsonconnectivity.com) Email: [support@wilsonelectronics.com](mailto:support@wilsonelectronics.com) Customer Support: +1 866 294 1660 Mon - Sat

790001\_5000Series\_WilsonConnectivity\_SpecSheet\_03.12.25