



SET SCREW
PLUG SP3/0

5/16 INTERNAL HEX
PRESSURE SCREW

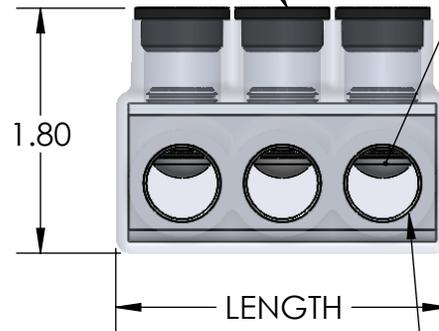

IPL3/0-3C SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPL3/0-3C	3	2.63
IPL3/0-4C	4	3.41
IPL3/0-5C	5	4.19
IPL3/0-6C	6	4.97
IPL3/0-8C	8	6.53
IPL3/0-10C	10	8.09
IPL3/0-12C	12	9.65
IPL3/0-14C	14	11.21

WIRE ENTRY PORT
WIRE RANGE: 3/0KCMIL - #6 AWG
PRE-FILLED W/ OXIDE INHIBITOR

CONTACT NSI FOR SALES @ 800.321.5847

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
- COLD TEMPERATURE RATED TO -45°C.
- HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT.

		POLARIS SALES . CO . INC					
PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556					
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		TITLE: CLEAR INSULATED 3/0 CONNECTOR					
<table border="1"> <tr> <th>NAME</th> <th>DATE</th> </tr> <tr> <td>T.MITCHELL</td> <td>11/2021</td> </tr> </table>		NAME	DATE	T.MITCHELL	11/2021	DWG. NO. IPL3/0C	
NAME	DATE						
T.MITCHELL	11/2021						
MATERIAL: N/A		SCALE: N/A	SHEET: 1 OF 1				