




8275-92

UV Protek™ Outdoor Grade Surface Protection Tape

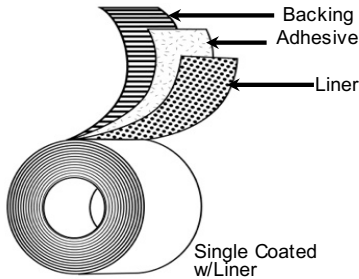

- Backing:** Exterior-Grade Aliphatic Polyurethane
- Adhesive:** Regenerative UV Acrylic (A227)
- Liner:** 94# Kraft Paper
- Colors:** Clear
- Specifications:** N/A
- Size Options:** Incremental sizes 1/4" - 48" x 108Ft

Applications

- Surface protection on high-wear surfaces prone to chipping, scratching, or weathering
- Protects outdoor plastics and teak furniture
- Long-term protection for marine and other outdoor equipment
- Leading edge protection for turbine blades

Features

Benefits

- | | |
|---|---|
| <ul style="list-style-type: none"> • Polyurethane Film Backing • Regenerative UV Acrylic • Kraft Paper Release Liner | <ul style="list-style-type: none"> • Provides UV protection for outdoor use • Abrasion resistant • Excellent aging characteristics, non-yellowing • Transparent to allow for visual inspection • Strong permanent bond • Removes clean from most surfaces • Will not lift, stain, or dry out • Smooth clean release - easy to use • Die cuttable |
|---|---|

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	7.5	mils	0.191	mm	PSTC-133
Substrate Thickness	6.0	mils	0.152	mm	PSTC-133
Adhesion to Steel (Initial)	35	oz/in	3.83	N/cm	ASTM D-3330
Adhesion to Steel (@ 20 mins)	45	oz/in	4.92	N/cm	ASTM D-3330
Tensile Strength	50	lb/in	87.56	N/cm	ASTM D-3759
Puncture Resistance	25	lbs	11.34	kg	ASTM D-1000
Elongation	500%				
Weight	6.40	oz/yd ²	217.00	g/m ²	
Abrasion/Wear Index	0				ASTM D-4060
Operating Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-10 to 250 °F		-23 to 121 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
 www.berryglobal.com
 10/8/17