
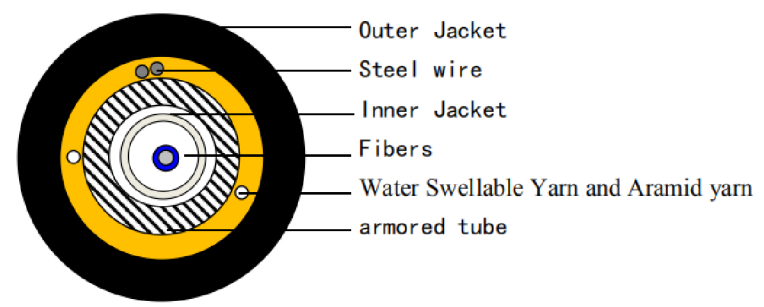


REV	MODIFICATION	UPDATE DATE	SIGNATURE

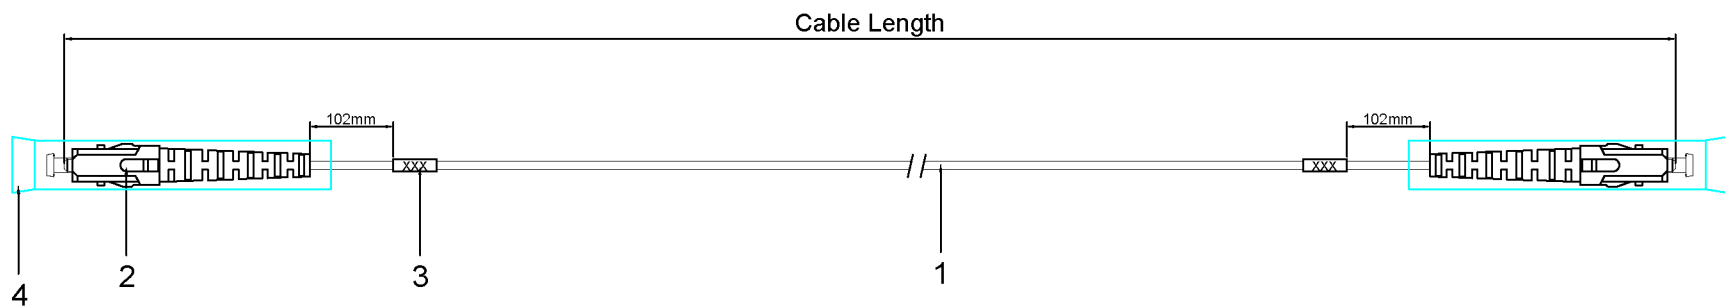

NOTES:  
 1. Insertion loss  $\leq 0.2\text{dB}$   
 2. Return loss  $\geq 60\text{ dB}$

Cable Length	Tolerance
Cable Length < 1M	5cm
1M $\leq$ Cable Length < 10M	10cm
10M $\leq$ Cable Length < 50M	30cm
Cable Length $\geq 50\text{M}$	Cable Length $\pm 1\%$

4	2	Clear Jacket	
3	2	Cable Label	(25*30mm)
2	2	SC/APC SM 3.0 Connector (Green Housing Green Boot), housing not installed	SC/APC 3.0
1	A/R	OD:3.0mm, Singlemode 9/125 G657A2, Simplex, Armored, PBT, Black, Anti-UV	$\varnothing 3.0\text{mm}$ , G657A2(2 0.12mm), PBT,
ITEM	QTY	SPECIFICATIONS	
			P/N: S-xxxxxx-NSHx3x-xxxF

	DRAW	DATE	11-12-2020	TITLE: Fiber Optic Patch Cord with SC Pushable Assembly			
	CHECK	APPROVED		CUSTOMER NO	DWG NO	REV	A