

SET SCREW  
PLUG SP750


CABLE ENTRY  
PLUG CP750

IPLD750-5C SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPLD750-3C	3	4.95
IPLD750-4C	4	6.38
IPLD750-5C	5	7.80
IPLD750-6C	6	9.23
IPLD750-7C	7	10.65
IPLD750-8C	8	12.08
IPLD750-10C	10	14.93
IPLD750-12C	12	17.78
IPLD750-13C	13	19.21
IPLD750-14C	14	20.63

WIRE ENTRY POINT  
WIRE RANGE: 750KCMIL - 1/0  
PRE-FILLED W/ OXIDE INHIBITOR

3/8 INTERNAL HEX PRESSURE SCREW

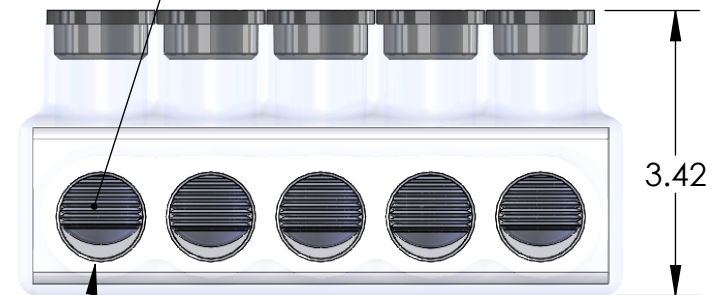

CONTACT NSI FOR SALES @ 800.321.5847

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 75°C COPPER AND/OR ALUMINUM CONDUCTOR.
- COLD TEMPERATURE RATED TO -45°C.
- HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT



**POLARIS**  
SALES . CO . INC

PROPRIETARY AND CONFIDENTIAL

11625 PROSPEROUS DRIVE ODESSA, FL 33556

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.

TITLE:

CLEAR INSULATED DUAL ENTRY 750 CONNECTOR

NAME DATE  
DRAWN BY T.MITCHELL 10/2021

DWG. NO.

IPLD750C

MATERIAL: N/A

SCALE: N/A

SHEET: 1 OF 1