




168-68

High Temp PVC Fineline Masking Tape

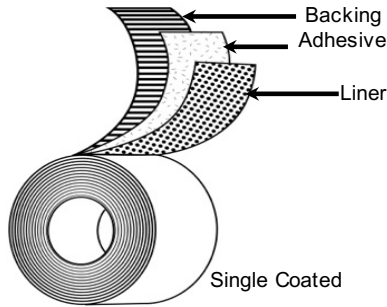

Backing:	PVC Film
Adhesive:	Rubber (R405)
Liner:	66# Clay Coated Kraft
Colors:	Blue Gloss
Specifications:	N/A
Size Options:	Incremental sizes 0.118" - 47.5" x 108Ft

Applications

- Automotive OEM fineline and bulk masking (RIM and TPO plastics)
- High temperature bake cycles (280 °F up to 45m)*
- Clean room paint masking
- OEM paintline and powerwash operations
- Short-term outdoor masking
- Autobody aftermarket fineline color separations
- Automotive metal parts masking

Features

- PVC Film Backing
- Rubber Based Adhesive
- Clean-cut Plastic Core

Benefits

- Solvent and moisture resistant
- Handles compound and tight radius curves
- Crisp, fineline edge
- Printable backing
- Good high temperature performance
- Clean removability after bake cycle
- Recyclable and clean - no dust or contaminants

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.0	mils	0.127	mm	PSTC-133
Substrate Thickness	3.5	mils	0.089	mm	PSTC-133
Adhesion to Steel	26	oz/in	2.84	N/cm	ASTM D-3330
Tensile Strength	11	lb/in	19.26	N/cm	ASTM D-3759
Elongation	160%				
Application Temperature	60 to 120 °F		16 to 49 °C		
Operating Temperature	40 to 280 °F		4.4 to 138 °C		

*Room temperature demask recommended

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F

Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
1-800-343-7875 Fax 1-800-328-4822
www.berryglobal.com

1/9/18