




## MALLEABLE IRON & ZINC INSULATED CONDUIT HUBS

Bridgeport malleable iron and zinc insulated conduit hubs provide a secure connection between rigid or IMC conduit and enclosures in wet or dry locations.

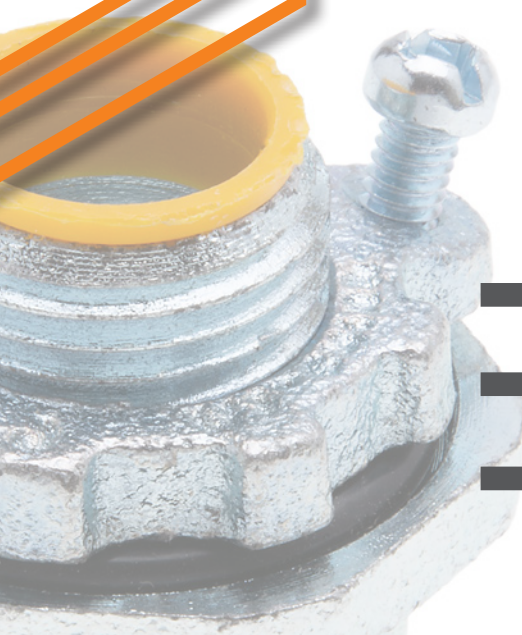

- **INSULATED THROAT**  
protects wires, rated to 105°C
- **CAPTIVE BUNA-N O-RING**  
protects installations from contaminants
- **MEETS CODE REQUIREMENTS**  
cULus - UL514B E20412, E9391  
CSA Standard: C22.2 No.18  
NEMA FB-1  
NEC Article 250
- **SUITABLE**  
for wet locations
- **ENHANCED**  
vibration resistance
- **SET SCREW**  
added for enhanced securement

### MALLEABLE IRON

BPT Cat#	TRADE SIZE	LENGTH	MATERIAL	COATING	UNIT QTY	PKG QTY	UPC
151-MI	1/2"	1.45"	MALLEABLE IRON	GALVANIZED	25	100	781747301512
152-MI	3/4"	1.51"			25	100	781747301529
153-MI	1"	1.79"			10	50	781747301536
154-MI	1 - 1/4"	2.02"			5	25	781747301543
155-MI	1 - 1/2"	2.05"			2	20	781747301550
156-MI	2"	2.14"			2	20	781747301567
157-MI	2 - 1/2"	2.91"			1	5	781747301574
158-MI	3"	3.15"			1	5	781747301581
159-MI	3 - 1/2"	3.21"			1	5	781747301598
160-MI	4"	3.40"			1	5	781747301604
161-MI	5"	3.60"			1	1	781747301611
162-MI	6"	3.78"			1	1	781747301628

CONT'D ON REVERSE





DIE CAST ZINC						
BPT Cat#	TRADE SIZE	LENGTH	MATERIAL	UNIT QTY	PKG QTY	UPC
151-DC	1/2"	1.375"	DIE CAST ZINC ALLOY	25	100	781747091512
152-DC	3/4"	1.5"		25	100	781747091529
153-DC	1"	1.8"		10	50	781747091536
154-DC	1 - 1/4"	1.94"		5	25	781747091543
155-DC	1 - 1/2"	1.955"		2	20	781747091550
156-DC	2"	2.067"		2	20	781747091567
157-DC	2 - 1/2"	2.5"		1	5	781747091574
158-DC	3"	2.560"		1	5	781747091581
159-DC	3 - 1/2"	2.620"		1	5	781747091598
160-DC	4"	2.620"		1	5	781747091604