




## NOTES:

- 1.) PART A IS PLATED ELECTROLESS NICKEL .0001 MIN-.0003 MAX.
  2.) PART UP IS UNPLATED
  3.) BREAK ALL SHARP CORNERS
  4.) REF. BAR-17 (1" HEX SOLID)

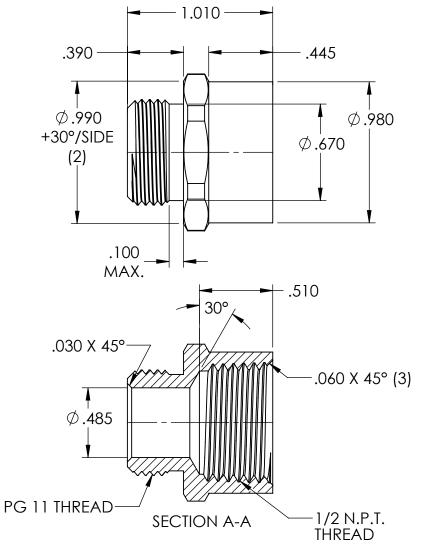

,		,							
REV.	DATE	CHANGE	UNLESS OTHERWISE SPECIFIED:		NAME	DATE		8	
A	2/5/02	DRAWING RELEASED C.V.	IOLERANCES:	DRAWN	JCN	7/15	(E	BRIDGEPO	RT
				CHECKED				<u> </u>	
В	2/7/02	REVISED PLATING SPEC.	ONE PLACE DECIMAL ±.015  TWO PLACE DECIMAL ±.010	ENG APPR.			TITLE:		
С	2/18/02	"D" BORE DEPTH WAS THREAD DEPTH	THREE PLACE DECIMAL ±.005	MFG APPR.				ADAPTFR	
D	7/30/15	REDRAWN	INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.					
	7,00,10		MATERIAL ALUMINUM	PROPRIETARY AND CONFIDENTIAL  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF REMKE INDUSTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF REMKE INDUSTRIES		SIZE DWG.			
			NICKEL PLATED			<b>A</b> RA	PG-11M5	OF-A	
		DO NOT SCALE DRAWING		IS PROHIBITED.			SCALE: 1.5:1	SHEET 1 OF	
5 4		3	2			1			