


## High Strength Waterproof Tape

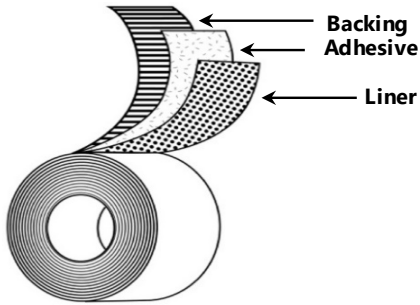

<b>Backing:</b>	Low Permeability PE Film
<b>Adhesive:</b>	Synthetic Rubber
<b>Liner:</b>	PET Film
<b>Colors:</b>	Black, White
<b>Specifications:</b>	N/A

### Applications

- Secure/seal vapor barrier materials for concrete walls and floors
- Sealing heavy-duty floor covering and protection materials
- Waterproof patch and repair applications on sheet metal, aluminum, copper, PVC, plastic sheeting, tarps, pool liners, and more
- Waterproof bundling

### Features

- Polyethylene Film Backing
- Rubber Adhesive
- PET Film Liner

### Benefits

- Tough and durable
- Exceptional vapor barrier properties
- Conformable
- Bonds to a variety of surfaces both underwater and out-of water
- Remains pliable - doesn't dry, harden, or crack
- Forms permanent, water-tight bond
- Excellent all-temperature performance
- Easy to remove and use

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness (w/o liner)</b>	15.0 mils	0.381 mm	ASTM D-1000
<b>Adhesion to Steel</b>	170 oz/in	18.6 N/cm	PSTC-101
<b>Adhesion to Backing</b>	175 oz/in	19.1 N/cm	PSTC-101
<b>Tensile Strength</b>	23 lb/in	40 N/cm	ASTM D-1000
<b>Elongation</b>	600%		
<b>Permeance</b>	0.03 US Perms		ASTM F1249
<b>Installation Temperature</b>	30 to 140 °F	-1 to 60 °C	
<b>Operating Temperature</b>	-30 to 165 °F	-34 to 74 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 12 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.

2320 Bowling Green Road | Franklin, KY 42134  
1-800-343-7878 Fax 1-800-328-4822

www.vybond.com

6/17/25