


The Dyna-Clamp is an efficient way to secure flex or rigid round duct connections. The stainless steel band can withstand up to 60 PSI, as well as extreme temperature conditions. -100°C to +220°C is the normal temperature range for 201 stainless steel. The band is secured in place at the bridge by a slotted hex head screw. This zinc plated carbon steel screw can be flipped up away from the band to offer a quick release when adjustments are needed. Dyna-Clamps are available in stock sizes ranging from a 7" diameter to 20". Two or more clamps can also be connected together to accommodate duct diameters over 20".



FEATURES:

- Manufactured from 200 series stainless steel.
- Secures with a 5/16" slotted hex head zinc plated carbon steel screw.
- Each tie is a width of 1/2"
- Dyna-Clamps can handle up to 60 PSI
- Quick Release Feature for easy adjustments.

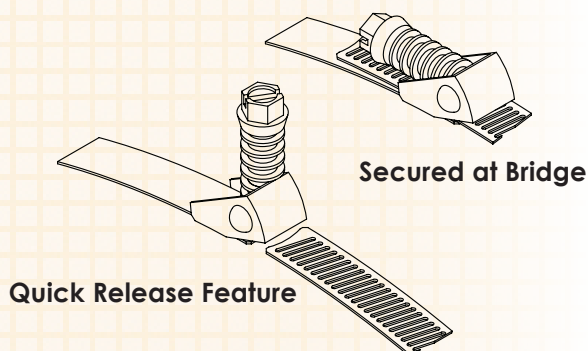

Part#	Code	Description	Minimum Diameter	Maximum Diameter	Overall Length	Quantity
7012	DT7WD	7" Stainless Steel Dyna-Clamp	1.75"	7"	23.5"	100/box
7007	DT8WD	8" Stainless Steel Dyna-Clamp	1.75"	8.5"	28.25"	100/box
7008	DT10WD	10" Stainless Steel Dyna-Clamp	1.75"	10"	33"	100/box
7009	DT12WD	12" Stainless Steel Dyna-Clamp	1.75"	12.25"	40"	100/box
7010	DT15WD	15" Stainless Steel Dyna-Clamp	1.75"	15"	48.75"	100/box
7011	DT16WD	16" Stainless Steel Dyna-Clamp	1.75"	16.25"	52.5"	100/box
7013	DT18WD	18" Stainless Steel Dyna-Clamp	1.75"	18.5"	57.31"	100/box
7044	DT20WD	20" Stainless Steel Dyna-Clamp	1.75"	20"	63.58"	100/box

Duro Dyne Corporate Headquarters, Bay Shore, NY
631-249-9000 • Fax: 631-249-8346
Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
www.durodyne.com • E-mail: durodyne@durodyne.com