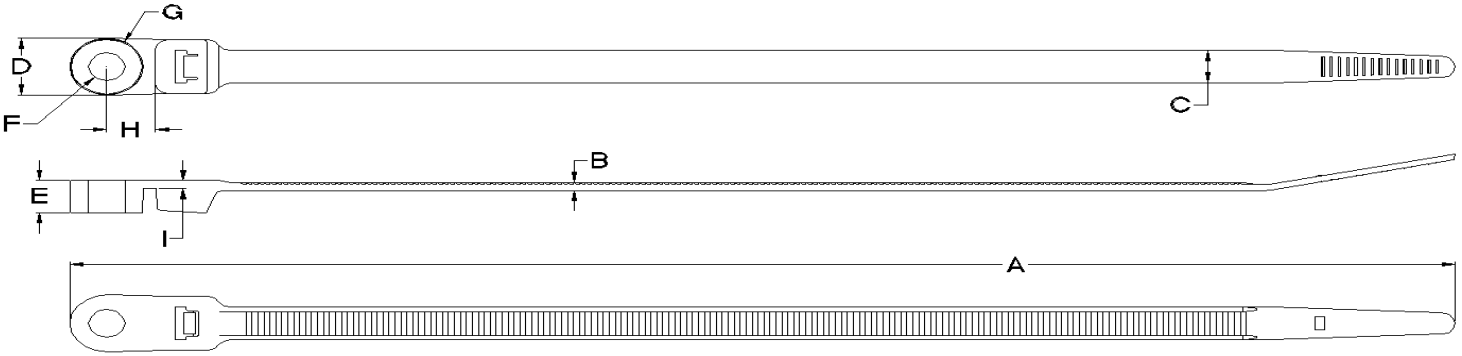

NSI INDUSTRIES PART NUMBER	BUNDLE DIAMETER		A IN (mm) +/- .030 (.762mm)	B IN (mm) +/- .005 (.127mm)	C IN (mm) +/- .005 (.127mm)	D IN (mm) +/- .020 (.508mm)	E IN (mm) +/- .020 (.508mm)	F IN (mm) +/- .005 (.127mm)	G IN (mm) +/- .020 (.508mm)	H IN (mm) +/- .030 (.762mm)	I IN (mm) +/- .020 (.508mm)	MIN LOOP TENSILE LBS (n)	ANSI/UL 94 Mtl FLAMABILITY RATING
	MIN IN (mm)	MAX IN (mm)											
7500MH-IR	.062 (1.587mm)	1.750 (44.450mm)	8.000 (203.200mm)	.052 (1.320mm)	.177 (4.495mm)	.364 (9.245mm)	.183 (4.468mm)	.208 (5.283mm)	.361 (9.169mm)	.325 (8.255mm)	.049 (1.244mm)	50 (222)	HB
141200MH-IR	.187 (4.762mm)	4.062 (103.174mm)	15.750 (400.050mm)	.075 (1.905mm)	.298 (7.569mm)	.513 (13.030mm)	.298 (7.569mm)	.256 (6.502mm)	.510 (12.954mm)	.345 (8.763mm)	.074 (1.879mm)	120 (534)	HB

nsi INDUSTRIES

HIGH TEMP, UV & IMPACT RESISTANT MOUNTING HEAD SERIES CABLE TIES

COLOR DESIGNATIONS:

IT-30 = HIGH TEMP, IMPACT RESISTANT, UV BLACK HEAT STABILIZED

MATERIAL:

NYLON 6/6 POLYAMIDE

CONFIDENTIAL PROPERTY OF NSI INDUSTRIES, LLC.
THIS DRAWING IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF NSI INDUSTRIES, LLC.