



SUBMITTAL DATA SHEET

Mini White 4.5

Mini Split Condensate Pump Kit
100-250VAC, 50/60Hz

Project Information:

Job Name: _____

Location: _____

Engineer: _____

Contractor: _____

Distributor: _____

Submitted to: _____

For: Reference Approval Construction

Submitted by: _____

Reference: _____

Submittal Information:

Approval: _____

Date: _____

Construction: _____

Contractor: _____

Distributor: _____

Unit #: _____

Drawing #: _____

Estimated Qty: _____

(Sec. I) Product Specifications:

Max. flow	5 US Gallons (20L/h) @ 0m head
Max. rec. head	33ft. / 10m
Min. dB(A) @ 1m	21dB(A)*
Power supply	100-250V, 50/60Hz, 0.16A/ 5W
Rated	Continuous
Class	II
Max. unit output	26kW / 90,000BTU/h / 7.5 tons
Max. water temp	104°F (40°C)
IP Protection	IP24
Inlet o/d	5/8" - 7/8" (Ø16mm-Ø23mm)
Outlet o/d	1/4" (Ø6m)
Safety switch	High level safety wires N.C. contacts, 250 VAC, 3A max
Self priming	✓

Ensure ALL cleaning chemicals are flushed out of the reservoir after use.
*Assuming solid wall construction with a 2kW unit.

(Sec. II) Ordering Information:

Product	FP3578/MG
Model	Mini White (4.5 Gen)
Carton Qty	Qty: 1
Carton Weight	1.54lbs.

(Sec. III) Carton Contents:

- Mini White 4.5 Gen Pump
- Hardwired 5' (1.5m) Power Cable
- Fitting template (on the box)
- Quick Start Guide


(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

Mounted under mini split equipment
– left or right handed

Mini White | 100-250VAC, 50Hz/60Hz US Gallons

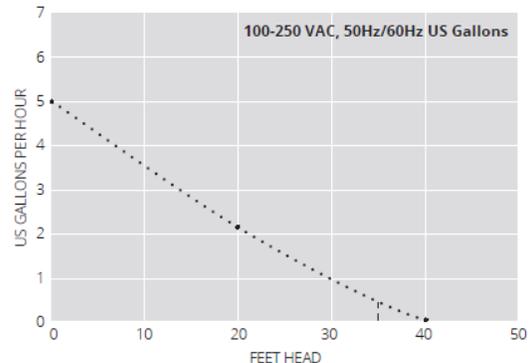

Pump Selector and Wiring Diagrams available at:

