

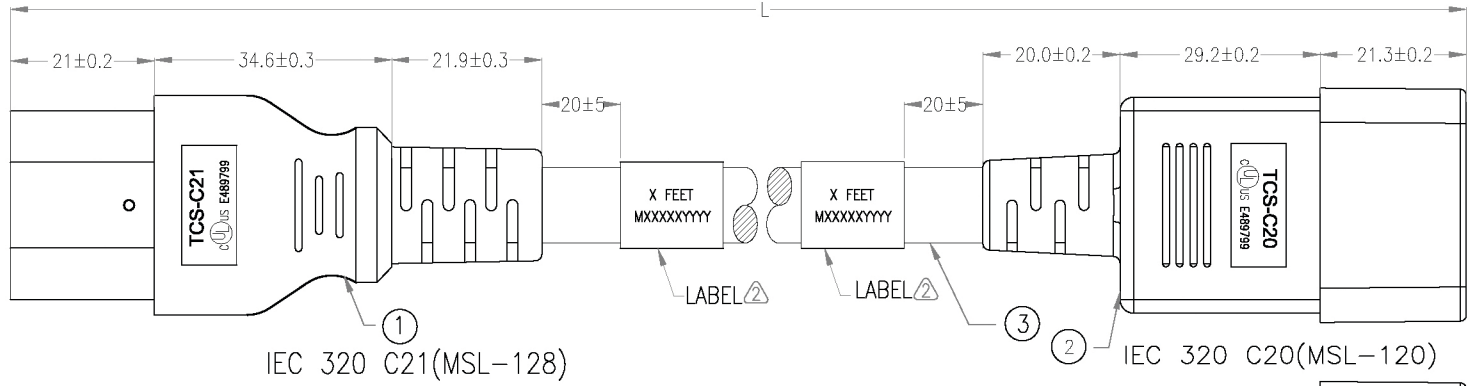


P1: M-070A


P2: M-063A

Customer No.: No.:1




PACKING: 10PCS IN A POLYBAG

PACKING A: <3FT




PACKING B: >=3FT



NOTE: All relevant materials are complied with RoHS directive  
THE CABLE MARKING IS CONCAVE LETTERING MOULD

MARKING: (UL) SJT 3/C 12AWG(3.31MM<sup>2</sup>) VW-1 105°C 300V E495164  
C (UL) SJT 3/C 3.31MM<sup>2</sup>(12AWG) FT2 105°C 300V E495164 TCS

120128B2F12C(FP258-02)			
	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

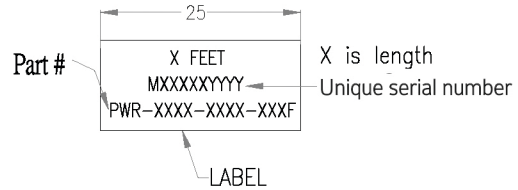

3	UL SJT 12AWG x 3C, OD 11.0mm, JACKET SEE LIST, DRAWING No. EPSJT011203C-163	H5TC48-0304	L-30mm	M304
2	MOLDED PVC 35P, BLACK	H1BC02-0304		M304
	BRACKET: YST-038	A1QC37-0767	1	M767
	TERMINAL: 97607BS-1	A1QB35-0257	1	M257
1	TERMINAL: 97606BS-1	A1QB34-0257	2	M257
	MOLDED PVC 35P, BLACK	H1BC02-0304	1	M304
	BRACKET: Y-037(MSL-128)	A1QC38-0767	1	M767
	TERMINAL: 98739ABS-0	A1QB33-0257	3	M257

No.	DESCRIPTION			Q'TY	Supplier
APPROVED					Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	09/MAY/19	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	CAI	09/MAY/19	PRODUCT NO.	PWR-10JL-02xx-xxxF	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm