


IPL750-3 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPL750-3	3	4.95
IPL750-4	4	6.38
IPL750-5	5	7.80
IPL750-6	6	9.23
IPL750-8	8	12.08
IPL750-10	10	14.93

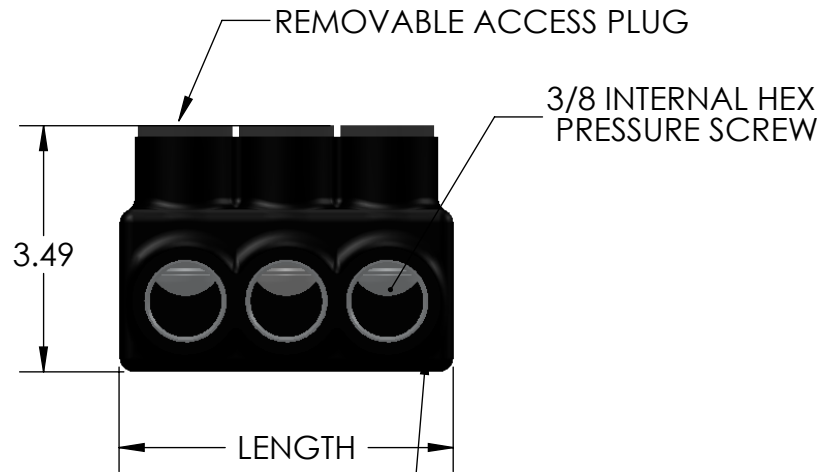

WIRE ENTRY PORT
 WIRE RANGE: 750KCMIL -1/0
 PRE-FILLED W/ OXIDE INHIBITOR

CONTACT NSi FOR SALES @ 800.321.5847



POLARIS
 SALES . CO . INC

PROPRIETARY AND CONFIDENTIAL

11625 PROSPEROUS DRIVE ODESSA, FL 33556

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.

TITLE:

INSULATED 750
 CONNECTOR

	NAME	DATE
DRAWN BY	S.PARRY	06/2012

DWG. NO.

IPL750-

MATERIAL: N/A

SCALE: N/A

SHEET: 1 OF 1

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 75°C COPPER AND/OR ALUMINUM CONDUCTOR.
- COLD TEMPERATURE RATED TO -45°C.
- HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION, CHEMICAL AND UV RESISTANT.