


IPLD2-5C SHOWN


PART NUMBER	NO. OF PORTS	LENGTH
IPLD2-3C	3	1.75
IPLD2-4C	4	2.26
IPLD2-5C	5	2.77
IPLD2-6C	6	3.28
IPLD2-8C	8	4.30
IPLD2-10C	10	5.32
IPLD2-12C	12	6.34
IPLD2-14C	14	7.36

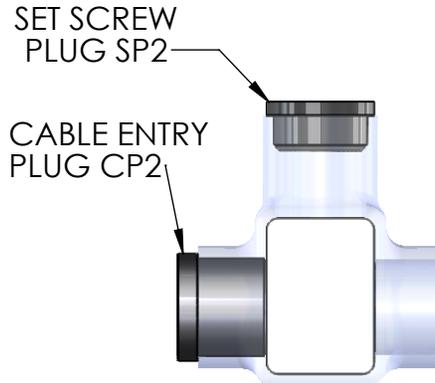

CABLE ENTRY PLUG CP2

SET SCREW PLUG SP2

WIRE ENTRY PORT
WIRE RANGE: #2 - #14 AWG
PRE-FILLED W/ OXIDE INHIBITOR

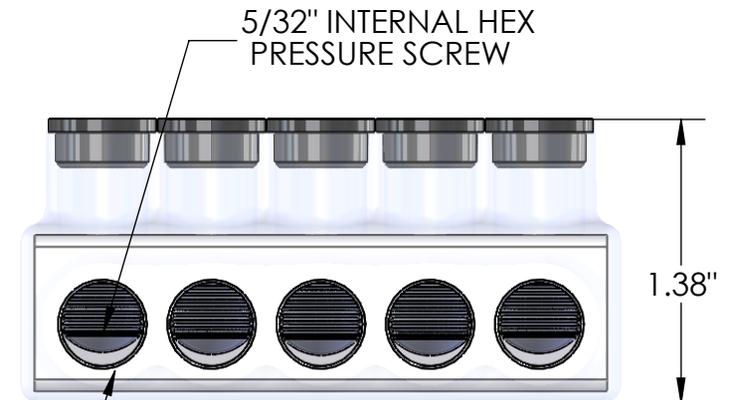

5/32" INTERNAL HEX PRESSURE SCREW

CONTACT NSi FOR SALES @ 800.321.5847

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
- COLD TEMPERATURE RATED TO -45°C.
- HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT.

		POLARIS SALES . CO . INC	
PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		TITLE: CLEAR INSULATED DUAL ENTRY #2 CONNECTOR	
NAME		DWG. NO.	
DATE		IPLD2C SERIES	
DRAWN BY T.MITCHELL		11/2021	
MATERIAL: N/A		SCALE: N/A	
		SHEET: 1 OF 1	