


BLOWER CONTROL

BC7070


"ON/OFF" TIME DELAY RELAY

TYPICAL WIRING DIAGRAM:

Showing connections when using BC Series Blower Controls.

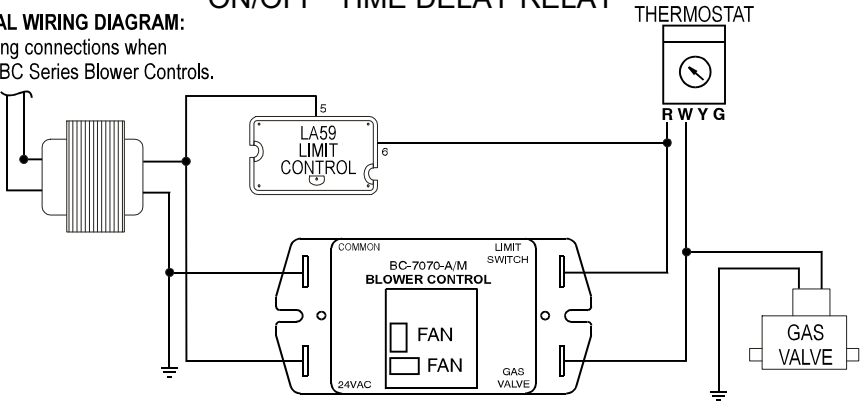

DIMENSIONS:

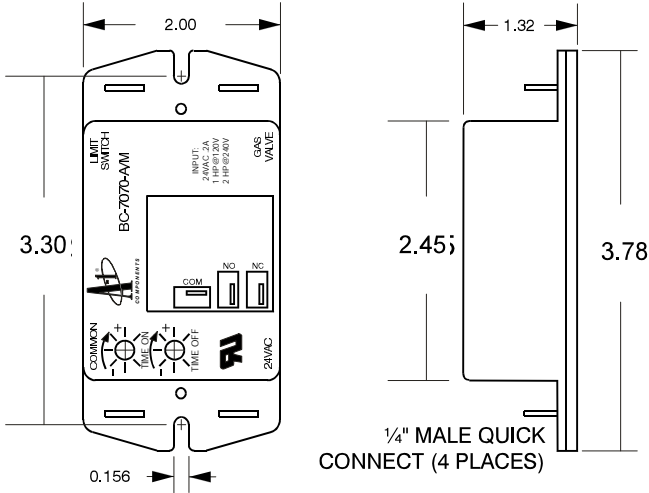

1. INPUT

Voltage: 18-30 volts AC, 50/60 Hz
125 milliamp max.

2. OUTPUT

1 HP @ 120 VAC
2 HP @ 240 VAC

3. TIME DELAY

Adjustable On & Off 0-4 minutes
Tolerance $\pm 20\%$

4. MECHANICAL

Mounting: Surface mount with 2 #6 screws.
Package: Molded ABS housing.
Circuit: Conformal coated PCB
Connections: 1/4" male quick connect

5. ENVIRONMENTAL

Operating Temperature: -40°F to $+175^{\circ}\text{F}$
Storage Temperature: -40°F to 185°F
Humidity: To 95%rh non-condensing.



COMPONENTS
163636b

Sealed Unit Parts Co., Inc.
Allenwood NJ 08720
www.supco.com