


## Polyethylene Screenblock Tape

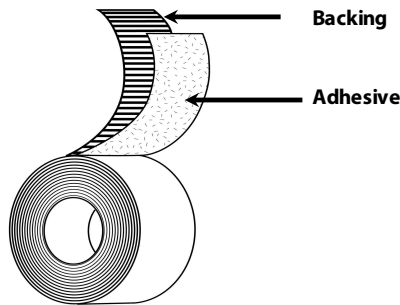

**Backing:** Polyethylene Film

**Adhesive:** Rubber

**Liner:** N/A

**Colors:** Red

**Specifications:** N/A

**Standard Sizes:** 48mm x 55m, 72mm x 55m

### Applications

- Used to block screens from moisture and chemicals during screen printing
- General purpose industrial bundling, patching, wrapping, and repairing

### Features

- Polyethylene Film Backing
- Natural rubber based adhesive

### Benefits

- Conformable and flexible
- Excellent durability and solvent resistance
- Red for high visibility
- High tack for a secure bond
- Repositionable and clean removal - no residue

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	8.0 mils	0.203 mm	ASTM D-1000
<b>Adhesion to Steel</b>	60 oz/in	6.56 N/cm	PSTC-101
<b>Tensile Strength</b>	21 lb/in	36.78 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>Elongation</b>	70%		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.