


Premium Wire Harness Tape

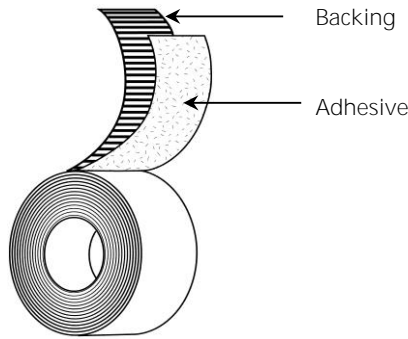

Backing: Polymeric Composite
Adhesive: Gray Blended Rubber
Temp. Resistance: 85 °C (continuous)
Colors: Black
Standard Sizes: 1.5in x 60yd, 48mm x 55m
Specifications: Delphi Packard (GM) M0537
 FMVSS-302
 RoHS Compliant

Applications

- Wire harness and convolute splicing
- Waterproofing
- Permanent bonding and high performance applications

Features

- PE-Coated Cloth Backing
- Natural rubber based adhesive

Benefits

- Conforms well to irregular surfaces
- Resists twisting and curling
- High adhesion
- Moisture resistant
- Low VOC

Typical Test Values

| | Standard UOM | | Metric UOM | | Test Method |
|---------------------|--------------|-------|------------|------|-------------|
| Total Thickness | 10.0 | mils | 0.254 | mm | ASTM D-1000 |
| Adhesion to Steel | 46 | oz/in | 5.03 | N/cm | PSTC-1 |
| Adhesion to Backing | 43 | oz/in | 4.70 | N/cm | PSTC-1 |
| Tensile Strength | 23 | lb/in | 40.25 | N/cm | ASTM D-1000 |
| Elongation | 12% | | | | ASTM D-1000 |
| Temperature Rating | 85 °C | | | | |
| Shelf Life at 25 °C | 36 Months | | | | |

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.