


## Professional Grade Duct Tape

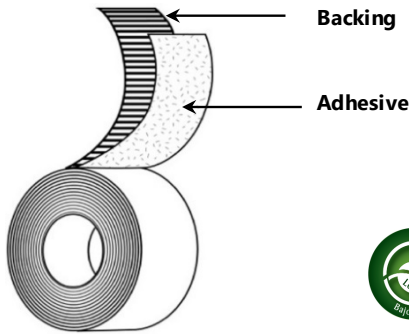

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Silver, Black
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 48mm x 55m, 72mm x 55m

### Applications

- Hanging and seaming poly sheeting
- Sealing and closure tape for poly bags
- General purpose duct and insulation sealing
- General purpose packaging and repair
- Temporary holding and bundling

### Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Low VOC Content

### Benefits

- Good balance of tensile strength and tearability
- Conformable and moisture resistant
- Aggressive high adhesion
- Superior vertical hold
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	11 mils	0.279 mm	ASTM D-1000
<b>Adhesion to Steel</b>	100 oz/in	70.61 N/cm	PSTC-101
<b>Adhesion to Backing</b>	45 oz/in	31.77 N/cm	PSTC-101
<b>Tensile Strength</b>	24 lb/in	271.16 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>VOC Content</b>	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.