SPECIFICATION DRAWING

Customer	
P/N	L-DW4A-DE-XX
WKM	R

Description	Revision	

Passed RoHS standard

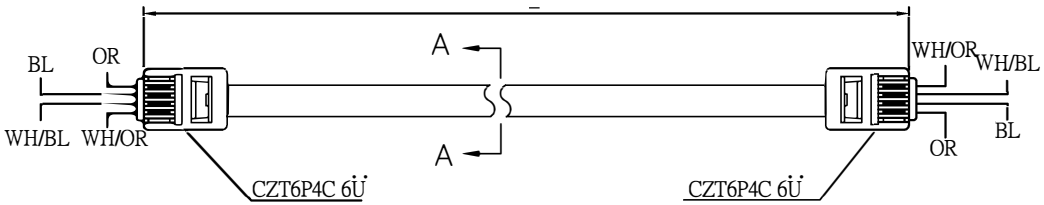

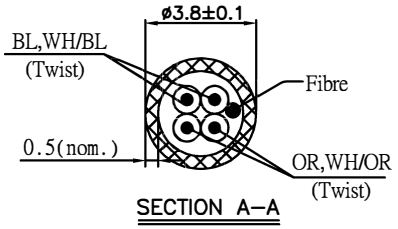

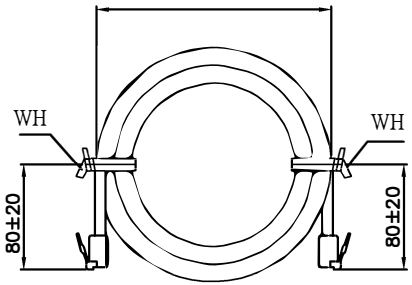

REV.	Description	Date
0	ISSUED VERSION	2006.09.28

S/R NO: 807–194	
Wire Specification	1x0.5x ø0.85x2CTwist(twist pitch:70)x2pair+500D
	fibrex ø 3.8±0.1(tubulate jacket)
Jacket Colour	80151(GY)
Conductor	1x0.5
Insulation Colour	(BL,WH/BL) (OR,WH/OR)(ø0.85±0.05) PP
	/
Cut Length	7625
Normal Length	/
Plug	CZT6P4C 6Ü 1:2
	/
	/
Terminal	/
	/
Tooling	/
	/
	/
	/
Housing	/
Remarks	Cable tie(WH):L-100 1:2
	/
	/
	/
	/
	/
	/

Date		Drawn By	Checked By	Approved By	Tooling	Weight(g)	Unit	Date	Projection
Tab By									
Checked By							mm	2006.09.28	